
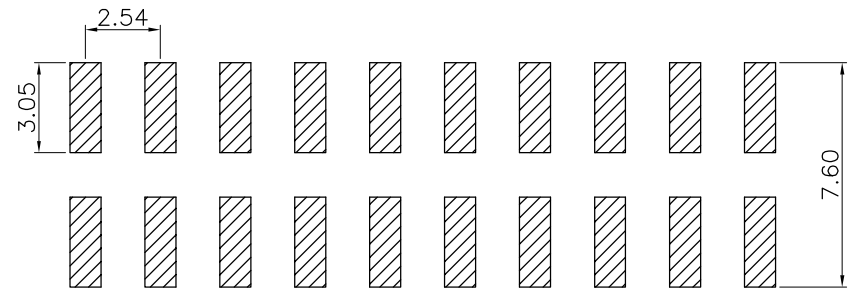
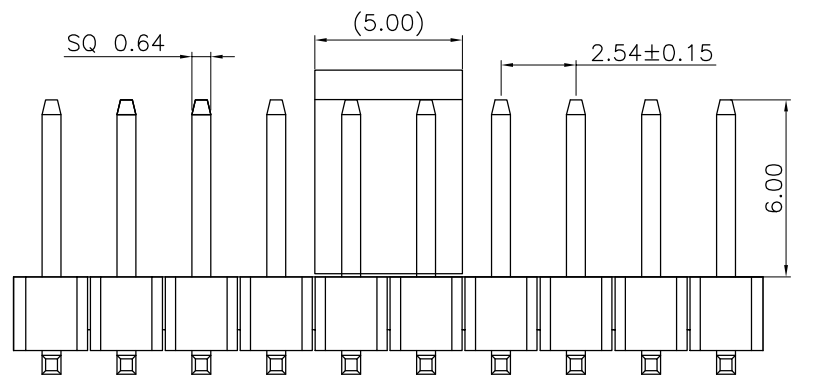
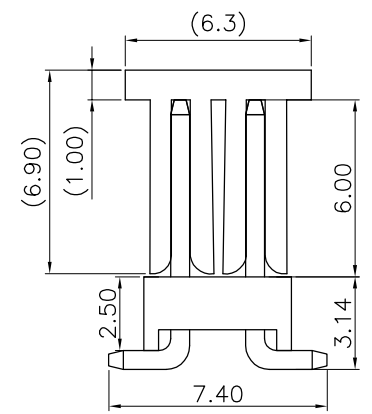


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA6T,UL94V-0
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 GOLD FLASH OVER NICKEL
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 3A
 RATED VOLTAGE : 500V AC/DC
 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 500V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 5.PACKAGE SPEC: REEL
 6.P/N:

PH2541 25 M 0-2 XX 2 X X X 01
 SERIES NO: PH2541
 HEIGHT: 25: 2.5mm
 MALE FEMALE: M-MALE
 ANGLE: 0-180°
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 02~80
 HOUSING:
 1-PA6T+HF
 2-LCP+HF
 3-PBT+HF
 COLOR:
 A-BLACK
 PLATING:
 A-ALL AU G/F
 TERMIPOINT:
 2-SMT

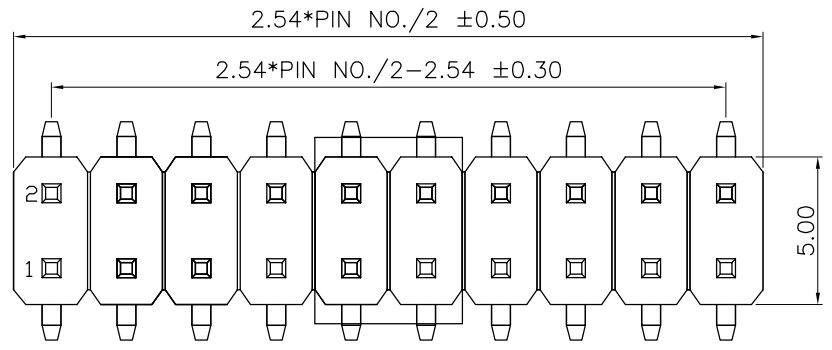

RECOMMENDED P.C.B LAYOUT
 P.C.B TOLERANCE:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH254125M0-2XX2XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15			
			0.0±0.35	X'REF±6'	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.54mm 180°双排 SMT单塑 排针			
			UNIT: mm	0.00±0.25	X'±3'	DRAWN	Gao_Han		21.10.15		
			SIZE: A4	0.000±0.10	X'X' ±2'				REV: A0	SHEET: 1/1	