
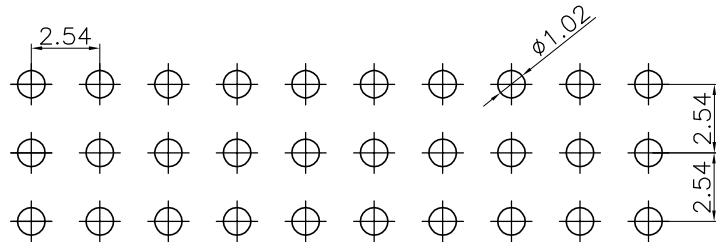

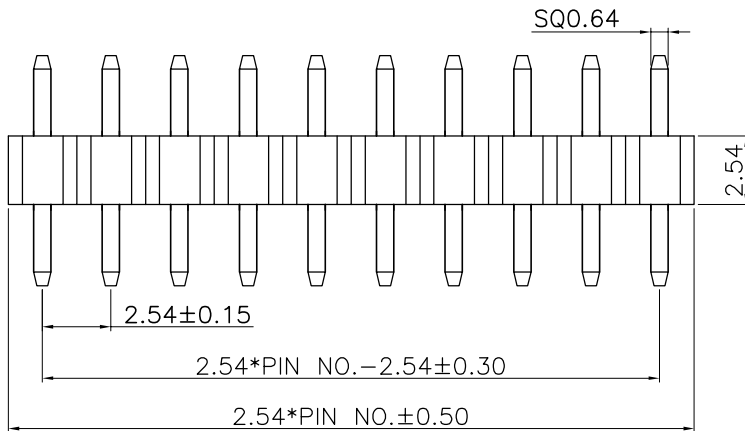


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

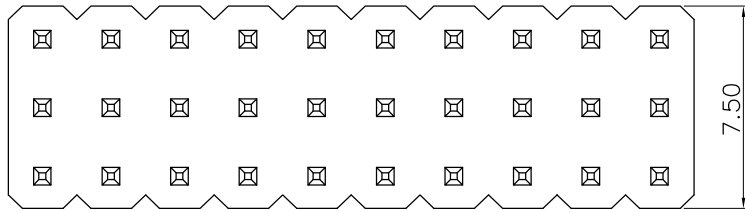

RECOMMENDED P. C. B LAYOUT

P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 0-3 XX 1 X X X 01

SERIES NO: _____ HOUSING: 1-PA6T

HEIGHT: _____ 25: 2.54mm

MALE FEMALE: _____ COLOR: A-BLACK


M-MALE _____ PLATING: A-ALL AU G/F

ANGLE: _____ 0-180°

ROW NO: _____ 3-THREE ROWS

PIN Q'PY: _____ TERMIPOINT: 1-DIP

XX PIN

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.11.17	PH254125M0-3XX1XXX01	
			0.00±0.25	X'±3'		DESIGNER	Han_Gao	21.11.17	TITLE:		REV: A0 SHEET: 1/1
			0.000±0.10	X'X' ±2'		DRAWN	LX_HOU	21.11.17	Pitch 2.54mm 180° 三排 DIP H2.54W7.5 单塑排针 PA3.0 PC3.0		