
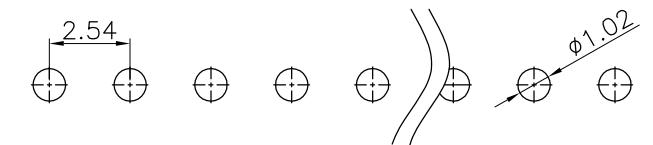
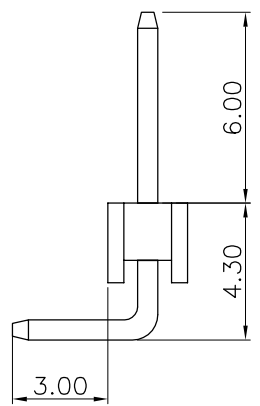
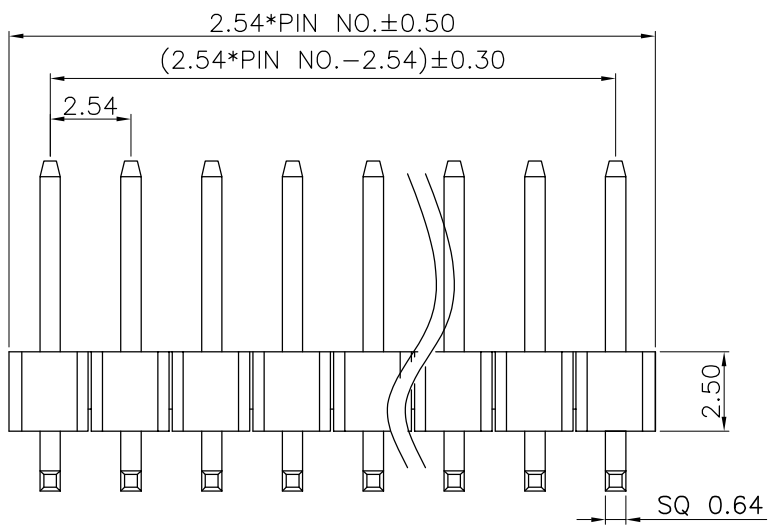


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

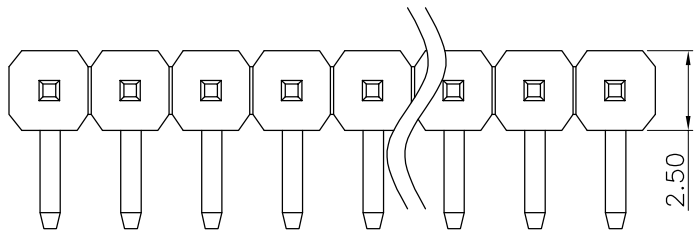

RECOMMENDED P.C.B LAYOUT  
P.C.B TOLERANCE:±0.05

NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING: PA6T,UL94V-0  
 1-2.CONTACTS: BRASS  
 2.PLATING SPECIFICATION:  
 2-1.CONTACTS:  
 GOLD FLASH OVER NICKEL  
 3.ELECTRICAL PERFORMANCE:  
 3-1.CURRENT RATING: 3A  
 3-2.CONTACT RESISTANCE: 30 mΩ MAX  
 3-3.INSULATION RESISTANCE: 1000MΩ Min  
 3-4.DIELECTRIC WITHSTANDING : 500V  
 4.ENVIRONMENTAL PERFORMANCE:  
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.  
 5.PACKAGE SPEC:  
 6.P/N:

PH2541 25 M 9-1 XX 1 X X X 01  
 SERIES NO: PH2541 25 M 9-1 XX 1 X X X 01  
 HEIGHT: 25: 2.5mm  
 MALE FEMALE: M-MALE  
 ANGLE: 9-90°  
 ROW NO: 1-SINGLE ROW  
 PIN Q'PY: 02~40  
 HOUSING: 1-PA6T  
 COLOR: A-BLACK  
 PLATING: A-ALL AU G/F  
 TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	PH254125M9-1XX1XXX01	ENDE05	
			UNIT:mm	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:			
			SIZE: A4	X'X' ±2'	DRAWN	Gao_Han	21.10.15	Pitch 2.54mm 90° 单排 DIP 弯凹槽 PC:3.0			
										REV: A0	SHEET: 1/1