
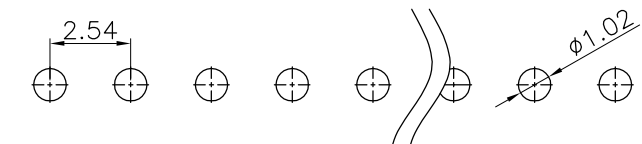
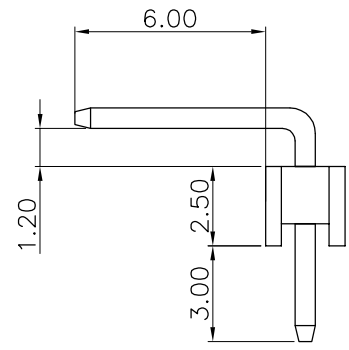
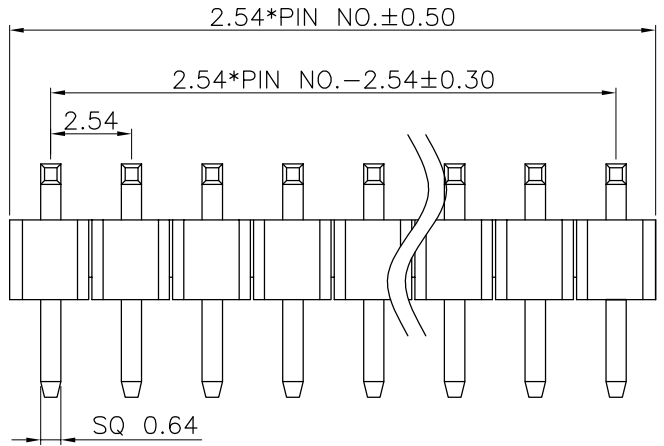


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

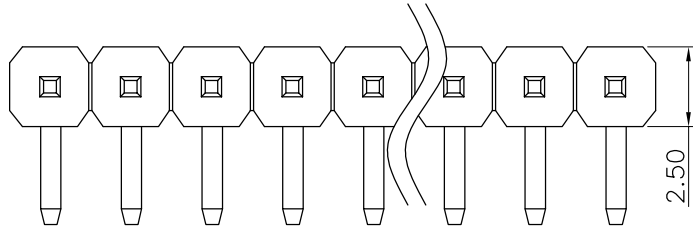

RECOMMENDED P.C.B LAYOUT  
P.C.B TOLERANCE:±0.05

NOTE:  
1.MATERIAL SPECIFICATION:  
1-1.HOUSING: PA6T,UL94V-0  
1-2.CONTACTS: BRASS  
2.PLATING SPECIFICATION:  
2-1.CONTACTS:  
GOLD FLASH OVER NICKEL  
3.ELECTRICAL PERFORMANCE:  
3-1.CURRENT RATING: 3A  
3-2.CONTACT RESISTANCE: 30 mΩ MAX  
3-3.INSULATION RESISTANCE: 1000MΩ Min  
3-4.DIELECTRIC WITHSTANDING : 500V  
4.ENVIRONMENTAL PERFORMANCE:  
4-1.OPERATING TEMPERATURE: -40°C~+105°C.  
5.P/N:

PH2541 25 M 9-1 XX 1 X X X 02  
SERIES NO: | HOUSING: 1-PA6T  
HEIGHT: | 25: 2.5mm  
MALE FEMALE: | M-MALE  
ANGLE: | 9-90°  
ROW NO: | 1-SINGLE ROW  
PIN Q'PY: | 01~40  
COLOR: A-BLACK  
PLATING: A-ALL AU G/F  
TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	PH254125M9-1XX1XXX02	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:		REV: A0    SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15	Pitch 2.54mm 90° 单排 DIP 弯平面		