
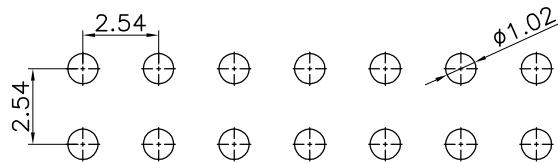
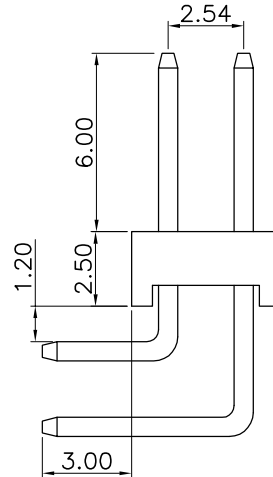
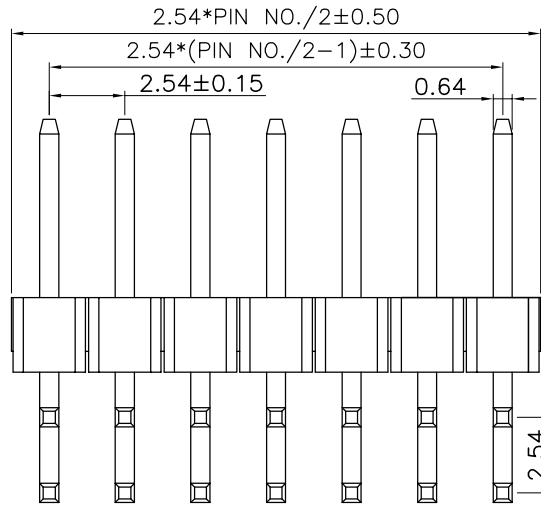


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

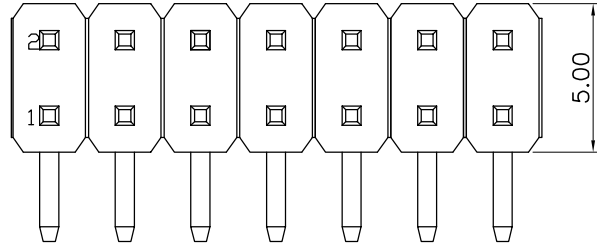

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE: ±0.05

NOTE:

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: PA6T, UL94V-0
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS: GOLD FLASH OVER NICKEL
3. ELECTRICAL PERFORMANCE:
 - 3-1. CURRENT RATING: 3A
 - 3-2. CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3. INSULATION RESISTANCE: 1000MΩ Min
 - 3-4. DIELECTRIC WITHSTANDING: 500V
4. ENVIRONMENTAL PERFORMANCE:
 - 4-1. OPERATING TEMPERATURE: -40°C ~ +105°C.
5. PACKAGE SPEC: PE BAG
6. P/N:

PH2541 25 M 9-2 XX 1 X X X 01

SERIES NO: _____

HEIGHT: _____
25: 2.5mm

MALE FEMALE: _____
M-MALE

ANGLE: _____
9-90°

ROW NO: _____
2-DOUBLE ROW

PIN Q'PY: _____
02~80

HOUSING:
1-PBT HF
2-PA6T HF

COLOR:
A-BLACK

PLATING:
A-ALL AU G/F

TERMIPOINT:
1-DIP

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.11.17		SIZE: A4	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	PH254125M9-2XX1XXX01	
			0.00±0.25		X'±3°	DESIGNER	Han_Gao	21.11.17	TITLE:		
			0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17	2.54双排针H2.5W5.0 90度 PC3.0 2XNP			REV: A0 SHEET: 1/1