
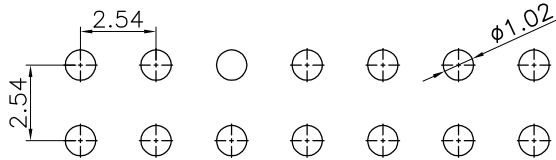
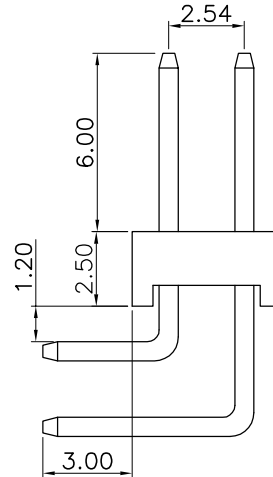
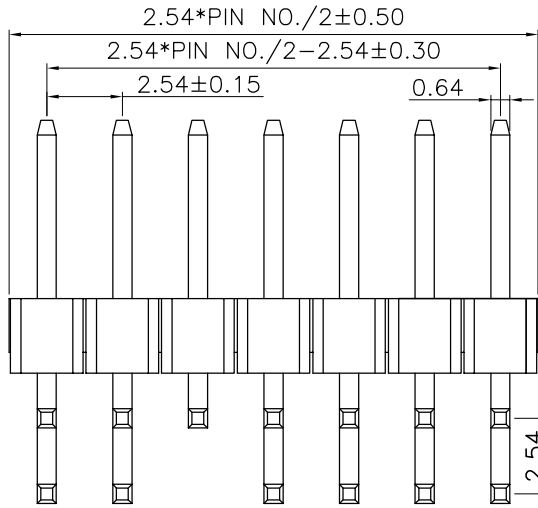


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

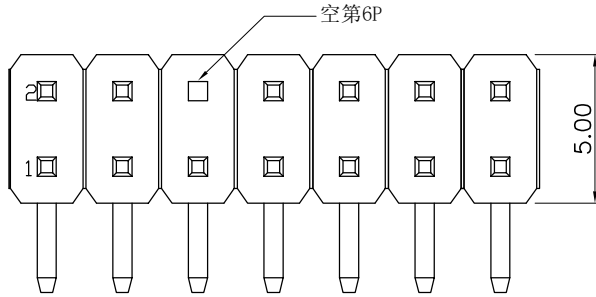

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA6T,UL94V-0
 - CONTACTS: BRASS
 - PLATING SPECIFICATION:
 - CONTACTS: GOLD FLASH OVER NICKEL
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 3A
 - CONTACT RESISTANCE: 30 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 500V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - PACKAGE SPEC: PE BAG
 - P/N:

SERIES NO: PH2541 25 M 9-2 XX 1 X X X 02
 HOUSING: 1-PA6T
 HEIGHT: 25: 2.5mm
 MALE FEMALE: M-MALE
 COLOR: A-BLACK
 ANGLE: 9-90°
 PLATING: A-ALL AU G/F
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 02~80
 TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH254125M9-2XX1XXX02	DWG.NO: ENDE05		
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	21.11.17	TITLE: 2.54双排针H2.5W5.0 90度 PC3.0 2X7P 空第6P	REV: A0		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17				