
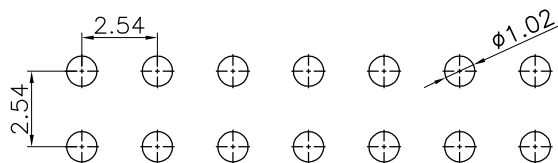
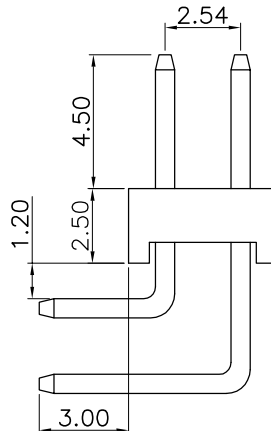
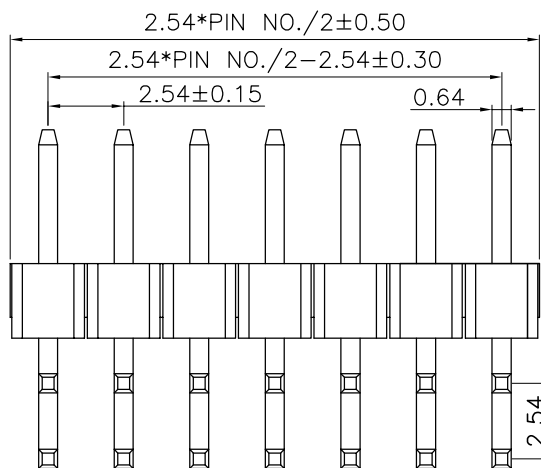


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

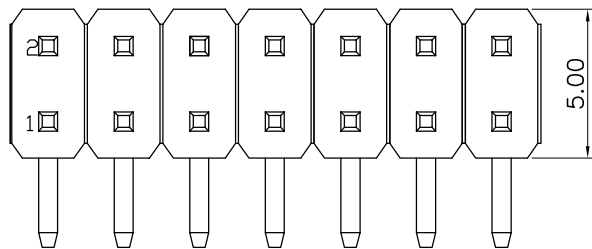

RECOMMENDED P. C. B LAYOUT  
P. C. B TOLERANCE: ±0.05

NOTE:

1. MATERIAL SPECIFICATION:
  - 1-1. HOUSING: PA6T, UL94V-0
  - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
  - 2-1. CONTACTS: GOLD FLASH OVER NICKEL
3. ELECTRICAL PERFORMANCE:
  - 3-1. CURRENT RATING: 3A
  - 3-2. CONTACT RESISTANCE: 30 mΩ MAX
  - 3-3. INSULATION RESISTANCE: 1000MΩ Min
  - 3-4. DIELECTRIC WITHSTANDING : 500V
4. ENVIRONMENTAL PERFORMANCE:
  - 4-1. OPERATING TEMPERATURE: -40°C ~ +105°C.
5. PACKAGE SPEC: PE BAG
6. P/N:

PH2541 25 M 9-2 XX 1 X X X 03

SERIES NO: \_\_\_\_\_

HEIGHT: \_\_\_\_\_

25: 2.5mm

MALE FEMALE: \_\_\_\_\_

M- MALE

ANGLE: \_\_\_\_\_

9-90°

ROW NO: \_\_\_\_\_

2-DOUBLE ROW

PIN Q'PY: \_\_\_\_\_

01~40

HOUSING: \_\_\_\_\_

1-PA6T

2-PA6T+HF

COLOR: \_\_\_\_\_

A-BLACK

PLATING: \_\_\_\_\_

A-ALL AU G/F

TERMIPPOINT: \_\_\_\_\_

1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH254125M9-2XX1XXX03	DWG.NO: ENDE05		
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.11.17	TITLE: 2.54双排针H2.5W5.0 90度 PC3.0 2XNP	REV: A0		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.11.17				