
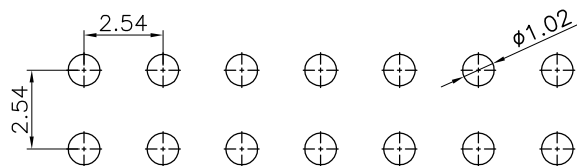
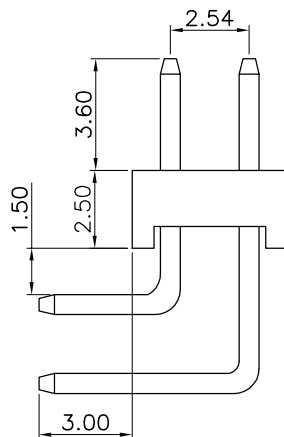
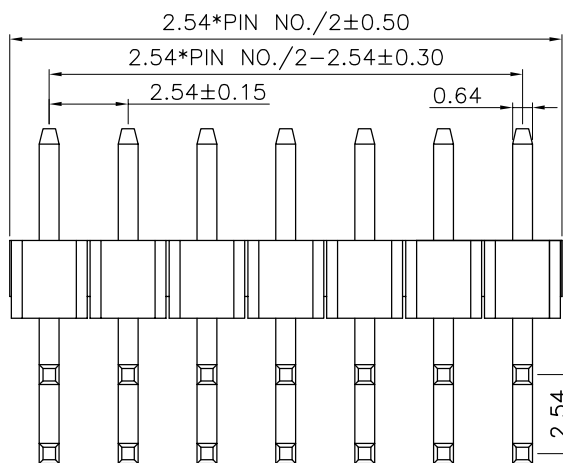


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

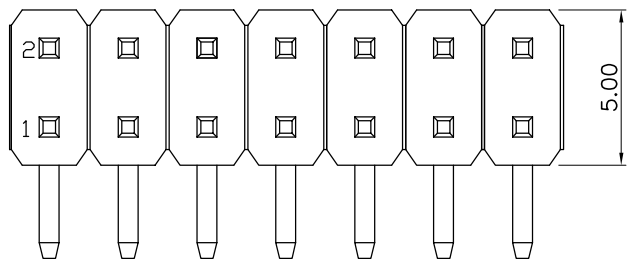

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ± 0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 9-2 XX 1 X X X 04

SERIES NO: _____ HOUSING: 1-PA6T

HEIGHT: _____ 25: 2.5mm

MALE FEMALE: _____ COLOR: A-BLACK

M-MALE

ANGLE: _____ PLATING: A-ALL AU G/F

9-90°

ROW NO: _____

2-DOUBLE ROW

PIN Q'PY: _____ TERMIPOINT: 1-DIP

02~80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1					
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.11.17	TITLE: 2.54双排针H2.5W5.0 90度 PC3.0 2XNP		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.11.17			