
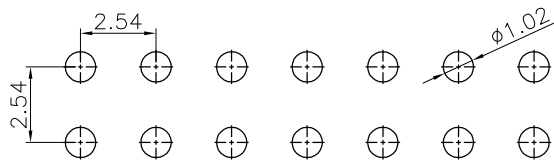
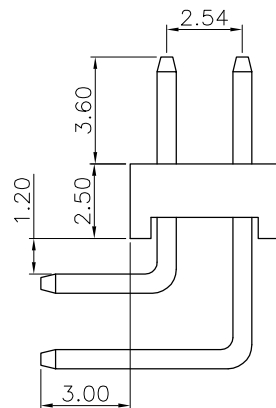
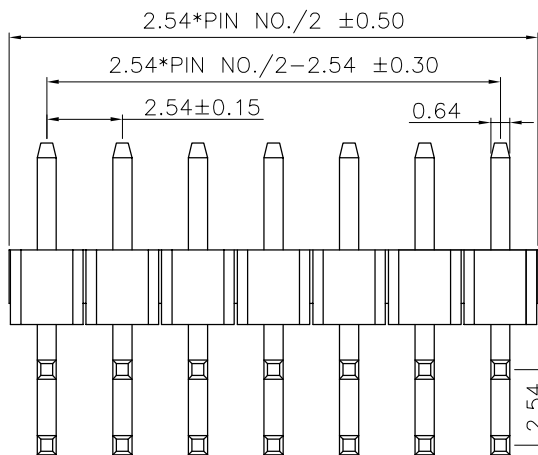


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

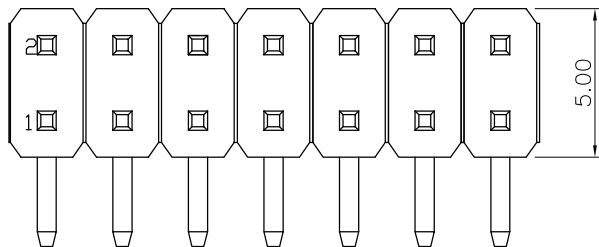

RECOMMENDED P. C. B LAYOUT  
P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:  
1-1.HOUSING: PA6T,UL94V-0  
1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:  
2-1.CONTACTS:  
GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:  
3-1.CURRENT RATING: 3A  
3-2.CONTACT RESISTANCE: 30 mΩ MAX  
3-3.INSULATION RESISTANCE: 1000MΩ Min  
3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:  
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 9-2 XX 1 X X X 05  
SERIES NO: PH2541 25 M 9-2 XX 1 X X X 05  
HEIGHT: 25: 2.5mm  
MALE FEMALE: M-MALE  
ANGLE: 9-90°  
ROW NO: 2-DOUBLE ROW  
PIN Q'PY: 02~80  
HOUSING: 1-PA6T  
COLOR: A-BLACK  
PLATING: A-ALL AU G/F  
TERMPIENT: 1-DIP

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.11.17		SIZE: A4	LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	PH254125M9-2XX1XXX05	
			0.00±0.25		X'±3'	DESIGNER	Han_Gao	21.11.17	TITLE:		
				0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.11.17	2.54双排针H2.5W5.0 90度 PA3.6 PC3.0 2XNP		REV: A0 SHEET: 1/1