


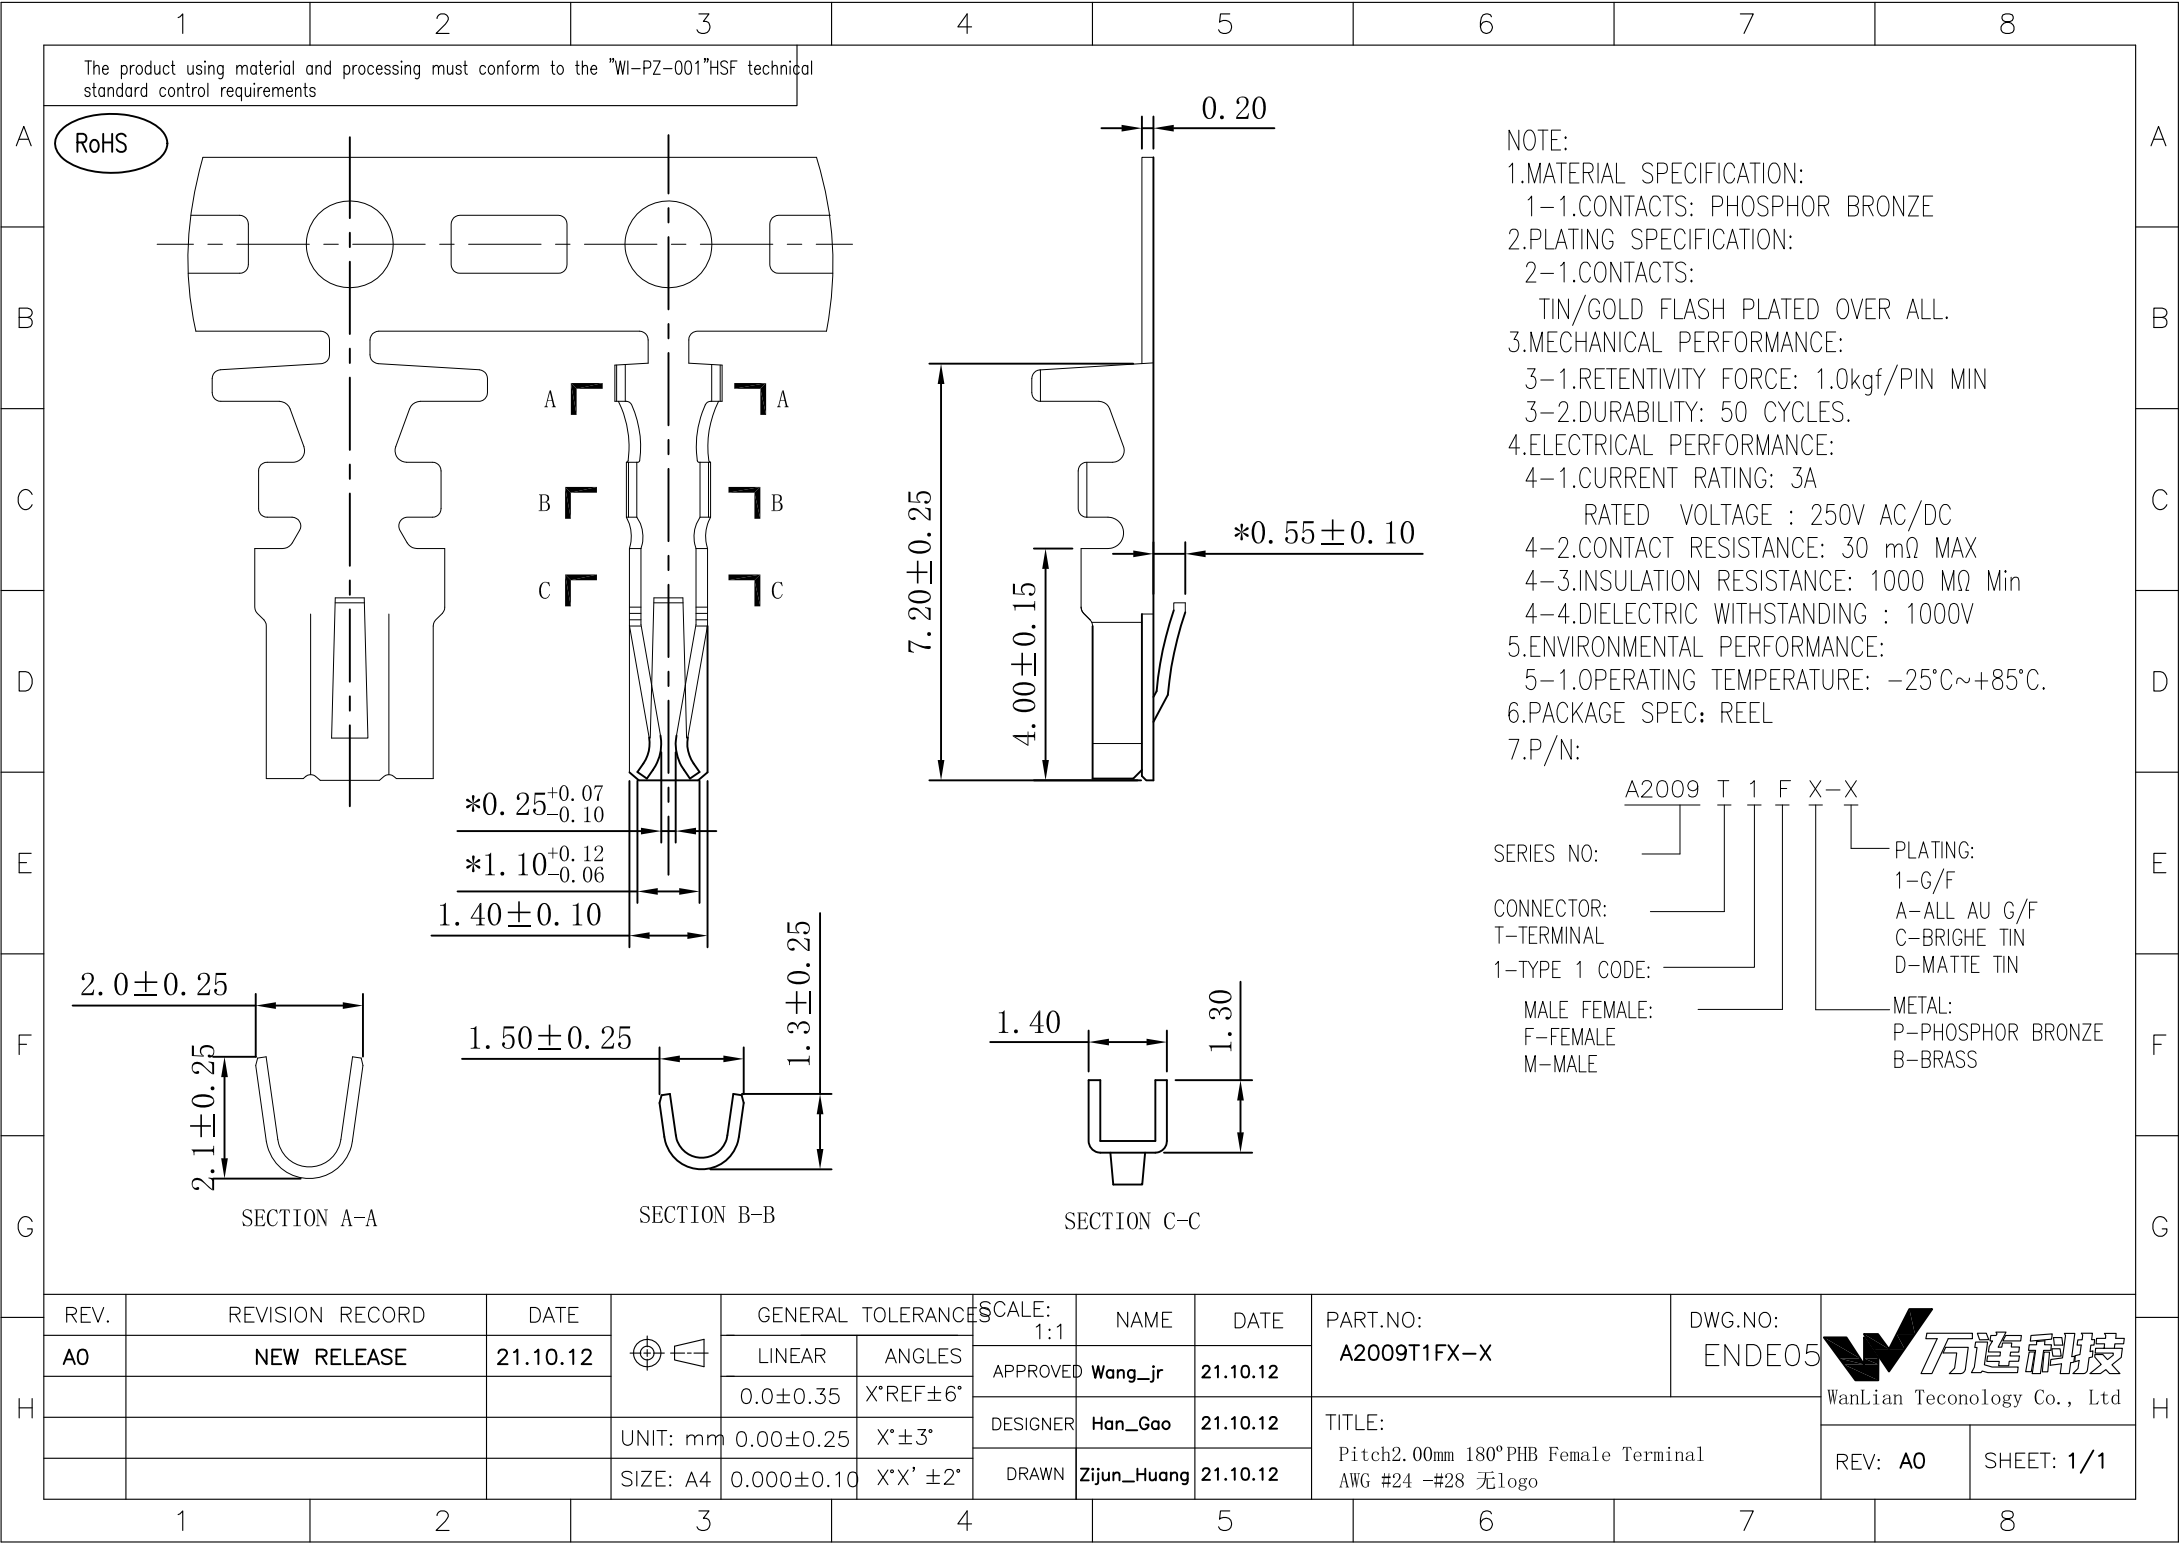

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

- NOTE:
- 1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
 - 2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0kgf/PIN MIN
3-2.DURABILITY: 50 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 3A
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 30 mΩ MAX
4-3.INSULATION RESISTANCE: 1000 MΩ Min
4-4.DIELECTRIC WITHSTANDING : 1000V
 - 5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
 - 6.PACKAGE SPEC: REEL
 - 7.P/N:

SERIES NO: A2009 T 1 F X-X

CONNECTOR: T-TERMINAL

1-TYPE 1 CODE:

MALE FEMALE:
F-FEMALE
M-MALE

PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN

METAL:
P-PHOSPHOR BRONZE
B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCE		SCALE: 1:1	NAME	DATE	PART.NO: A2009T1FX-X	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd		
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12					
				0.0±0.35	X°REF±6°								
			UNIT: mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.10.12	TITLE: Pitch2.00mm 180°PHB Female Terminal AWG #24 -#28 无logo			REV: A0	SHEET: 1/1
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang					