


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

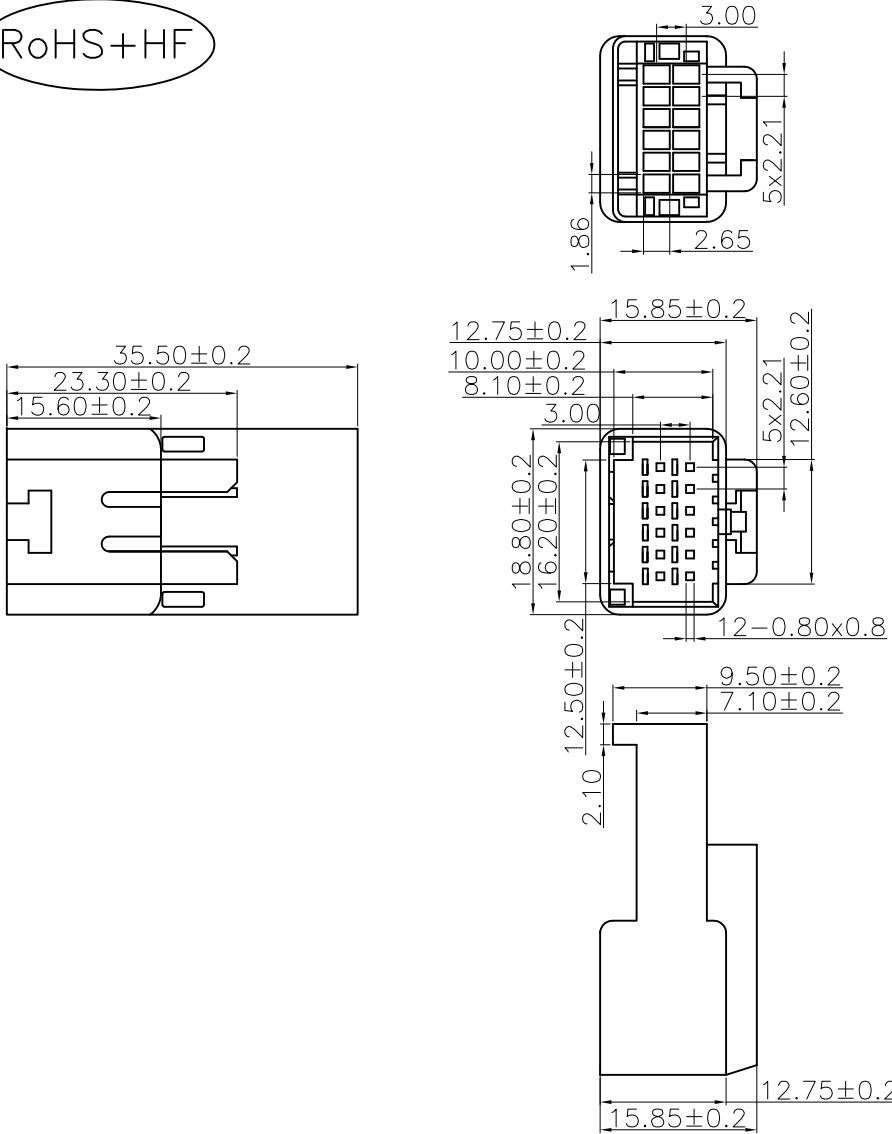

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:PA66,UL94V-0
2.MECHANICAL PERFORMANCE:
2-1.INSERTION FORCE: 1KGF/PIN MAX
2-2.REMOVAL FORCE: 3KGF/PIN MIN
2-3.DURABILITY: 25 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1. RATED CURRENT : 10A
RATED VOLTAGE : 250V
3-2.INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 30mΩ MAX
3-3.WITHSTANDING VOLTAGE:1500V AC
4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+90°C.
5.PACKAGE SPEC:PE BAG
6.P/N:
A2201 H F-2 12 X 0
SERIES NO: H F-2 12 X 0
COLOR:
A-BLACK
K-WHITE
S-NATURE
CONNECTOR: H F-2 12 X 0
H-HOUSING
F-FEMALE
PIN Q'PY:
02~40
ROW NO:
2-DOUBLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2201HF-212X0	DWG.NO: ENDE05	 WanLian Teconology Co., Ltd	
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	Wang_jr	21.01.13				
				0.0±0.35	X°REF±6°	DESIGNER	Han_Gao	21.01.13	TITLE: PITCH 2.20mm 母胶壳			
			UNIT:mm	0.00±0.25	X°±3°							
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.01.13			REV: A0	SHEET: 1/1