The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

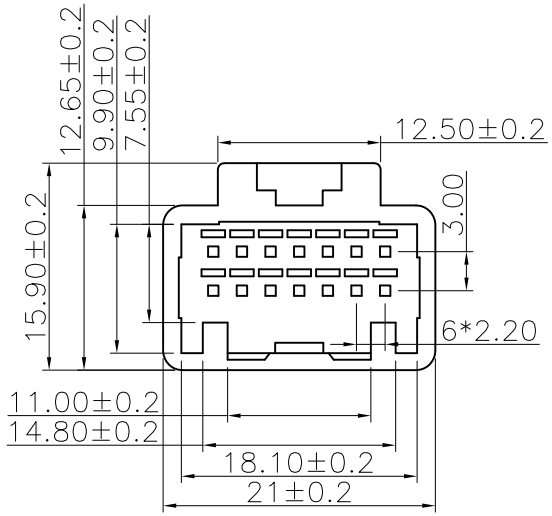

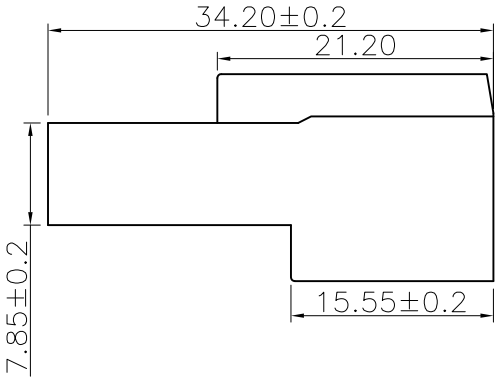



NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING:PA66,UL94V-0
2.MECHANICAL PERFORMANCE:
2-1.INSERTION FORCE: 1KGF/PIN MAX
2-2.REMOVAL FORCE: 3KGF/PIN MIN
2-3.DURABILITY: 25 CYCLES.
3.ELECTRICAL PERFORMANCE:
3-1. RATED CURRENT : 10A
RATED VOLTAGE : 250V
3-2.INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 30mΩ MAX
3-3.WITHSTANDING VOLTAGE:1500V AC
4.ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+90°C.
5.PACKAGE SPEC:PE BAG
6.P/N:

A2201 H F-2 14 X 0

- A2201: SERIES NO:
- H: CONNECTOR: H-HOUSING
- F: MALE FEMALE: F-FEMALE
- 2: ROW NO: 2-DOUBLE ROW
- 14: PIN Q'PY: 02~40
- X: COLOR: A-BLACK, K-WHITE, S-NATURE
- 0

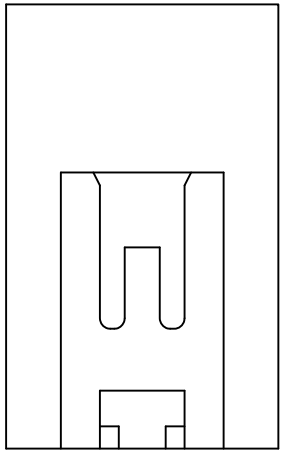

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	21.01.13

UNIT: mm
SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED	Wang_jr	21.01.13
DESIGNER	Han_Gao	21.01.13
DRAWN	Zijun_Huang	21.01.13

PART.NO: A2201HF-214X0

DWG.NO: ENDE05

TITLE: PITCH 2.20mm 母胶壳

万连科技 WanLian Teconology Co., Ltd

REV: A0

SHEET: 1/1