




The product using material and processing must conform to the "WL-PZ-001"HSF technical standard requirements


RoHS

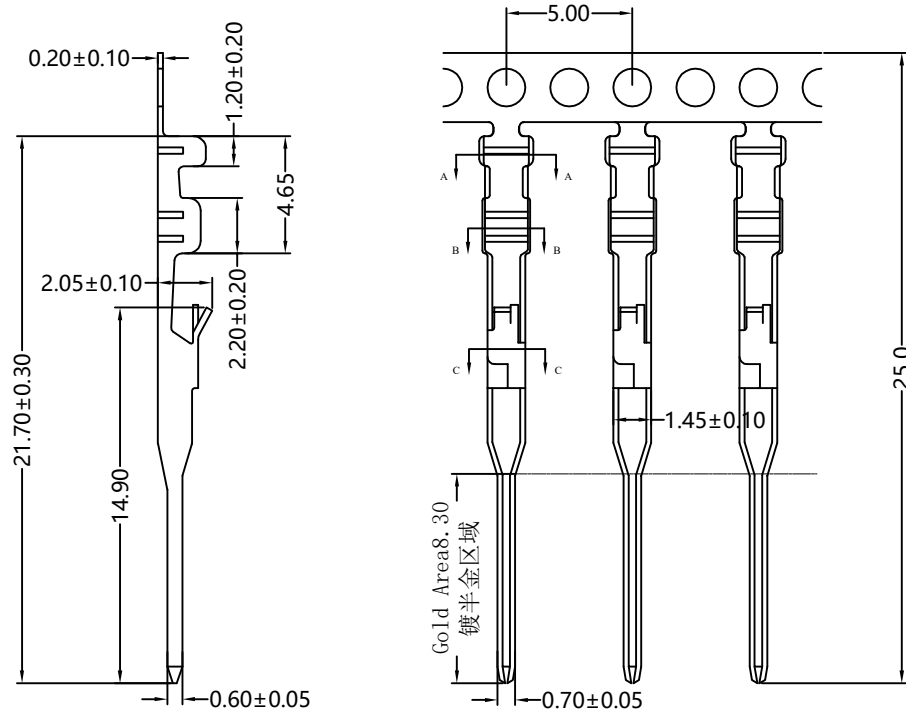

SEC:A-A



SEC:B-B




SEC:C-C

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.CONTACTS: PHOSPHOR BRONZE
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.MECHANICAL PERFORMANCE:
 3-1.RETENTIVITY FORCE: 1.5KGF/pin min
 3-2.DURABILITY: 50 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1.CURRENT RATING: 3A AC/DC
 RATED VOLTAGE : 250V AC/DC
 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 4-3.INSULATION RESISTANCE: 100MΩ Min
 4-4.DIELECTRIC WITHSTANDING : 1500V
 5.ENVIRONMENTAL PERFORMANCE:
 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
 6.PACKAGE SPEC: REEL
 7.P/N:

SERIES NO: A2547 T M X-X
 CONNECTOR: T-TERMINAL
 MALE FEMALE: F-FEMALE M-MALE
 PLATING:
 1-G/F
 A-ALL AU G/F
 C-BRIGHE TIN
 D-MATTE TIN
 METAL:
 P-PHOSPHOR BRONZE
 B-BRASS

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2547TMP-C	AWG#22-#24	1.63mm(max)	Phosphor Bronze	Tin Plated	15,000pcs
A2547TMP-1	AWG#22-#24	1.63mm(max)	Phosphor Bronze	Contact Gold Flash Bottom Nickel	15,000pcs

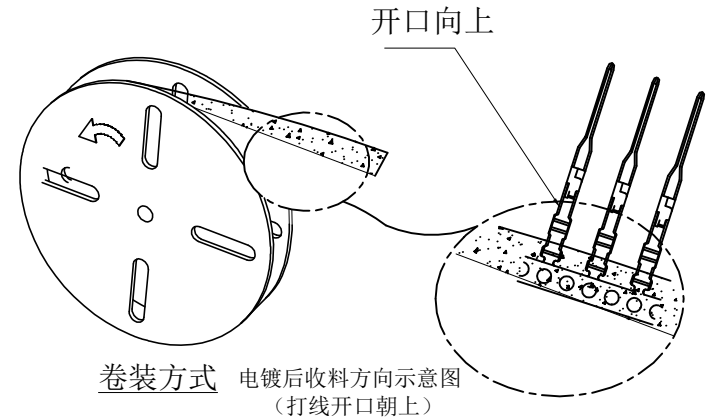

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	A2547TMX-X	ENDE05	
			0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.11.17	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.11.17	Pitch 2.54mm MX单排公端子 AWG#22-#24		