


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements


RoHS

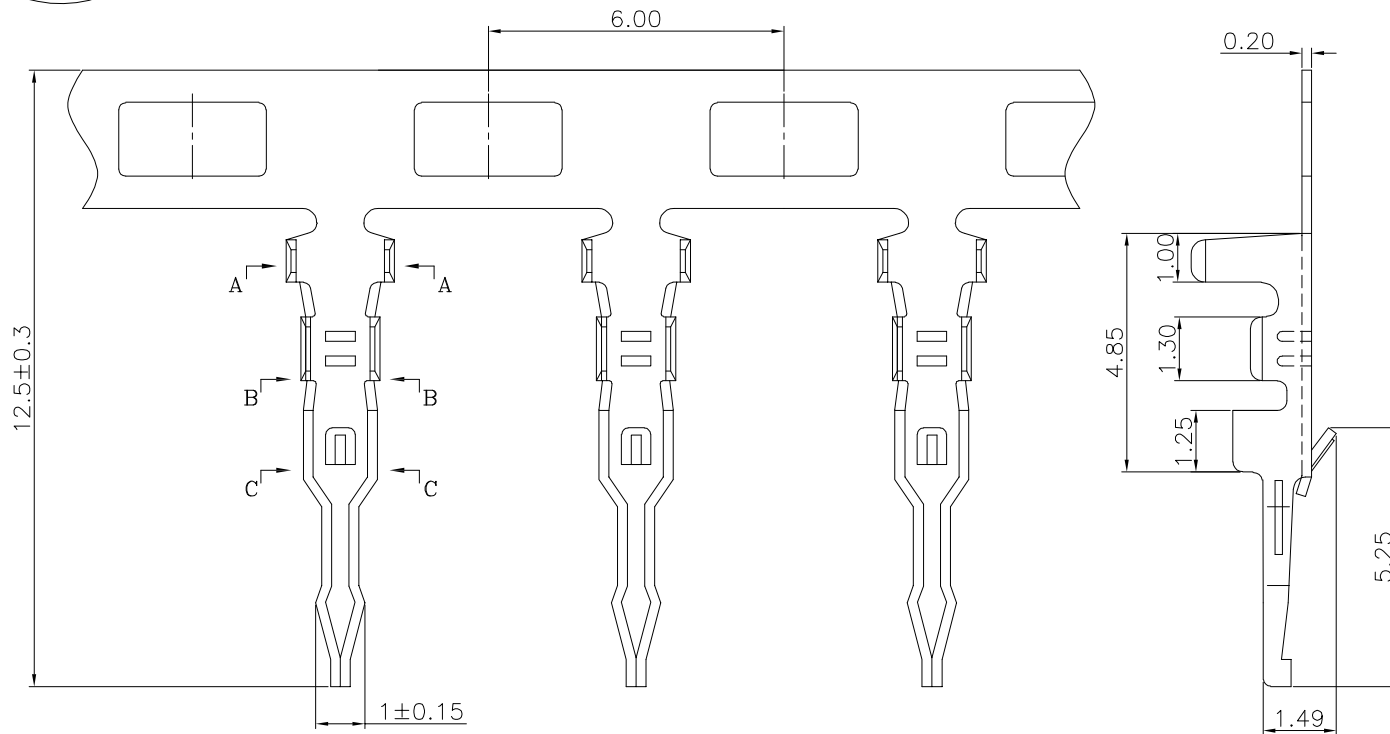


NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.TERMINAL: PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
  - 2-1.TERMINAL: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
  - 3-1.RETENTIVITY FORCE: 1.0KGF/Pin Min
  - 3-2.DURABILITY: 25 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
  - 4-1.CURRENT RATING: 2A AC/DC
  - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
  - 4-3.INSULATION RESISTANCE: 1000MΩ Min
  - 4-4.DIELECTRIC WITHSTANDING : 800V
- 5.ENVIRONMENTAL PERFORMANCE:
  - 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 6.PACKAGE SPEC : REEL
- 7.P/N:


SERIES NO: B2001 T F 0 X-X  
 CONNECTOR: T-TERMINAL  
 MALE FEMALE: F-FEMALE  
 ANGLE: 0-180°  
 PLATING:  
 A-ALL AU G/F  
 C-BRIGHT TIN  
 D-MATTE TIN  
 METAL:  
 P-PHOSPHOR BRONZE  
 B-BRASS




SECTION:A-A




SECTION:B-B



SECTION:C-C

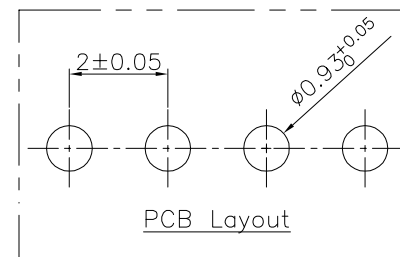

PCB Layout

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28	 LINEAR 0.0±0.35 UNIT:mm SIZE: A4	ANGLES X'REF±6° X'±3° X'X' ±2°	1:1	Wang_jr	22.10.28	B2001TFOX-X	ENDE05	
					0.00±0.25		APPROVED	Han_Gao	22.10.28	TITLE:
					DESIGNER	LanXuan_Hou	22.10.28	Pitch 2.0mm 180° 立插式基板端子AWG#24~#28 (板孔0.90mm)		REV: A0 SHEET: 1/1