

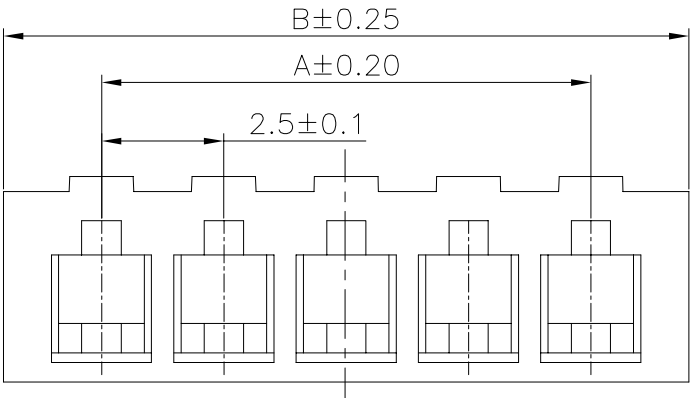
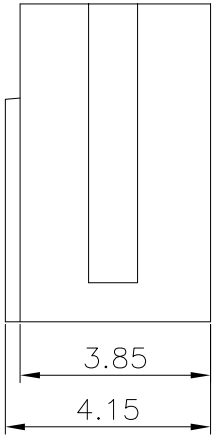


1	2	3	4	5	6	7	8																																																												
The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																																			
RoHS																																																																			
3D VIEW 1:2																																																																			
				<p>NOTE:</p> <p>1.MATERIAL SPECIFICATION: 1-1.HOUSING: PA66,UL94V-0</p> <p>2.ELECTRICAL PERFORMANCE: 2-1.CURRENT RATING: 3A RATED VOLTAGE : 125V 2-2.CONTACT RESISTANCE: 10 mΩ MAX 2-3.INSULATION RESISTANCE: 1000MΩ Min 2-4.DIELECTRIC WITHSTANDING : 1000V AC</p> <p>3.ENVIRONMENTAL PERFORMANCE: 3-1.OPERATING TEMPERATURE: -40°C~+105°C.</p> <p>4.PACKAGE SPEC: PE BAG</p> <p>5.P/N:</p> <div><div>B25121</div><div>H</div><div>F</div><div>0-1</div><div>XX</div><div>X</div><div>X</div><div>SERIES NO:</div><div>CONNECTOR:</div><div>MALE FEMALE:</div><div>ANGLE:</div><div>WATER CODE</div><div>COLOR:</div><div>PIN Q'PY:</div><div>ROW NO:</div><div>H-HOUSING</div><div>0-N/A</div><div>M-BEIGE</div><div>02~16</div><div>1-SINGLE ROW</div></div>																																																															
				<table><tr><th>Circuit</th><th colspan="2">Dimensions(mm)</th><th>Circuit</th><th colspan="2">Dimensions(mm)</th></tr><tr><td></td><th>A</th><th>B</th><td></td><th>A</th><th>B</th></tr><tr><td>02</td><td>2.50</td><td>6.50</td><td>10</td><td>22.50</td><td>26.50</td></tr><tr><td>03</td><td>5.00</td><td>9.00</td><td>11</td><td>25.00</td><td>29.00</td></tr><tr><td>04</td><td>7.50</td><td>11.50</td><td>12</td><td>27.50</td><td>31.50</td></tr><tr><td>05</td><td>10.00</td><td>14.00</td><td>13</td><td>30.00</td><td>34.00</td></tr><tr><td>06</td><td>12.50</td><td>16.50</td><td>14</td><td>32.50</td><td>36.50</td></tr><tr><td>07</td><td>15.00</td><td>19.00</td><td>15</td><td>35.00</td><td>39.00</td></tr><tr><td>08</td><td>17.50</td><td>21.50</td><td>16</td><td>37.50</td><td>41.50</td></tr><tr><td>09</td><td>20.00</td><td>24.00</td><td></td><td></td><td></td></tr></table>				Circuit	Dimensions(mm)		Circuit	Dimensions(mm)			A	B		A	B	02	2.50	6.50	10	22.50	26.50	03	5.00	9.00	11	25.00	29.00	04	7.50	11.50	12	27.50	31.50	05	10.00	14.00	13	30.00	34.00	06	12.50	16.50	14	32.50	36.50	07	15.00	19.00	15	35.00	39.00	08	17.50	21.50	16	37.50	41.50	09	20.00	24.00			
Circuit	Dimensions(mm)		Circuit	Dimensions(mm)																																																															
	A	B		A	B																																																														
02	2.50	6.50	10	22.50	26.50																																																														
03	5.00	9.00	11	25.00	29.00																																																														
04	7.50	11.50	12	27.50	31.50																																																														
05	10.00	14.00	13	30.00	34.00																																																														
06	12.50	16.50	14	32.50	36.50																																																														
07	15.00	19.00	15	35.00	39.00																																																														
08	17.50	21.50	16	37.50	41.50																																																														
09	20.00	24.00																																																																	
<table><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">PART.NO: B25121HF0-1XXXX</td><td rowspan="4">DWG.NO: ENDE05</td><td rowspan="4"></td></tr><tr><td>A0</td><td>NEW RELEASE</td><td>22.10.28</td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td>Wang_jr</td><td>22.10.28</td></tr><tr><td></td><td></td><td></td><td>0.0±0.35</td><td>X°REF±6°</td><td>CHECK</td><td>XueZe_Ma</td><td>22.10.28</td></tr><tr><td></td><td></td><td></td><td>UNIT:mm</td><td>0.00±0.25</td><td>X°±3°</td><td>DRAWN</td><td>LanXuan_Hou</td><td>22.10.28</td></tr><tr><td></td><td></td><td></td><td>SIZE: A4</td><td>0.000±0.10</td><td>X°X' ±2°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>				REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: B25121HF0-1XXXX	DWG.NO: ENDE05		A0	NEW RELEASE	22.10.28	LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28				0.0±0.35	X°REF±6°	CHECK	XueZe_Ma	22.10.28				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28				SIZE: A4	0.000±0.10	X°X' ±2°																					
REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1		NAME	DATE	PART.NO: B25121HF0-1XXXX	DWG.NO: ENDE05																																																								
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED		Wang_jr	22.10.28																																																										
				0.0±0.35	X°REF±6°	CHECK		XueZe_Ma	22.10.28																																																										
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.10.28																																																										
			SIZE: A4	0.000±0.10	X°X' ±2°																																																														
1	2	3	4	5	6	7	8																																																												

RoHS

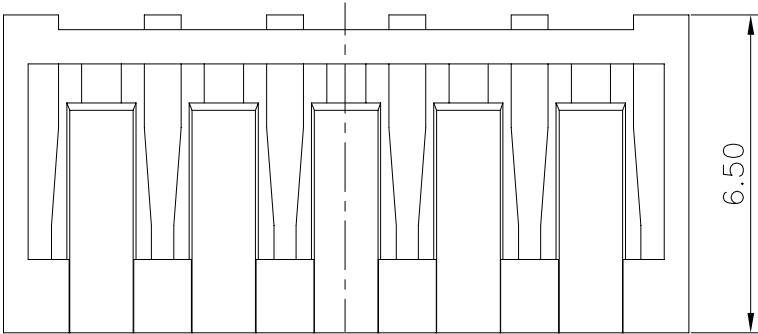

3D VIEW  
1:2

NOTE:

1.MATERIAL SPECIFICATION:  
1-1.HOUSING: PA66,UL94V-0

2.ELECTRICAL PERFORMANCE:  
2-1.CURRENT RATING: 3A  
RATED VOLTAGE : 125V  
2-2.CONTACT RESISTANCE: 10 mΩ MAX  
2-3.INSULATION RESISTANCE: 1000MΩ Min  
2-4.DIELECTRIC WITHSTANDING : 1000V AC

3.ENVIRONMENTAL PERFORMANCE:  
3-1.OPERATING TEMPERATURE: -40°C~+105°C.

4.PACKAGE SPEC: PE BAG

5.P/N:

B25121

H

F

0-1

XX

X

X

SERIES NO:

CONNECTOR:

MALE FEMALE:

ANGLE:

WATER CODE

COLOR:

PIN Q'PY:

ROW NO:

H-HOUSING


0-N/A

M-BEIGE

02~16

1-SINGLE ROW

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	2.50	6.50	10	22.50	26.50
03	5.00	9.00	11	25.00	29.00
04	7.50	11.50	12	27.50	31.50
05	10.00	14.00	13	30.00	34.00
06	12.50	16.50	14	32.50	36.50
07	15.00	19.00	15	35.00	39.00
08	17.50	21.50	16	37.50	41.50
09	20.00	24.00			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: B25121HF0-1XXXX	DWG.NO: ENDE05
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28		
				0.0±0.35	X°REF±6°				CHECK	XueZe_Ma
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou		
				SIZE: A4	0.000±0.10	X°X' ±2°			TITLE: Pitch 2.50mm 180°SCN HOUSING	

WanLian Technology Co., Ltd

REV: A0

SHEET: 1/1