

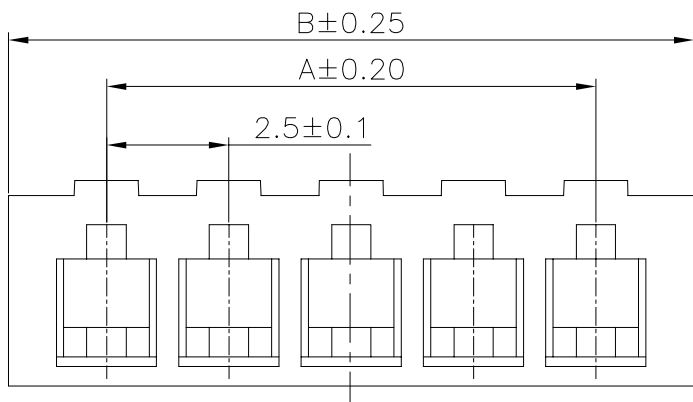
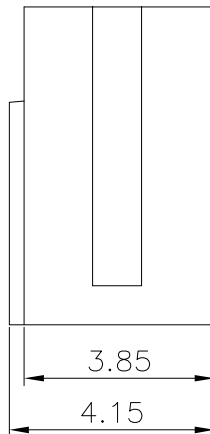


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

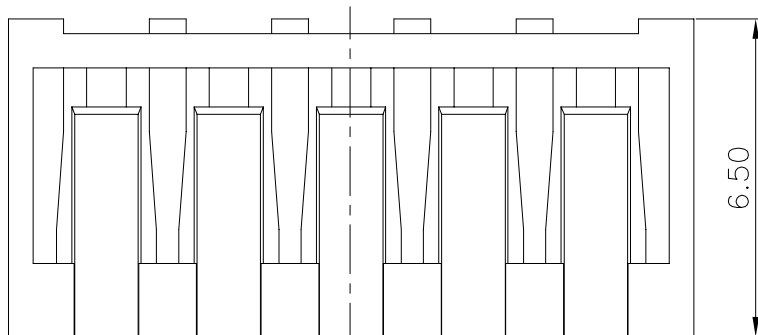

3D VIEW

1:2

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: PA66,UL94V-0
- 2.ELECTRICAL PERFORMANCE:
  - 2-1.CURRENT RATING: 3A  
RATED VOLTAGE : 125V
  - 2-2.CONTACT RESISTANCE: 10 mΩ MAX
  - 2-3.INSULATION RESISTANCE: 1000MΩ Min
  - 2-4.DIELECTRIC WITHSTANDING : 1000V AC
- 3.ENVIRONMENTAL PERFORMANCE:
  - 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 4.PACKAGE SPEC: PE BAG
- 5.P/N:

SERIES NO: B2512 H F 0-1 XX X X

CONNECTOR: H-HOUSING

MALE FEMALE: F-FEMALE

ANGLE: 0-180°

WATER CODE: 0-N/A

COLOR: K-WHITE

PIN Q'PY: 02~16

ROW NO: 1-SINGLE ROW

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	2.50	6.50	10	22.50	26.50
03	5.00	9.00	11	25.00	29.00
04	7.50	11.50	12	27.50	31.50
05	10.00	14.00	13	30.00	34.00
06	12.50	16.50	14	32.50	36.50
07	15.00	19.00	15	35.00	39.00
08	17.50	21.50	16	37.50	41.50
09	20.00	24.00			

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	1:1	Wang_jr	22.10.28		
			0.00±0.25	X'±3'	APPROVED	XueZe_Ma	22.10.28	TITLE:	Pitch 2.50mm 180°SCN HOUSING	
			0.000±0.10	X'X' ±2'	CHECK	LanXuan_Hou	22.10.28			
			SIZE: A4		DRAWN				REV: A0	SHEET: 1/1

