



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


RoHS

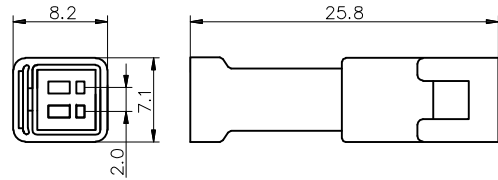


C2004HF-102K0

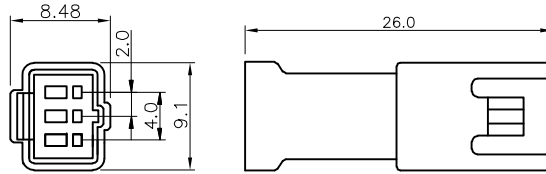


C2004HF-103K0

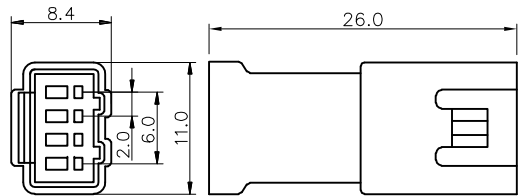

C2004HF-104K0

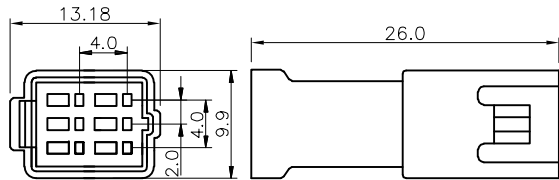

C2004HF-206K0

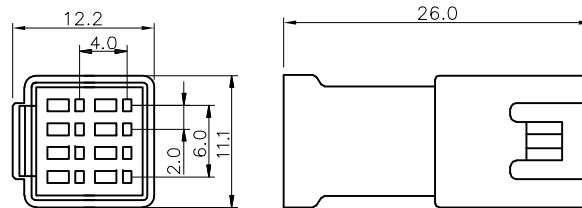

C2004HF-208K0

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PBT,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.RETENTIVITY FORCE: 1.2kgf/pin min
 - 2-2.DURABILITY: 30 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A AC/DC
RATED VOLTAGE : 100V AC/DC
 - 3-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1000V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG

6.P/N: C2004 H F-1 XX X 0

SERIES NO: [Connector Type] [Housing] [Female/Male] [Pin Qty] [Row] [Color]

CONNECTOR: H-HOUSING

MALE FEMALE: F-FEMALE

COLOR: A-BLACK, K-WHITE, S-NATURE

PIN Q'PY: 02~08

ROW NO: 1-SINGLE ROW, 2-DOUBLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.11.17	C2004HF-1XXX0 C2004HF-2XXX0		ENDE05
			UNIT: mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch2.00mm JWPF线对线防水IP67 Female Housing		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Zijun_Huang	21.11.17				