
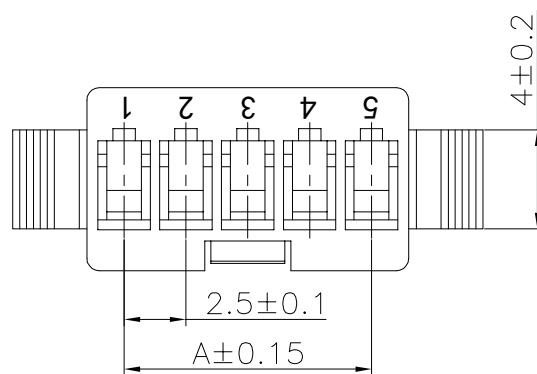
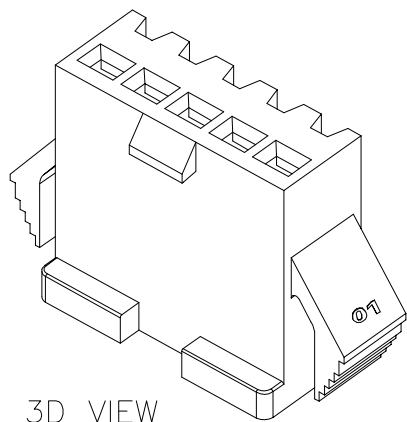
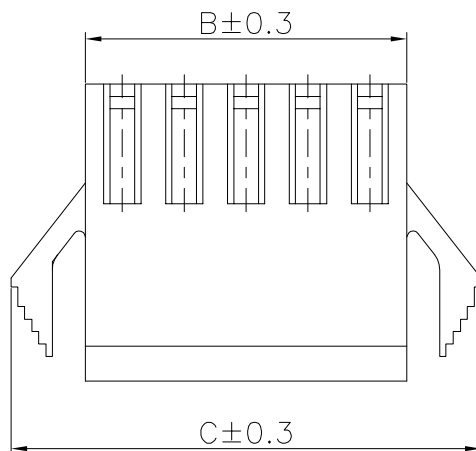


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

ROHS+HF

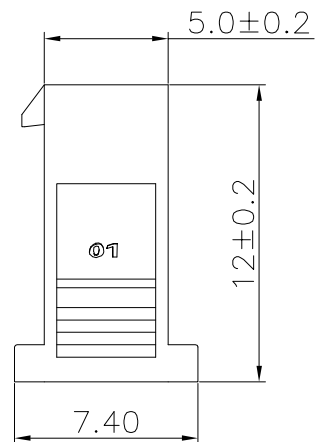

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.RETENTIVITY FORCE: 2.0KGF/pin min
 - 2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3.0A
 - RATED VOLTAGE : 250V AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 500MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1500V AC
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.P/N:

SERIES NO: C2521 H 1 M-1 XX X 0
 CONNECTOR: H-HOUSING
 TYPE CODE: M-1
 MALE FEMALE: M-MALE


COLOR:
 A-BLACK
 K-WHITE
 S-NATURE

PIN Q'PY:
 02~12

ROW NO:
 1-SINGLE ROW

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
02	2.50	5.50	11.50	08	17.50	20.50	26.50
03	5.00	8.00	14.00	09	20.00	23.00	29.00
04	7.50	10.50	16.50	10	22.50	25.50	31.50
05	10.00	13.00	19.00	11	25.00	28.00	34.00
06	12.50	15.50	21.50	12	27.50	30.50	36.50
07	15.00	18.00	24.00				

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.01.13		SIZE: A4	LINEAR 0.00±0.25	ANGLES X'±3'	APPROVED	Wang_jr	21.01.13	C2521H1M-1XXX0	
				0.00±0.10	X'X' ±2'	DESIGNER	Han_Gao	21.01.13	TITLE: Pitch 2.5mm 180°SM 单排公胶壳带翅膀		REV: A0
						DRAWN	LongCan_Liu	21.01.13			SHEET: 1/1