
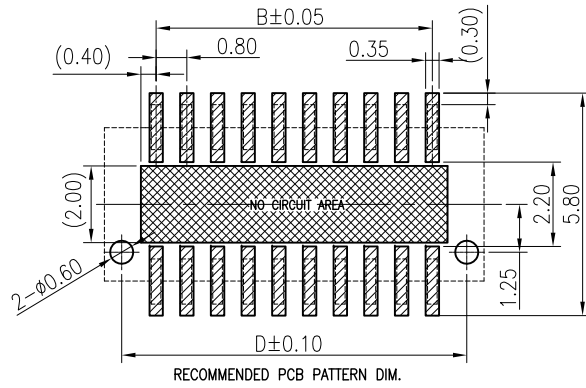
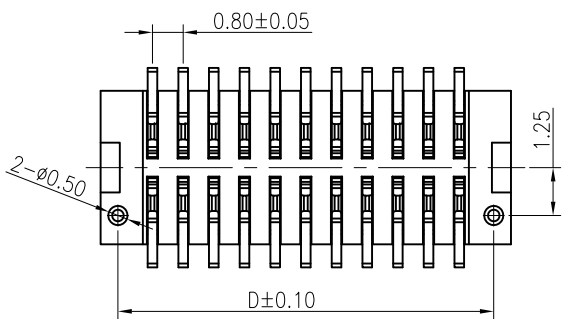


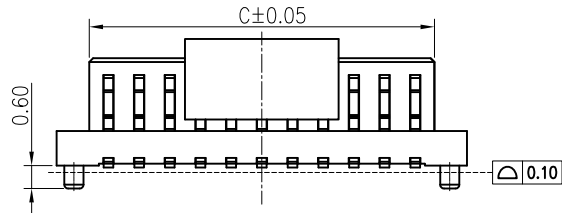
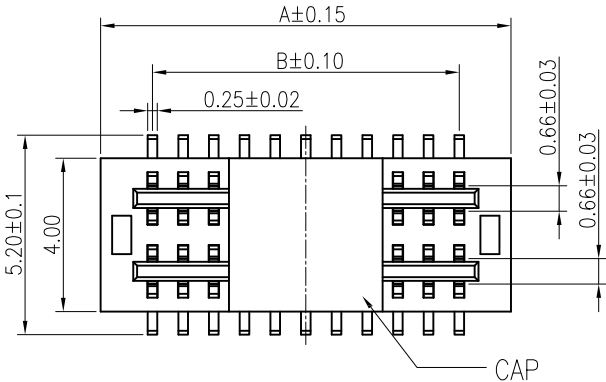


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

MATING HEIGHT	PLUG (H)	SOCKET (H)	NO.of contacts	Dimensions				NO.of contacts	Dimensions			
				A	B	C	D		A	B	C	D
4.0	1.0	3.0	04	3.50	0.80	1.80	2.60	54	23.50	20.80	21.80	22.60
4.5	1.0	3.5	06	4.30	1.60	2.60	3.40	56	24.30	21.60	22.60	23.40
5.0	1.0	4.0	08	5.10	2.40	3.40	4.20	58	25.10	22.40	23.40	24.20
5.5	1.0	4.5	10	5.90	3.20	4.20	5.00	60	25.90	23.20	24.20	25.00
6.0	2.0	4.0	12	6.70	4.00	5.00	5.80	62	26.70	24.00	25.00	25.80
6.5	2.0	4.5	14	7.50	4.80	5.80	6.60	64	27.50	24.80	25.80	26.60
			16	8.30	5.60	6.60	7.40	66	28.30	25.60	26.60	27.40
			18	9.10	6.40	7.40	8.20	68	29.10	26.40	27.40	28.20
			20	9.90	7.20	8.20	9.00	70	29.90	27.20	28.20	29.00
			22	10.70	8.00	9.00	9.80	72	30.70	28.00	29.00	29.80
			24	11.50	8.80	9.80	10.60	74	31.50	28.80	29.80	30.60
			26	12.30	9.60	10.60	11.40	76	32.30	29.60	30.60	31.40
			28	13.10	10.40	11.40	12.20	78	33.10	30.40	31.40	32.20
			30	13.90	11.20	12.20	13.00	80	33.90	31.20	32.20	33.00
			32	14.70	12.00	13.00	13.80	82	34.70	32.00	33.00	33.80
			34	15.50	12.80	13.80	14.60	84	35.50	32.80	33.80	34.60
			36	16.30	13.60	14.60	15.40	86	36.30	33.60	34.60	35.40
			38	17.10	14.40	15.40	16.20	88	37.10	34.40	35.40	36.20
			40	17.90	15.20	16.20	17.00	90	37.90	35.20	36.20	37.00
			42	18.70	16.00	17.00	17.80	92	38.70	36.00	37.00	37.80
			44	19.50	16.80	17.80	18.60	94	39.50	36.80	37.80	38.60
			46	20.30	17.60	18.60	19.40	96	40.30	37.60	38.60	39.40
			48	21.10	18.40	19.40	20.20	98	41.10	38.40	39.40	40.20
			50	21.90	19.20	20.20	21.00	100	41.90	39.20	40.20	41.00



TOLERANCE : ±0.05

Specifications:
 Rated Voltage : 60V AC
 Rated Current : 0.5A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 60mΩ(MAX.)
 Insulation Resistance : 800MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Base:PA9T UL 94V-0,COLOR:BLACK
 Pin Terminal: PHOSPHOR BRONZE/Gold flash
 OVERALL 50~100 μ "NICKEL UNDER PLATED.
 PACKAGE SPEC: REEL

P/N: B0801 XX M 0-2 XX 2 X X 01
 SERIES NO:
 PLUG HEIGHT:
 10-1.0H;
 20-2.0H;
 MALE FEMALE:
 M-MALE
 ANGLE:
 0-180°
 ROW NO:
 2-DOUBLE ROW
 PIN Q'PY:
 08~80pin
 COLOR:
 A-BLACK
 K-WHITE
 S-NATURE
 PLATING:
 A-ALL AU G/F
 C-BRIGHE TIN
 D-MATTE Tin
 TERMIPOINT:
 2-SMT


REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	Wang_jr	21.11.17	B0801XXM0-2XX2XX01	ENDE05	
			0.0±0.35	X°REF±6°	APPROVED	Han_Gao	21.11.17			
			0.00±0.25	X°±3°	DESIGNER	Zijun_Huang	21.11.17			
			0.000±0.10	X°X'±2°	DRAWN					
								TITLE:	0.8mm 双槽带柱SMT型BTB 公座	
								REV: A0	SHEET: 1/2	

WanLian Teconology Co., Ltd

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS+HF

Tape width 16 and 24 mm

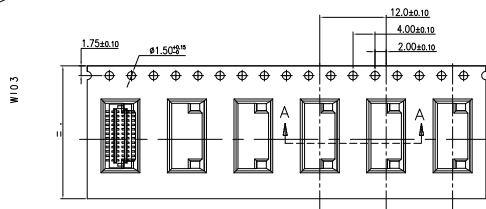

PULL OUT DIRECTION



Tape width 32 and 56 mm

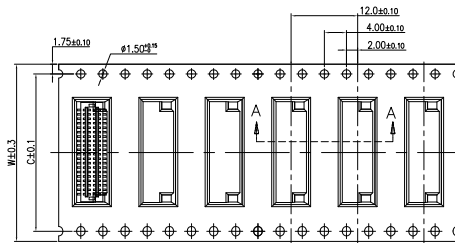

PULL OUT DIRECTION

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
- 2.Carrier camber is within 1mm in 100mm.
- 3.Material: black conductive polystyrene alloy.
- 4.Material Thickness: 0.3 ± 0.05 mm.
- 5.All dimensions meet EIA-481-B requirements.
- 6.5000pcs Pef Reel.
- 7.For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

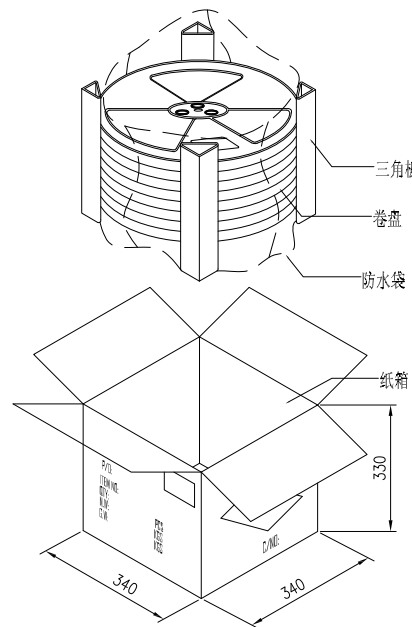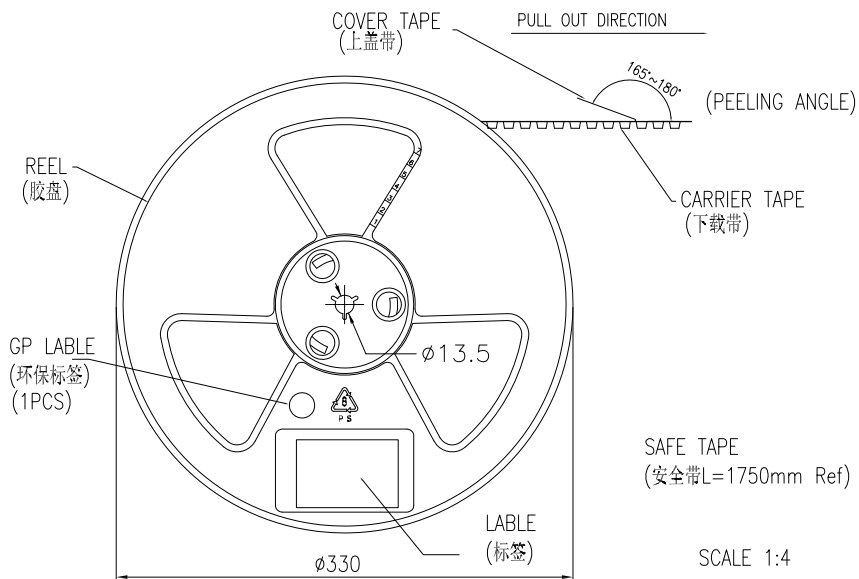

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~14PIN	16	-	1000	15	15000
16PIN~34PIN	24	-	1000	10	10000
36Pin ~44PIN	32	28.4	1000	8	8000
46Pin ~740PIN	44	40.4	1000	6	6000
76Pin ~100PIN	56	52.4	1000	5	5000

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART. NO:	DWG. NO:
A0	NEW RELEASE	21. 03. 10	LINEAR	ANGLES	1:1	Wang_jr	21. 03. 10	B0801XXM0-2XX2XX01 B0801XXF0-2XX2XX01	ENDE05
			0.0±0.35	X° REF±6°	APPROVED	Ding_bo	21. 03. 10	TITLE: 0.8mm 双槽带柱SMT型BTB 公座/母座包装图	REV: A0 SHEET: 2/2
			0.00±0.25	X° ±3°	DESIGNER	HXY	21. 03. 10		
			0.000±0.10	X° X'±2°	DRAWN				



WanLian Teconology Co., Ltd