
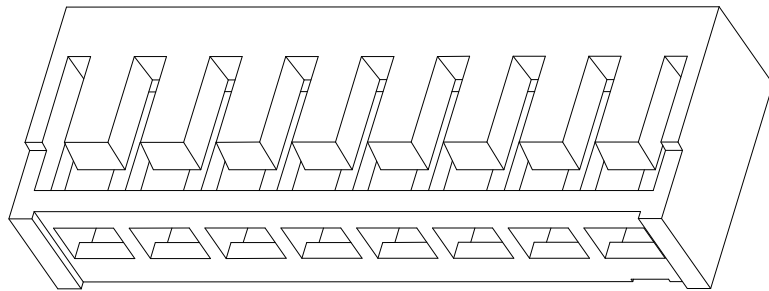
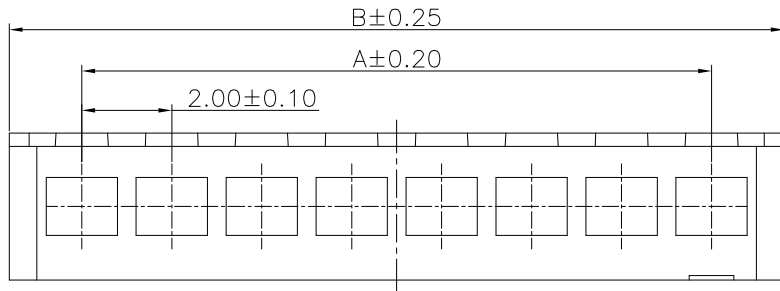
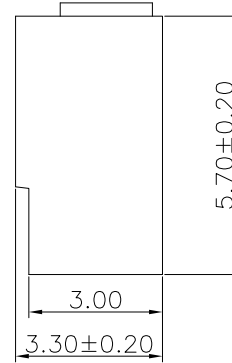


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF

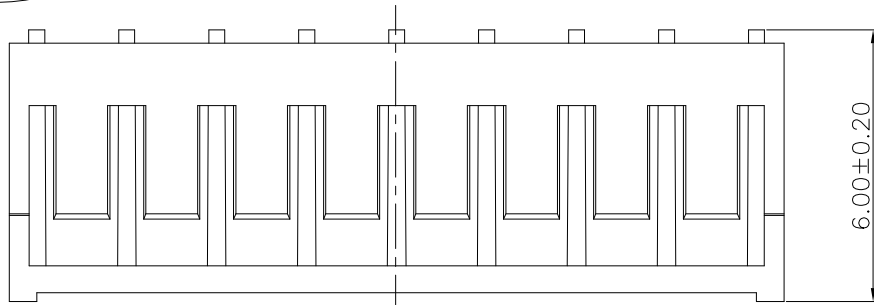

3D VIEW

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
  - 2-1.RETENTIVITY FORCE: 1.0KGF/Pin Min
  - 2-2.DURABILITY: 25 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 2A AC/DC  
RATED VOLTAGE : 250V AC/DC
  - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 800V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:
 

B2001	H	M	0-1	XX	X	0	
SERIES NO:	CONNECTOR:	MALE FEMALE:	ANGLE:	COLOR:	PIN Q' PY:	ROW NO:	
	H-HOUSING	M-MALE	0-180°	A-BLACK K-WHITE	02~20	1-SINGLE ROW	

Ordering Information & Dimensions

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	---	5.30	12	22.00	25.30
03	4.00	7.30	13	24.00	27.30
04	6.00	9.30	14	26.00	29.30
05	8.00	11.30	15	28.00	31.30
06	10.00	13.30	16	30.00	33.30
07	12.00	15.30	17	32.00	35.30
08	14.00	17.30	18	34.00	37.30
09	16.00	19.30	19	36.00	39.30
10	18.00	21.30	20	38.00	41.30
11	20.00	23.30			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	1:1	Wang_jr	22.10.28			
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	22.10.28	B2001HM0-1XXX0	ENDE05	
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.10.28			REV: A0