


技术参数	
使用寿命	10000次(空载)
插拔力	<100N
额定电流	16A
电源相数	三相
额定电压	440V AC
接触阻抗	0.5m ohm Max.
绝缘电阻	>1000Mohm(DC500V)
工作环境温度	-30°C~+50°C
防护等级	IP55(插合状态)
线缆规格	5*2.5+1*0.75_TPE-线长4M 黑色

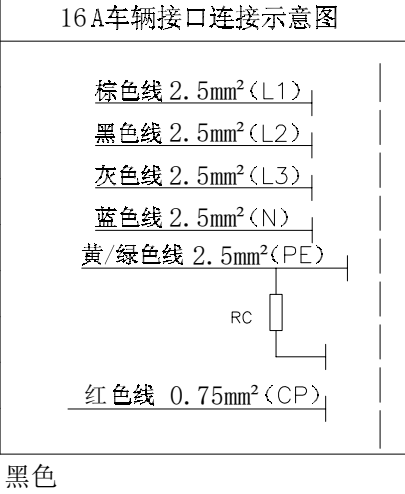

镭雕内容

型号: EVG12-16P7-XXXXX  
 规格: 440V AC/ 16A  
 D/C: XXXXXXXX-XXX

胶壳: 13962H00-3P-HF  
 端子: 13962TOP-2E

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	<b>JCTC</b> ® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
AO	NEW RELEASE		LINEAR	ANGLES	1:1				EVG12-16P7-50001
			0.0±0.25	X° REF±6°	APPROVED				
			0.00±0.15	X° ±3°	DESIGNER				DWG. NO: ENDE05
			UNIT: MM					TITLE: 国标交流充电枪	REV: A1
			SIZE: A4	0.000±0.08	X° X'±2°	DRAWN			SHEET: 1/1