


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

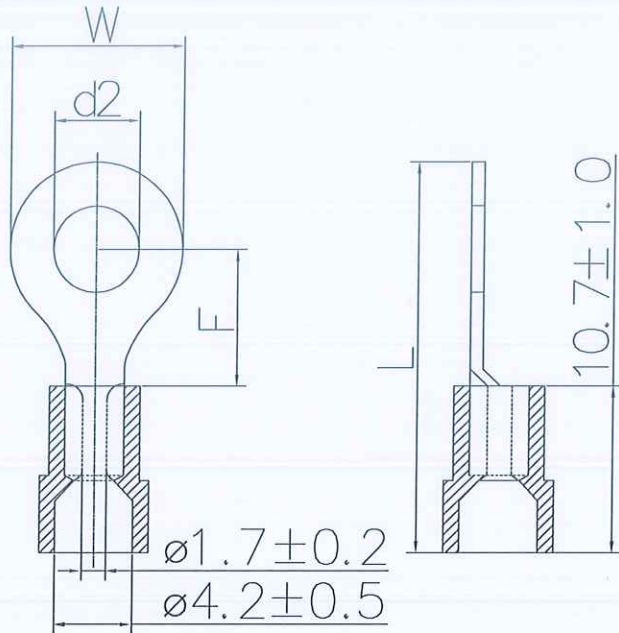

备注:

1. 端子材质: 紫铜, 厚度: 0.75 ± 0.03
2. 绝缘材质: PVC, 绝缘护套温度: 常温
绝缘护套颜色: 红色
3. 表面处理: 镀锡, 镀层厚度: $2.5\mu\text{m}-5\mu\text{m}$
镀层温度: $120^\circ / 2\text{小时}$
4. 接线类型: 绞合线
5. 最大电流: 19A

ItemNO. 料号	螺栓规格 Stud Size	mm/inch主要尺寸			
		d2	W	F	L
WLLR11-032AA03CA28	#4	3.2 ± 0.15	5.7 ± 0.15	4.9 ± 0.8	17.8 ± 0.8
WLLR11-037AA03CA29	#6	3.7 ± 0.15	5.7 ± 0.15	4.9 ± 0.8	17.8 ± 0.8
WLLR11-037AA03CA30	#6	3.7 ± 0.15	6.6 ± 0.15	6.3 ± 0.8	20.1 ± 0.8
WLLR11-037AA03CA31	#6	3.7 ± 0.15	8.0 ± 0.15	7.6 ± 0.8	21.5 ± 0.8
WLLR11-043AA03CA32	#8	4.3 ± 0.2	6.6 ± 0.15	6.3 ± 0.8	20.1 ± 0.8
WLLR11-043AA03CA33	#8	4.3 ± 0.2	8.0 ± 0.15	7.0 ± 0.8	21.5 ± 0.8
WLLR11-053AA03CA34	#10	5.3 ± 0.2	8.0 ± 0.15	7.0 ± 0.8	21.5 ± 0.8
WLLR11-053AA03CA35	#10	5.3 ± 0.2	9.8 ± 0.2	7.6 ± 1.0	23.0 ± 1.0
WLLR11-064AA03CA36	1/4	6.4 ± 0.3	9.8 ± 0.2	7.6 ± 1.0	23.0 ± 1.0
WLLR11-064AA03CA37	1/4	6.4 ± 0.3	11.6 ± 0.2	11.1 ± 1.0	27.5 ± 1.0
WLLR11-084AA03CA38	5/16	8.4 ± 0.3	11.6 ± 0.2	11.1 ± 1.0	27.5 ± 1.0
WLLR11-105AA03CA39	3/8	10.5 ± 0.7	13.6 ± 0.2	13.9 ± 1.0	31.6 ± 1.0
WLLR11-130AA03CA40	1/2	13.0 ± 0.7	19.2 ± 0.2	16.5 ± 1.0	36.0 ± 1.0

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME: 杨喜梅 DATE: 2011.11.17 PART NO.: WLLR11-XXXAA03CAXX	DWG.NO.: ENDE05
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED: 杨喜梅 21.11.17		
			UNIT:mm	0.00 ± 0.25	$X' \pm 3'$	DESIGNER: 杨喜梅 21.11.17		REV: A0
			SIZE: A4	0.000 ± 0.10	$X'X' \pm 2'$	DRAWN: 杨喜梅 21.11.17		SHEET: 1/1