
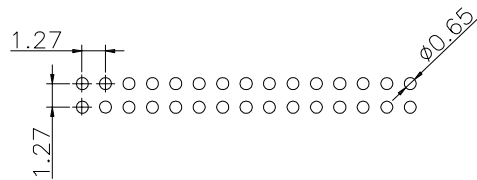
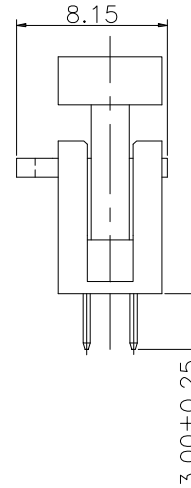
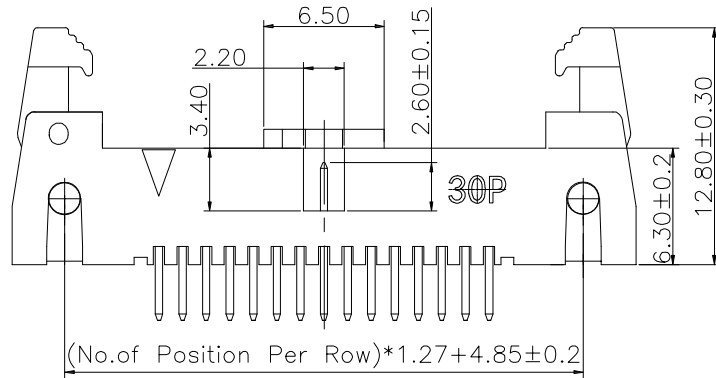


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

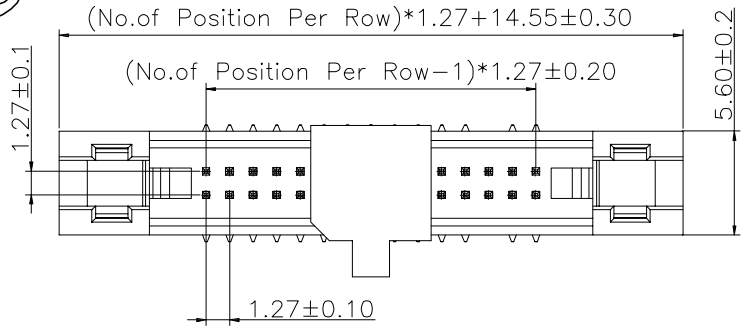

P.C.Board Layout

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.5KGF/pin min
 - 3-2.DURABILITY: 30 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 1A AC/DC
 - RATED VOLTAGE : 250V AC/DC
 - 4-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 1000V
- 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: TRAY
- 7.P/N:

SERIES NO: EJ12740 F 0-2 XX 1 X X X

MALE FEMALE: F-FEMALE

ANGLE: 9-90°
0-180°

ROW NO: 2-DOUBLE ROW

PIN Q'PY: 30PIN

HOUSING: 1-PBT 2-PA6T 3-PA9T 4-LCP

COLOR: A-BLACK K-WHITE S-NATURE

PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE Tin

TERMIPOINT: 1-DIP

| | | | | | | | | | | | |
|------|-----------------|----------|----------|--------------------|----------|------------|-------------|----------|-------------------------------|---------|---------------------------------|
| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | PART.NO: | DWG.NO: | WanLian Technology Co., Ltd |
| A0 | NEW RELEASE | 22.05.09 | | LINEAR | ANGLES | APPROVED | Wang_jr | 22.05.09 | EJ12740F0-2XX1XXX | ENDE05 | |
| | | | UNIT:mm | 0.00±0.25 | X'±3° | DESIGNER | Han_Gao | 22.05.09 | TITLE: | | |
| | | | SIZE: A4 | 0.000±0.10 | X'X' ±2° | DRAWN | LanXuan_Hou | 22.05.09 | Pitch 1.27mm 180° 双排 DIP 牛角母座 | | REV: A0 SHEET: 1/1 |