

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

A

B

C

D





E

F


G

H

RoHS

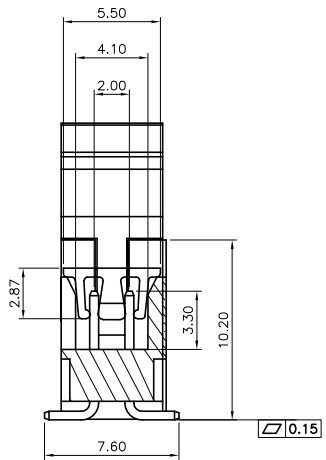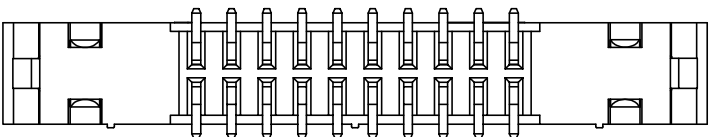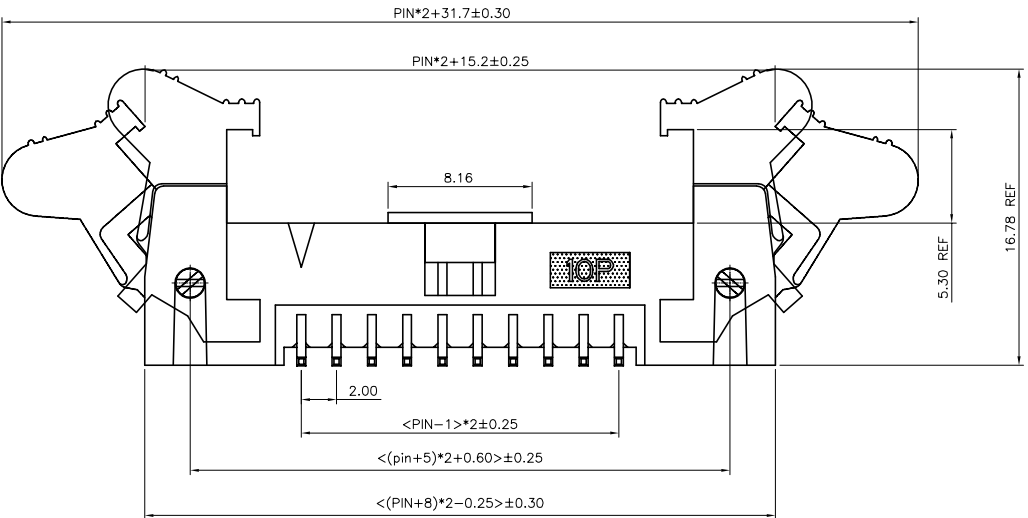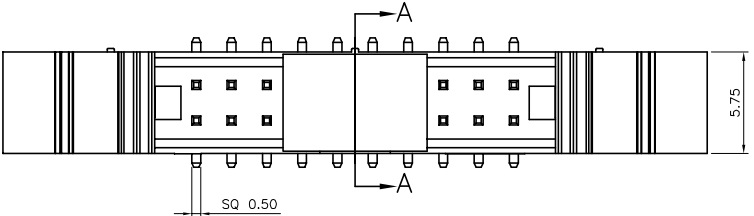

SCAELL: A-A

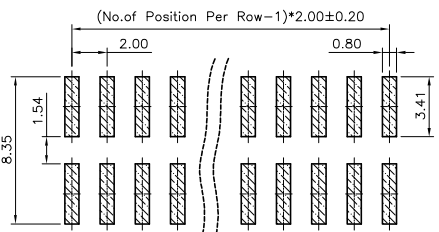

TOLERANCE: ±0.05, THICKNESS: 1.6mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 0.4KGF/pin min
3-2.DURABILITY: 300 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 1.5A
RATED VOLTAGE : 250V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 600V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -40°C~+105°C.
6.PACKAGE SPEC: TRAY
7.P/N:
EJ20750 F 0-2 XX 2 X X X
SERIES NO: _____ HOUSING:
1-PBT 2-PA6T
3-PA9T 4-LCP
MALE FEMALE: _____ COLOR:
F-FEMALE A-BLACK
K-WHITE
S-NATURE
ANGLE: _____ PLATING:
9-90° A-ALL AU G/F
0-180° C-BRIGHT TIN
D-MATTE Tin
ROW NO: _____
2-DOUBLE ROW
PIN Q' PY: _____ TERMIPOINT:
10~64 2-SMT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17	EJ20750F0-2XX2XXX	ENDE05		
			UNIT:mm	0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch 2.0mm 180° 双排 SMT 牛角 短耳 PC:7.61MM		REV: A0	SHEET: 1/1
				0.00±0.25	X'±3°	DRAWN	Zijun_Huang	21.11.17				
			SIZE: A4	0.000±0.10	X'X' ±2°							