


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS



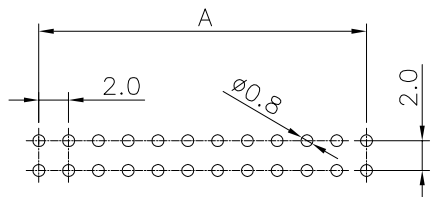


Recommend PCB Layout
General tolerance ± 0.05

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA6T,UL94V-0
 - CONTACTS: BRASS
 - PLATING SPECIFICATION:
 - CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - MECHANICAL PERFORMANCE:
 - RETENTIVITY FORCE: 0.4KGF/pin min
 - DURABILITY: 100 CYCLES.
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 2A
RATED VOLTAGE : 250V AC/DC
 - CONTACT RESISTANCE: 30 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 500V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+105^{\circ}\text{C}$.
 - PACKAGE SPEC: TRAY
 - P/N:

类型	尺寸“L”	尺寸“L1”
高耳	20.85	8.95
低耳	17.00	5.00

SERIES NO: EJ20750 F 9-2 XX 1 X X X
 MALE FEMALE: F-FEMALE
 ANGLE: 9-90°
 0-180°
 ROW NO: 2-DOUBLE ROW
 PIN Q' PY: 10~60
 TYPE: 1-高耳, 2-低耳
 COLOR: A-BLACK, K-WHITE, S-NATURE
 PLATING: A-ALL AU G/F, C-BRIGHT TIN, D-MATTE Tin
 TERMIPOINT: 1-DIP

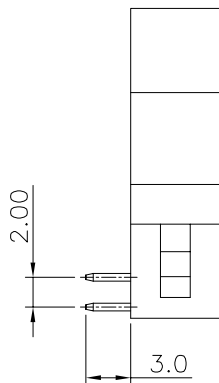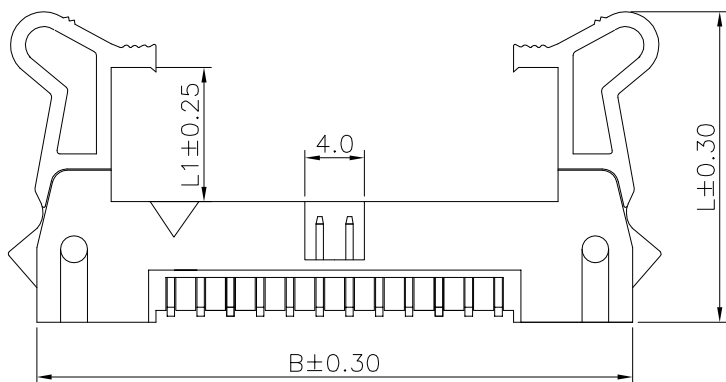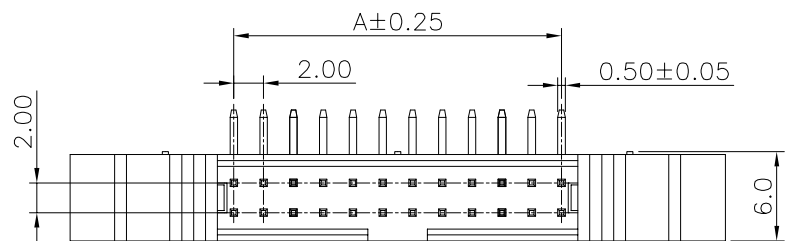

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
06	4.00	21.92	12.60	30	28.00	45.92	36.60
08	6.00	23.92	14.60	34	32.00	49.92	40.60
10	8.00	25.92	16.60	36	34.00	51.92	42.60
12	10.00	27.92	18.60	40	38.00	55.92	46.60
14	12.00	29.92	20.60	44	42.00	59.92	50.60
16	14.00	31.92	22.60	50	48.00	65.92	56.60
20	18.00	35.92	26.60	60	58.00	75.92	66.60
24	22.00	39.92	30.60	64	60.00	77.92	70.60
26	24.00	41.92	32.60				

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 万连科技 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1	APPROVED	DESIGNER			
			0.00±0.25	X'±3'		DESIGNER	Han_Gao	21.11.17	EJ20750F9-2XX1XXX	ENDE05	REV: A0 SHEET: 1/2
			0.00±0.10	X'X' ±2'		DRAWN	Zijun_Huang	21.11.17			