
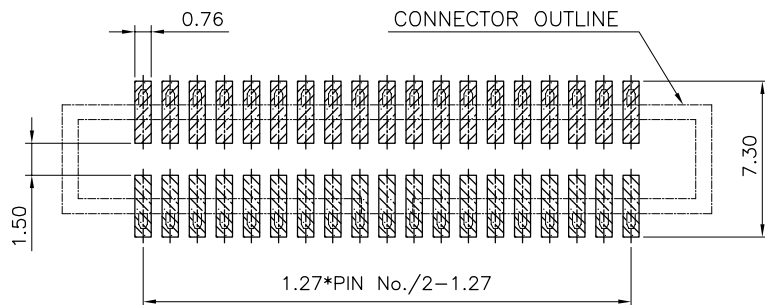

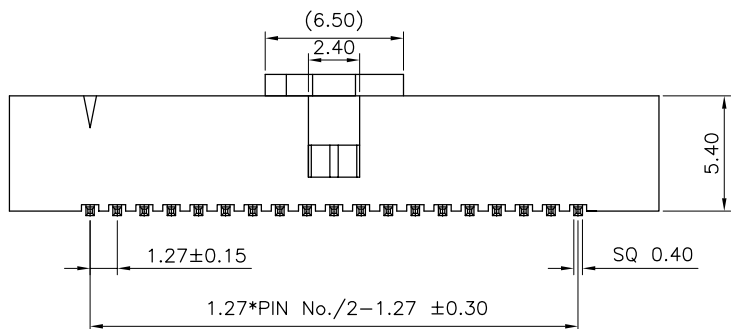


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

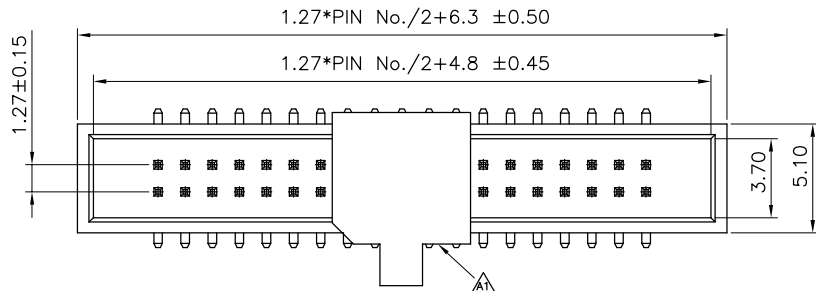

TOLERANCE: ±0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA6T,UL94V-0
 - CONTACTS: BRASS
 - PLATING SPECIFICATION:
 - CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 1A AC/DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 300V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - PACKAGE SPEC: TRAY/REEL
 - P/N:

SERIES NO: BH1274 F 0-2 XX 2 X X X

MALE FEMALE: F-FEMALE

ANGLE: 0-180°

ROW NO: 2-DOUBLE ROW

PIN Q'PY: 06~64

PACKAGE SPEC:
1-TEAY (不帶帽)
2-REEL (帶帽)

COLOR:
A-BLACK
S-NATURE

PLATING:
A-ALL AU G/F

TERMIPOINT:
2-SMT

Dimenison Antitheses List		
Item	W	H
Standard	6.5	5.6
Select		


REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	Wang_jr	23.12.08	BH1274F0-2XX2XXX	ENDE05
A1	CAP CHANGE	23.12.08	0.0±0.35	X'REF±6°		Han_Gao	23.12.08		
			0.00±0.25	X'±3°		Zijun_Huang	23.12.08	TITLE: Pitch 1.27mm 180° 双排 SMT+CAP 筒牛 PC:6.5MM	
			0.000±0.10	X'X' ±2°					REV: A1 SHEET: 1/2




WanLian Technology Co., Ltd

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS


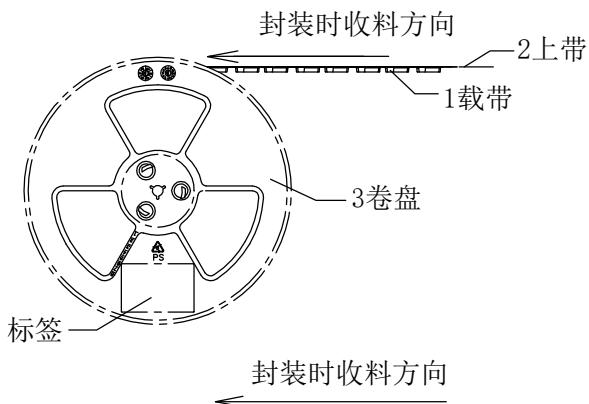


卷装装箱流程 (Reel packaging process)

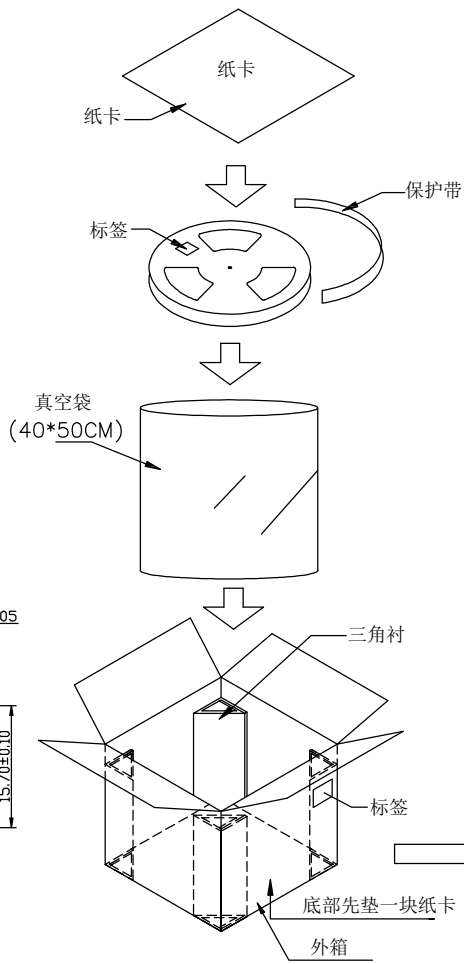

卷装规范: (Reel packaging specifications)

1. 外箱底部先垫一片纸卡;
2. 外箱四个内角各放置一个三角衬;
3. REEL之标签一律朝上;
4. 一个REEL装一个真空袋并放一包干燥剂, 抽真空;
5. 将所有包装好的产品放进外箱;
6. 上层放一片纸卡;
7. 外箱贴标签、ROHS标签;
8. 500PCS/卷, 前后空格各32pcs, 8卷每箱.

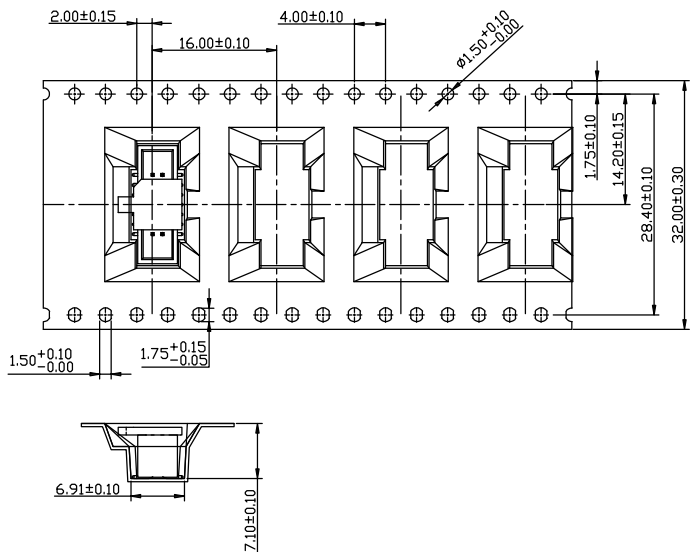

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.12.08	BH1274F0-2XX2XXX	ENDE05		
A1	CAP CHANGE	23.12.08	UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	23.12.08	TITLE: Pitch 1.27mm 180° 双排 SMT+CAP 筒牛 PC:6.5MM		REV: A1	SHEET: 2/2
				SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang				