
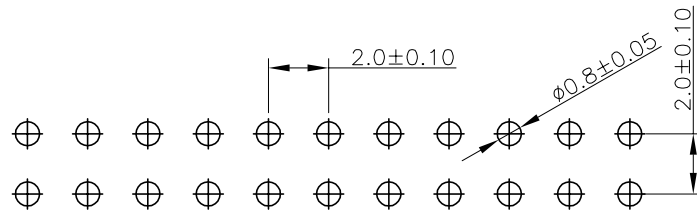

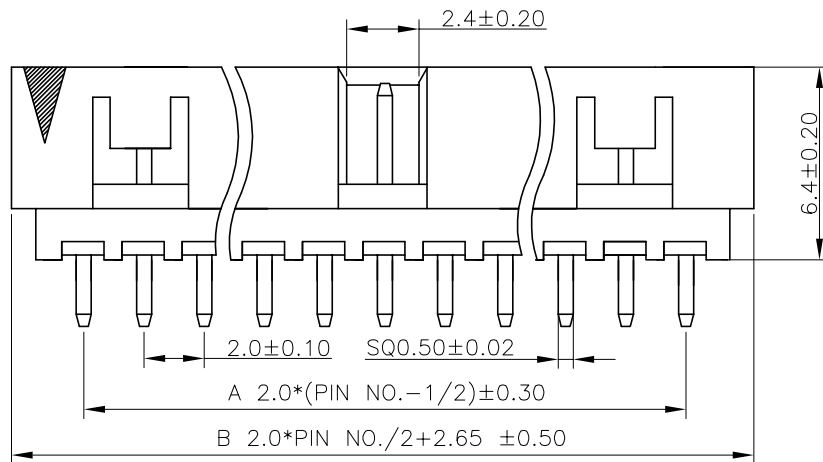


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

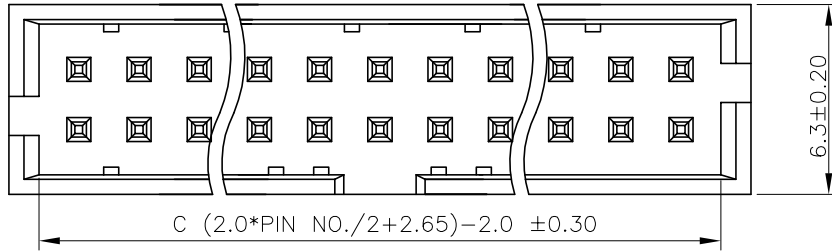

Recommended PCB layout

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.4KGF/pin min
 - 3-2.DURABILITY: 300 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 2A
RATED VOLTAGE : 500V AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 500V
- 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: TRAY
- 7.P/N: BH20740 F 0-2 XX 1 X X X

SERIES NO:	F	0-2	XX	1	X	X	X	HOUSING:
MALE FEMALE:								1-PBT 2-PA6T
F-FEMALE:								3-PA9T 4-LCP
ANGLE:								COLOR:
9-90°								A-BLACK
0-180°								K-WHITE
								S-NATURE
ROW NO:								PLATING:
2-DOUBLE ROW								A-ALL AU G/F
								C-BRIGHT TIN
								D-MATTE Tin
PIN Q'PY:								TERMIPOINT:
02~80								1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR 0.00±0.25 SIZE: A4	ANGLES X°REF±6° X°±3° X°X' ±2°	1:1	APPROVED	Wang_jr	21.10.15	BH20740F0-2XX1XXX	
			UNIT:mm			DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.0mm 莫仕筒牛 2XNP 塑高6.4 180度 带窗口 PC2.5		REV: A0
			SIZE: A4			DRAWN	Gao_Han	21.10.15			SHEET: 1/1

WanLian Technology Co., Ltd