

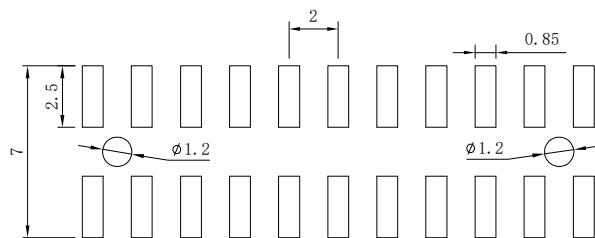
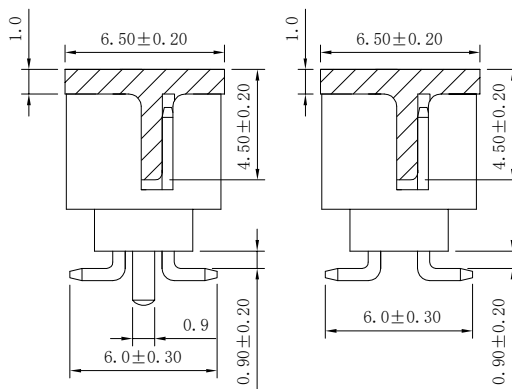
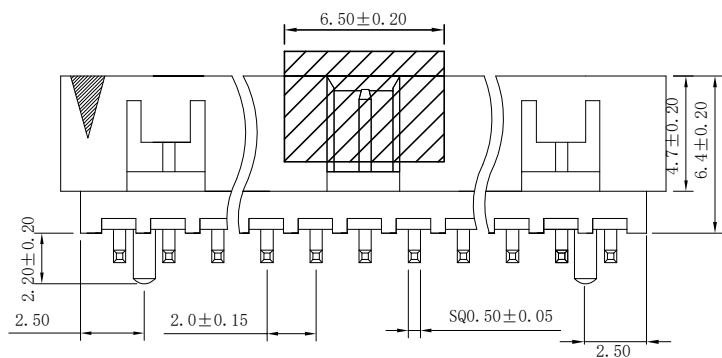


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

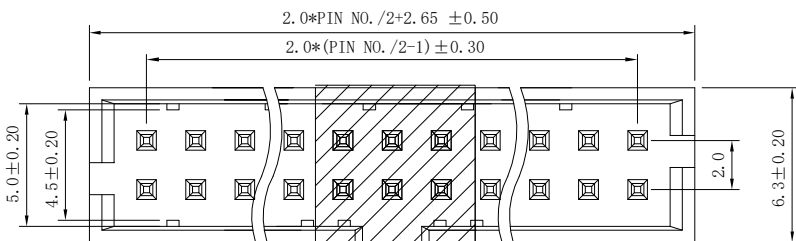

PCB LAYOUT




塑膠(開窗)可做的pin數: 14.16.18.20.22.24.26.28.30.34.40.44.50

塑膠(無窗)可做的pin數: 6.8 10 .12 无窗口

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: UL94V-0
 - CONTACTS: BRASS
- PLATING SPECIFICATION:
 - CONTACTS:
- MECHANICAL PERFORMANCE:
 - RETENTIVITY FORCE: 0.4kgf / pin min
 - DURABILITY: 300 CYCLES.
- ELECTRICAL PERFORMANCE:
 - RATED CURRENT : 1.5A AC,DC
RATED VOLTAGE : 500V AC/DC
 - INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 20mΩ(MAX.)
 - WITHSTANDING VOLTAGE: 500V AC/minute
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PACKAGE SPEC: REEL
- P/N:

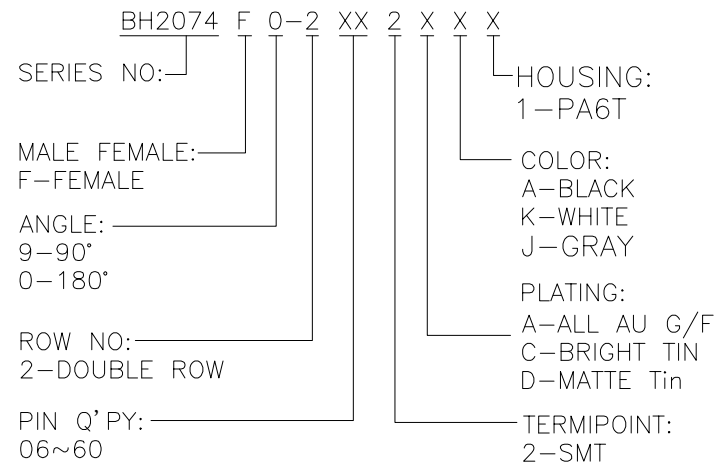

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	BH2074F0-2XX2XXX	ENDE05	
			0.0±0.35	X'REF±6°	DESIGNER	Gao_Han	21.10.15	TITLE:			
			UNIT:mm	X'±3°	DRAWN	Gao_Han	21.10.15	Pitch 2.0mm 180°MX 双排 SMT 筒牛			
			SIZE: A4	0.000±0.10	X'X' ±2°					REV: A0	SHEET: 1/1