
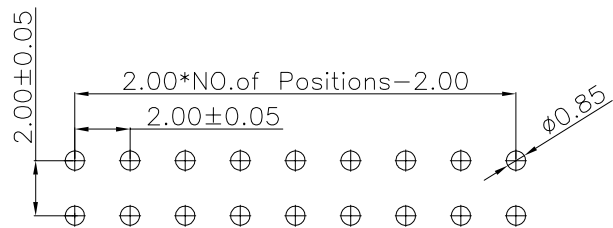

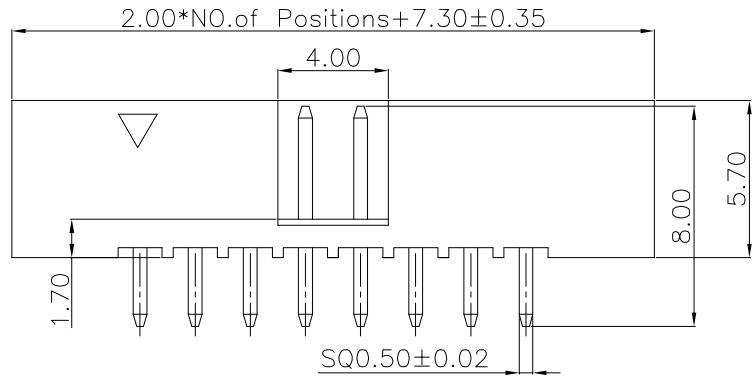


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

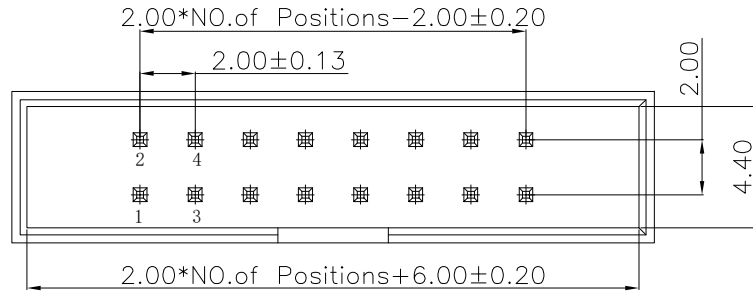

P. C. B LAYOUT

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.4KGF/pin min
 - 3-2.DURABILITY: 100 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 2A
 - RATED VOLTAGE : 250V AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 1000V
 - 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
 - 6.PACKAGE SPEC: PE BAG
 - 7.P/N: BH20753 F 0-2 XX 1 X X X
- SERIES NO: [] HOUSING: 1-PBT 2-PA6T 3-PA9T 4-LCP
- MALE FEMALE: [] COLOR: A-BLACK K-WHITE S-NATURE
- ANGLE: [] 0-180°
- ROW NO: [] PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE Tin
- PIN Q' PY: [] 06~64 TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	BH20753F0-2XX1XXX	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.05.09	2.0 Pitch H5.7mm Dual Row Straight Box Header		