
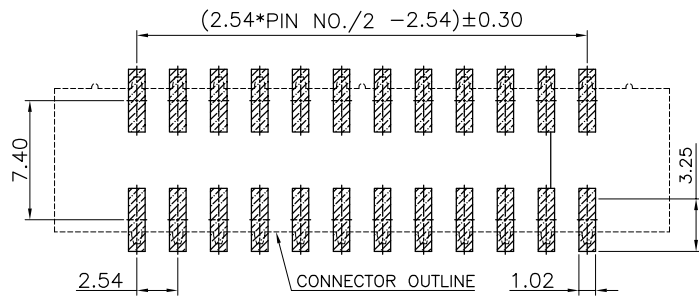

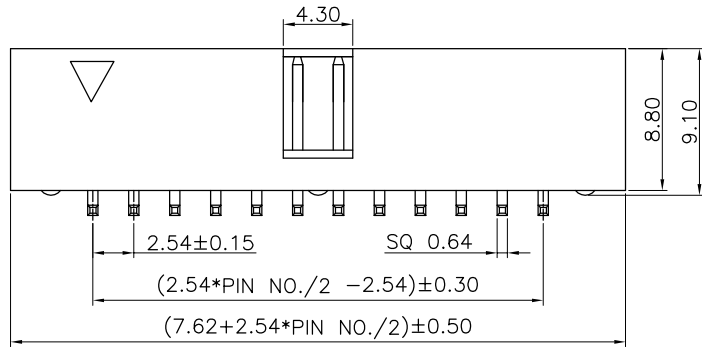


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

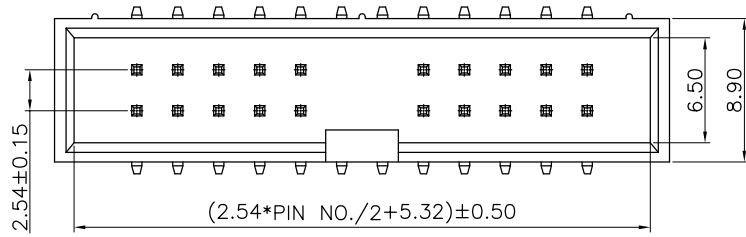

TOLERANCE: ±0.05, THICKNESS: 1.6mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA6T, UL94V-0
 - CONTACTS: BRASS
 - PLATING SPECIFICATION:
 - CONTACTS: GOLD FLASH/TIN OVER NICKEL
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 3A
 - CONTACT RESISTANCE: 30 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING: 500V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - PACKAGE SPEC: TRAY
 - P/N:

BH25530 F 0-2 XX 2 X X X

SERIES NO: _____ HOUSING: 2-PA6T

MALE FEMALE: _____ COLOR: A-BLACK

F-FEMALE _____ PLATING: A-ALL AU G/F

ANGLE: _____ PLATING: A-ALL AU G/F

0-180° _____

ROW NO: _____ PLATING: A-ALL AU G/F

2-DOUBLE ROW _____

PIN Q'PY: _____ TERMIPOINT: 2-SMT

06~40 _____

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	BH25530F0-2XX2XXX	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15	Pitch 2.54mm 180° 双排 SMT +CAP 筒牛 PC:10.25MM		