

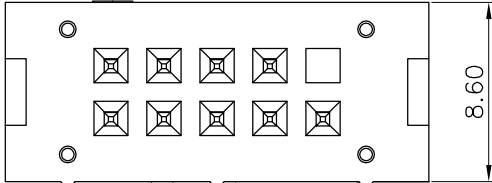

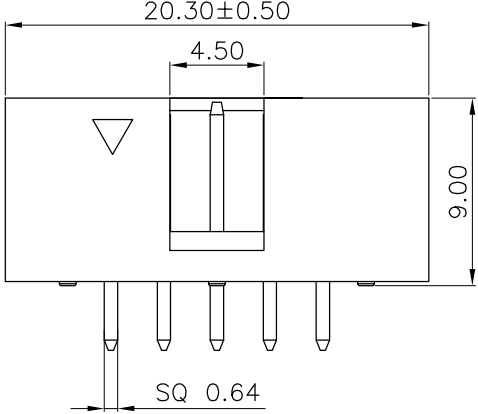


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

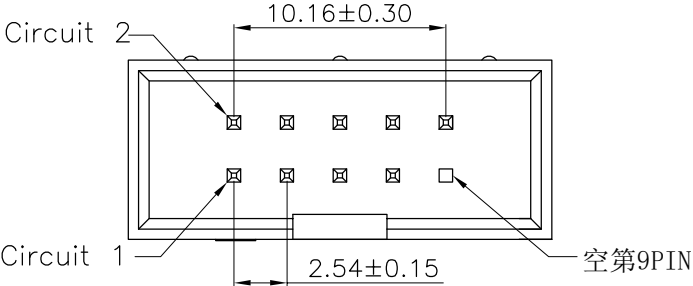

PCB LAYOUT

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 1000V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: TRAY
6.P/N:

BH25534 F 0-2 10 1 A A 2
SERIES NO: HOUSING: 2-PA6T
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
COLOR: A-BLACK
PLATING: A-ALL AU G/F
PIN Q'PY: 10
TERMIPOINT: 1-DIP

H	REV.		REVISION RECORD		DATE			GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:		DWG.NO:		 WanLian Technology Co., Ltd		H				
	AO		NEW RELEASE		21.10.15			LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	BH25534F0-2101AA2		ENDE05								
							0.0±0.35	X°REF±6°															
							UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.54mm 180° 双排 DIP 2*05P 筒牛 空第9PIN										
							SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Gao_Han	21.10.15											
1			2			3			4			5			6			7			8		