


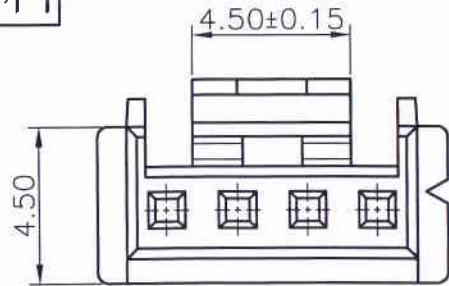
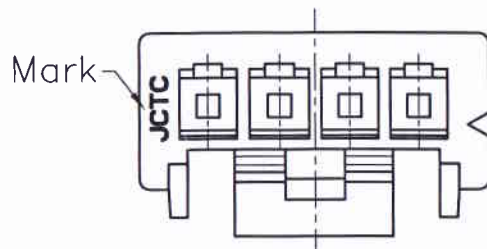
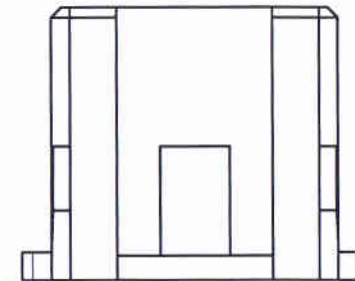


环保物料

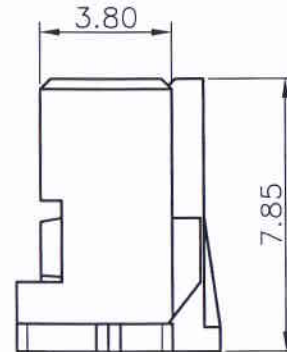

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

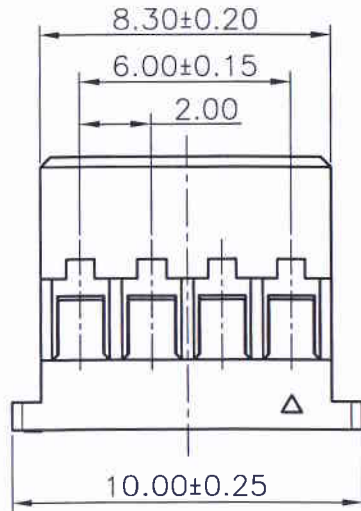

12002H00-NP-L-S1-HF
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ L : Mount type
- ⑤ S1 : S1 Type
- ⑥ HF : Halogen Free



Suitable for JCTC 12002 series terminal

Part No.	Material	Color
12002H00-4P-L-S1	Nylon 66,UL94V-0	Natural(White)
12002H00-4P-L-S1-HF	Nylon 66,UL94V-0	Natural(White)

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE
C0	新图面发行	11.03.07	LINEAR	ANGLES	1:1		
C1	修改Mark方向	12.03.07	0.0±0.25	X° REF±6°	APPROVED	伍文聪	15.09.12
C2	增加HF规格	15.09.12	0.00±0.15	X° ±3°	DESIGNER	伍文聪	15.09.12
			SIZE: M4	0.000±0.08	DRAWN	伍文聪	15.09.12

JCTC® 苏州伟聚 东莞胜景
 TERMINAL&CONNECTORS 东莞胜蓝

PART. NO: 12002H00-4P-L-S1	
DWG. NO: ENDE05	
REV: C2	SHEET: 1/1

1

2

3

4

5

6

7

8