
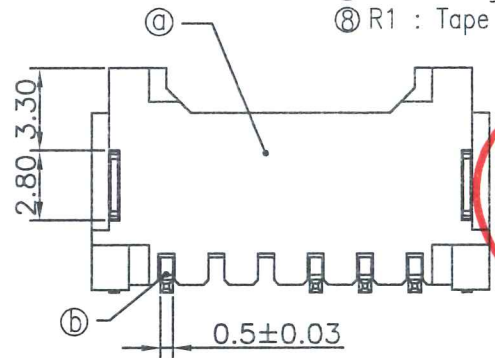
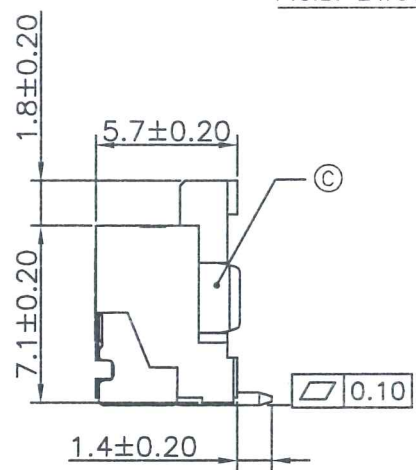


P.C.B. LAYOUT

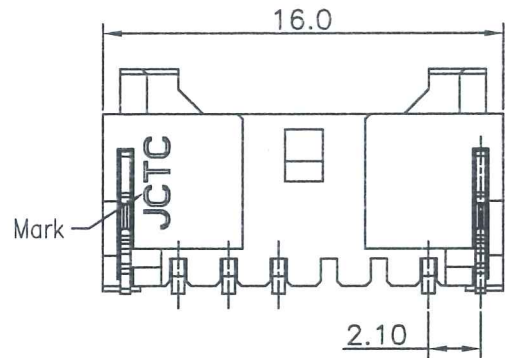

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C





12002W00-NP-SA-01-XX-R1

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S : SMT TYPE
- ⑤ A : A TYPE
- ⑥ 01 : 2#\3# KEYED
- ⑦ HF : Halogen Free
- ⑧ R1 : Tape & Reel(With Mylar)



No.	Description	Material	Color
a	Insulator	High temperature plastic,UL94V-0	Natural(Beige)
b	PIN	Brass/Tin-plated	--
c	Solder Tabs	Brass/Tin-plated	--
d	Mylar	Polyimide glue	Orange

REV.	REVISION RECORD	DATE	UNIT: MM SIZE: A4	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 JCTC [®] TERMINAL&CONNECTORS	
AO	新图面发行	21.12.02			LINEAR	ANGLES	APPROVED	Nelson	21.12.02	12002W00-6P-SA-01-XX-R1		ENDE05
				0.0±0.25	X° REF±6°	DESIGNER	VM	21.12.02	TITLE PA 2.00mm PITCH 180° SMT WAFER			
				0.00±0.15	X° ±3°	DRAWN	HZJ	21.12.02	REV	AO		SHEET
				0.000±0.08	X° X' ±2°							

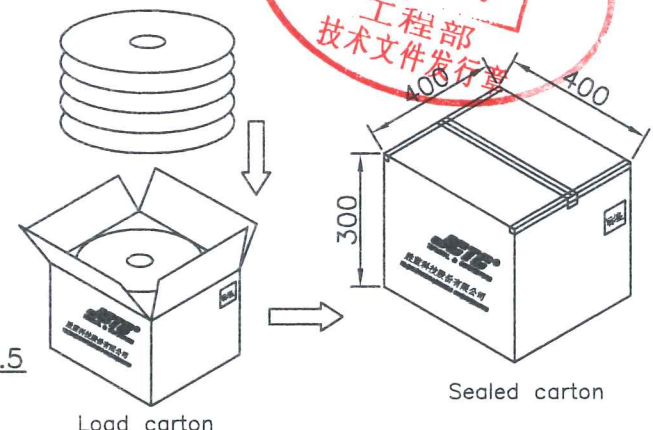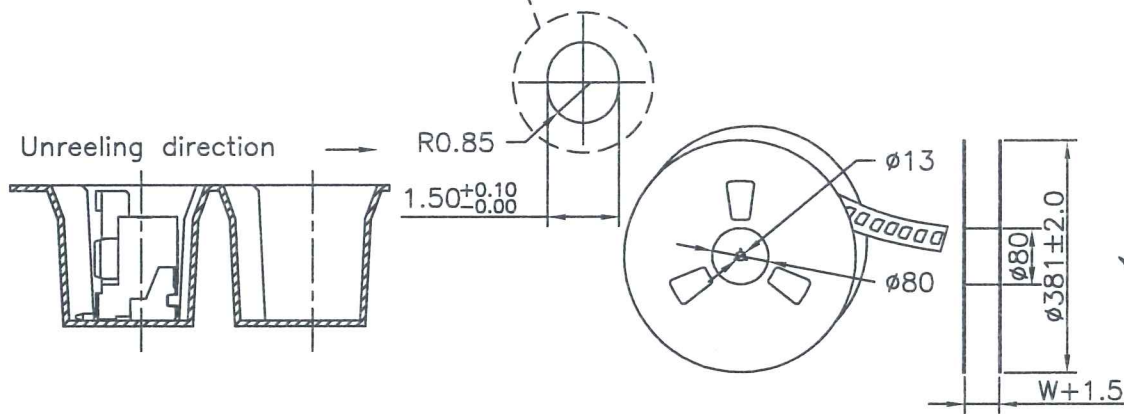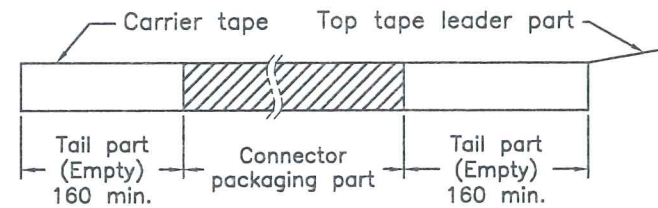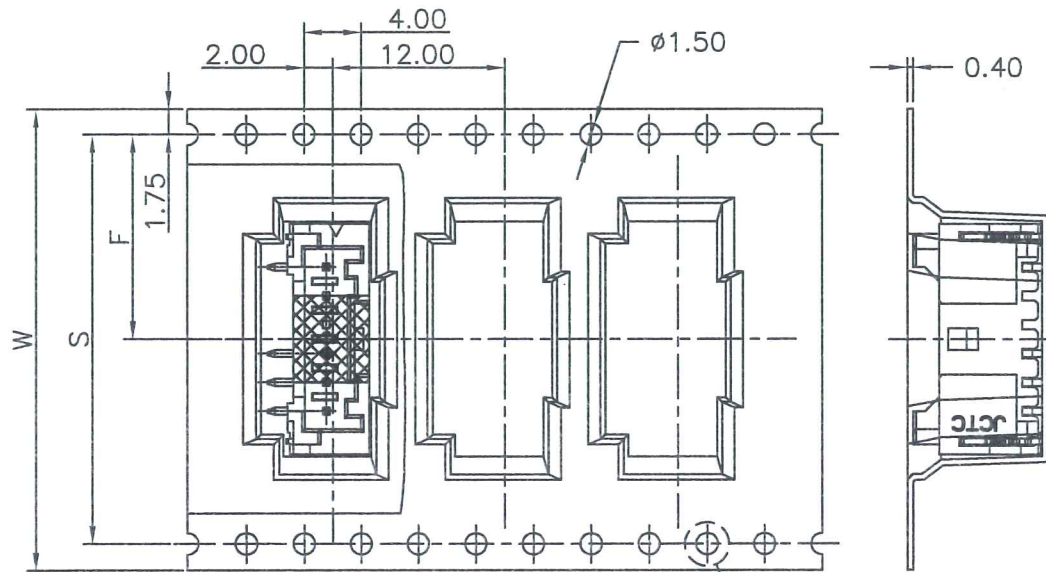

Number of Contacts	W±0.3	F±0.1	S±0.1	Pcs/Reel	Pcs/Box
6P	32	14.20	28.40	750	6000

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS			
AO	新图面发行	21.12.02		LINEAR	ANGLES	1:1	<i>Nelson</i>	21.12.02	12002W00-6P-SA-01-XX-R1	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED									
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	<i>VM</i>	21.12.02	TITLE					
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	HZJ	21.12.02	PA 2.00mm PITCH 180° SMT WAFER					