

① CAP
(FOR PICK AND
PLACE SYSTEMS)

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 Contact: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Thermal Plasticity Resin, UL94V-0
 Halogen Free
 Color: Natural(Beige)
 The product using material and processing
 must conform to the "WI-PZ-142"HSF
 technical standard control requirements


Circuits	Dimensions		
	A	B	C
2P	--	8.00	0.78
3P	4.00	10.00	1.20
4P	6.00	12.00	1.50
5P	8.00	14.00	1.50
6P	10.00	16.00	1.50
7P	12.00	18.00	1.50
8P	14.00	20.00	1.50
9P	16.00	22.00	1.50

12002W90-NP-SA-HF-S1-R
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ S : SMT TYPE
- ⑤ A : A TYPE
- ⑥ HF : Halogen Free
- ⑦ S1 : With Cap
- ⑧ R : Tape & Reel(With Cap)



REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART NO:
C0	新图面发行	14.05.05		LINEAR		APPROVED			
C1	更新公司名称	19.07.22		0.0±0.25	X° REF±6°	DESIGNER	19.07.22		DWG. NO:
				0.00±0.15	X° ±3°	DRAWN	伍文聪	TITLE: PA 2.00mm PITCH 90° SMT WAFER	ENDE05
			SIZE: A4	0.000±0.08	X° X'±2°				REV: C1 SHEET: 1/2

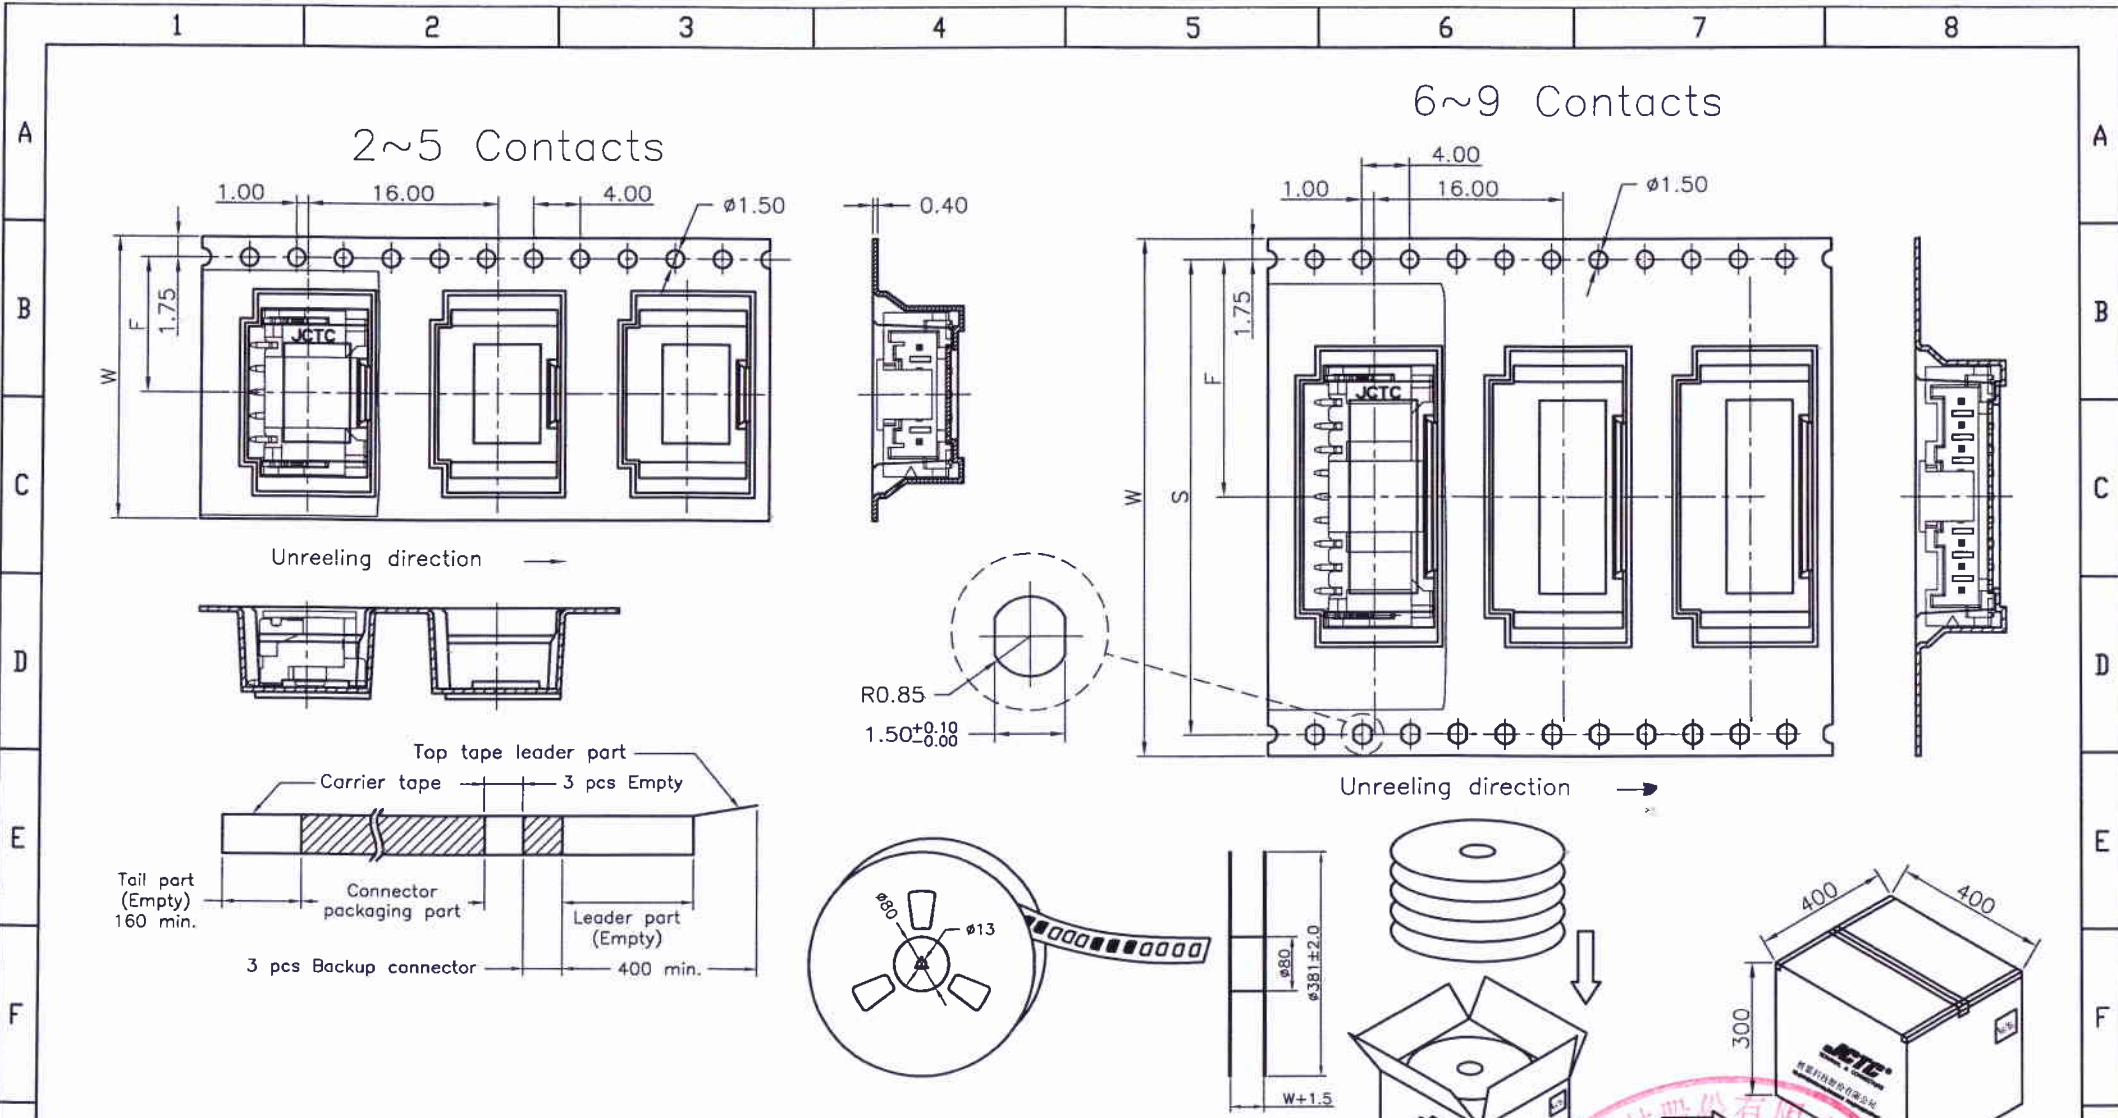

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel	Q'ty/Reel
2~5P	24	11.50		800pcs	8000pcs
6~7P	32	14.20	28.40	800pcs	6400pcs
8~9P	44	20.20	40.40	800pcs	4800pcs

REV.	REVISION RECORD	DATE	
C0	新图面发行	14.05.05	
C1	更新公司名称	19.07.22	

GENERAL TOLERANCES		SCALE:	NAME	DATE
LINEAR	ANGLES	1:1		
0.0±0.25	X° REF±6°	APPROVED		
0.00±0.15	X° ±3°	DESIGNER		19.07.22
0.000±0.08	X° X'±2°	DRAWN	伍文聪	19.07.22

JCTC® 胜蓝科技股份有限公司
 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司
 TITLE: PA 2.00mm PITCH 90° SMT WAFER

PART NO:	
12002W90-NP-SA-HF-S1	
DWG. NO:	
ENDE05	
REV:	SHEET:
C1	2/2