
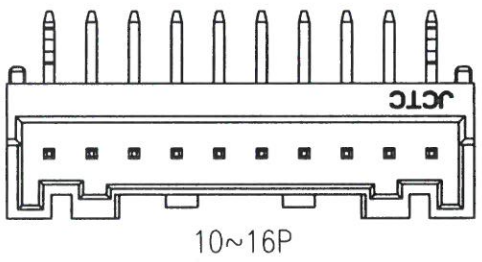



P.C.B. LAYOUT

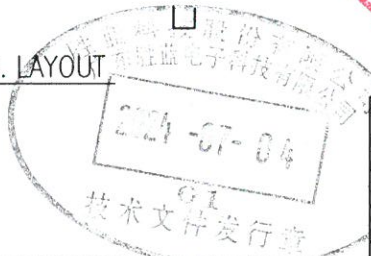

- 12002W90-NPX-L
- ① ② ③④⑤
- ① Series No.
  - ② W90 : Side Contact  
W00 : Up Contact
  - ③ No. of Circuits
  - ④ Color: A-Black Blank-Natural type
  - ⑤ L : With Lock

Specifications:  
 Rated Voltage : 250V AC/DC  
 Rated Current : 3A AC,DC  
 Withstand Voltage : 800V AC/minute  
 Contact Resistance : 10mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C  
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

PART NO.	Dimensions	
	A	B
2P	--	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

Part No.	Insulator	PIN Material
12002W90-NPA-L	Nylon 66,UL94V-0/Black/无卤	Brass/Tin-plated
12002W90-NP-L	Nylon 66,UL94V-0/Natural(White)/无卤	Brass/Tin-plated

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
C0	新图面发行	11.03.10		LINEAR	ANGLES	APPROVED	WJA	24.07.03						
C1	更新公司名称	17.05.27	0.0±0.25	X° REF±6°	DESIGNER	ZJH	24.07.03	TITLE PA 2.00mm PITCH DIP TYPE WAFER	12002W90-NPX-L	ENDE05	REV	C3	SHEET	1/1
C2	依WR1904100058变更	19.04.10	0.00±0.15	X° ±3°	DRAWN	WDN	24.07.03							
C3	依YB202401120002新增规格	24.07.03	0.000±0.08	X° X' ±2°										