

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

A

B



D



G



- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA4T,UL94V-0
 - 1-2.CONTACTS: PHOSPHOR BRONZE
 - 1-3.SOLDER TABS: PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
 - 2-2.SOLDER TABS:
MATTE TIN
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 1.5A
RATED VOLTAGE : 50V
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 100MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V AC
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

SERIES NO:-

CONNECTOR:
W-WAFER

ANGLE:
9–90°

ROW NO: _____
1-SINGLE ROW

PIN Q' PY:
04~06

- COLOR:
A-BLACK
S-NATURE

- PLATING:
A-ALL AU G/F

—TERMIPOINT:
2-SMT

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
04	3.60	6.60	5.04	08	8.40	11.40	9.84
05	4.80	7.80	6.24	09	9.60	12.60	11.04
06	6.00	9.00	7.44	10	10.80	13.80	12.24
07	7.20	10.20	8.64				

H

WanLian Technology Co., Ltd

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

Empty 20Holes

空20穴

Product 4000PCS

32000mm

Leader Part Empty 20holes

前空 20穴


Axes

32256mm

TOP TAPE 320mm
上带320mm

Note:

1. Carrier Camber Is Within 1mm In 100mm ; 带长100mm 内容许弯曲度1mm
2. 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
3. Material for PS ; 材质为PS 无卤 透明
4. Thickness=0.30±0.05 ; 材料厚度为0.30±0.05mm
5. Carton material 纸箱材质:K=K; Carton Thickness纸箱厚度: 6~7mm

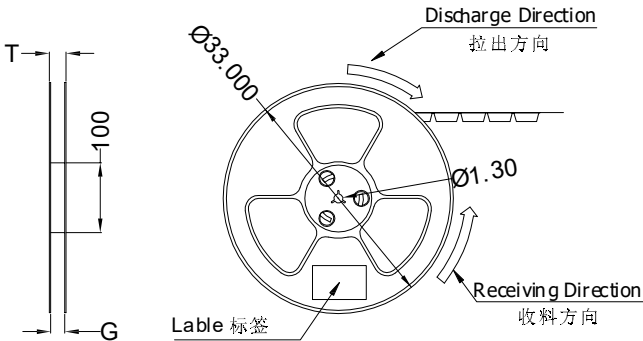


Lable 标签

Single hole: None Hole Side

单孔: 贴无键孔侧

Double hole: Elliptical Hole Side

双孔: 贴椭圆孔侧

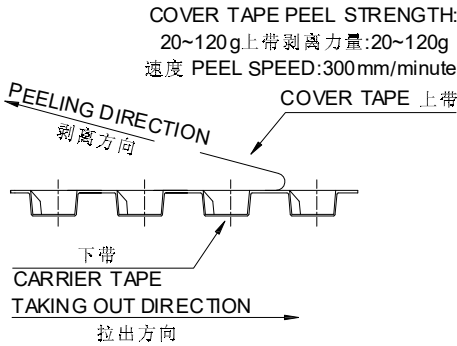


PEELING DIRECTION

剥离方向



COVER TAPE 上带

CARRIER TAPE
TAKING OUT DIRECTION

拉出方向

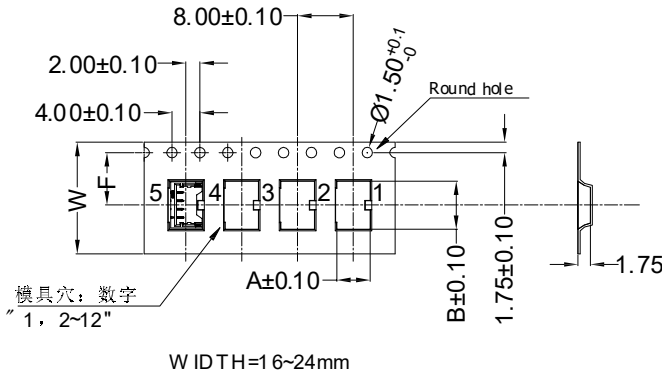

WIDTH=16~24mm

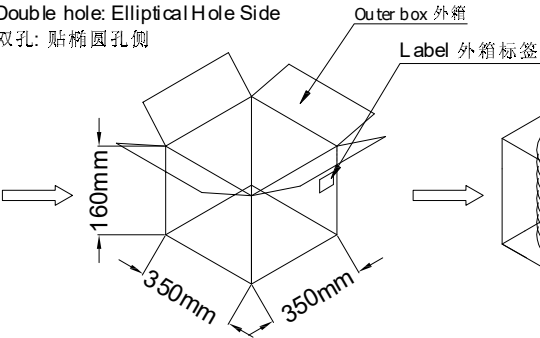

Circuit	A	B	W	S	F	T (MAX)	G (MAX)	REEL PCS	CARTON R	CARTON PCS
02	4.80	4.50	16	/	7.50	20.50	16.40	4000	7R	28K
03		5.70								
04		6.90								
05		8.10								
06		9.30	24	/	11.50	28.50	24.40	4000	5R	20K

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1201W9-1XX2XX1	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19				
				0.0±0.35	X°REF±6°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch 1.20mm MX 90° 单排超薄贴片 Wafer			
				UNIT: mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou		22.03.19		
			SIZE: A4	0.000±0.10	X°X' ±2°						REV: A0	SHEET: 3/3