
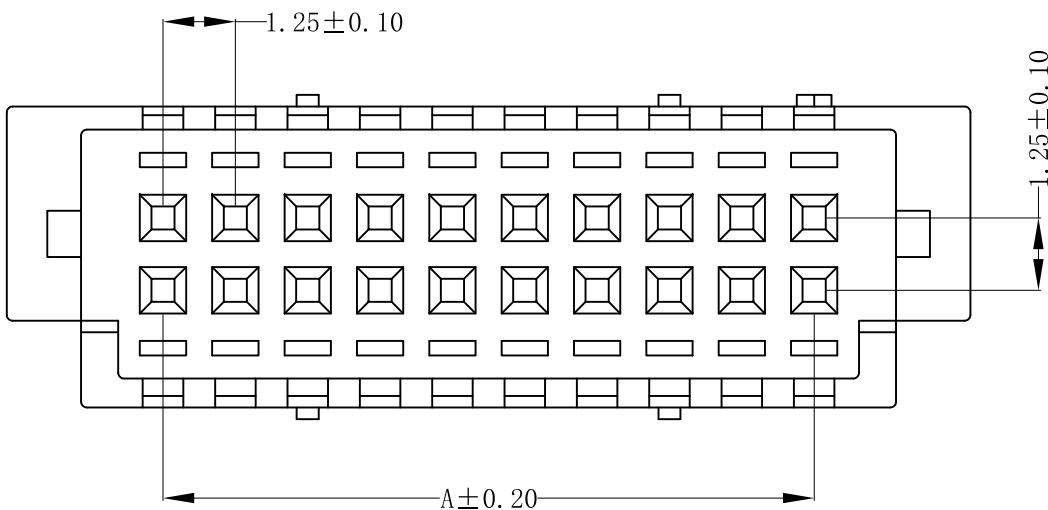
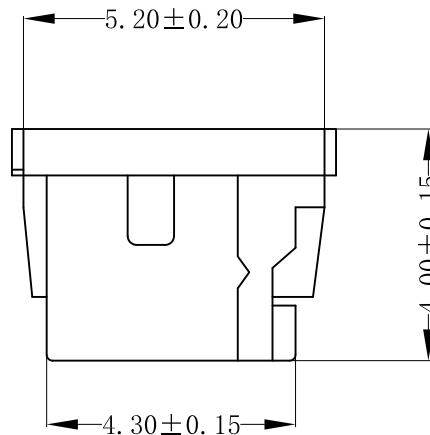


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

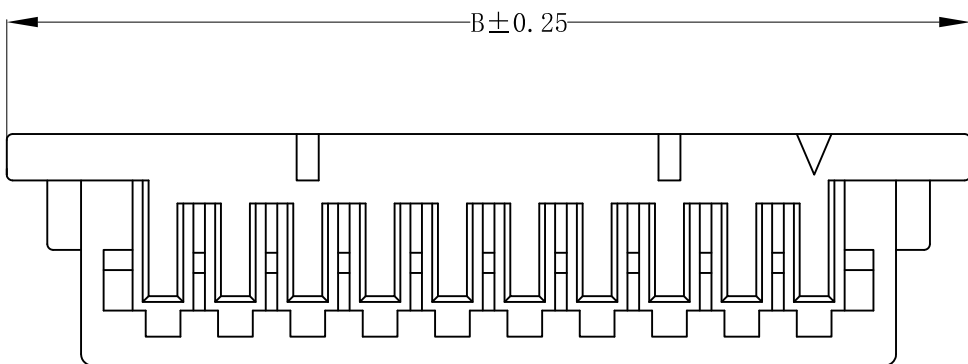

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING:PA66 UL94V-0

2.MECHANICAL PERFORMANCE:

2-1.RETENTIVITY FORCE: 0.3kgf/pin MAX

2-2.DURABILITY: 50 CYCLES.

3.ELECTRICAL PERFORMANCE:

4-1. RATED CURRENT : 1A AC,DC

RATED VOLTAGE : 150V AC,DC

4-2.INSULATION RESISTANCE: 500MΩ MIN

4-3.CONTACT RESISTANCE : 30mΩ MAX

4-4.WITHSTANDING VOLTAGE:500V AC/MINUTE

4.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25°C~+85°C.

5.PACKAGE SPEC: PE BAG

6.P/N:

A1252 H M-2 XX X X

SERIES NO:   
 0-ROHS2.0+HF   
 1-ROHS2.0

CONNECTOR:   
 H-HOUSING

MALE FEMALE:   
 M-MALE



ROW NO:   
 2-DOUBLE ROW

HOUSING:   
 0-ROHS2.0+HF   
 1-ROHS2.0

COLOR:   
 A-BLACK   
 K-WHITE   
 S-NATURE   
 J: Grey

PIN Q'PY:   
 10~50

POLES	DIMENSION(mm)	
	A	B
2*5	5.00	10.45
2*6	6.25	11.70
2*7	7.50	12.95
2*10	11.25	16.70
2*15	17.50	22.95
2*20	23.75	29.20
2*25	30.00	35.45

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.01.13	 LINEAR 0.0±0.35	ANGLES X°REF±6°	1:1	Wang_jr	21.01.13	A1252HM-2XXXX	ENDE05	
					UNIT:mm	X°±3°	APPROVED	Han_Gao	21.01.13	
			SIZE: A4	0.000±0.10	DESIGNER	Zijun_Huang	21.01.13	Pitch 1.25mm双排带凸Housing	SHEET: 1/1	