




The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements





RoHS+HF

Circuit 1

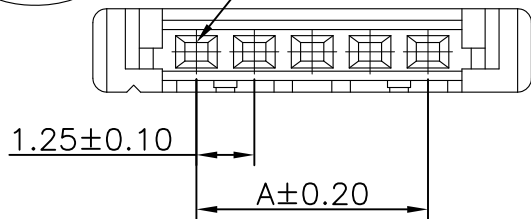

02P

03P

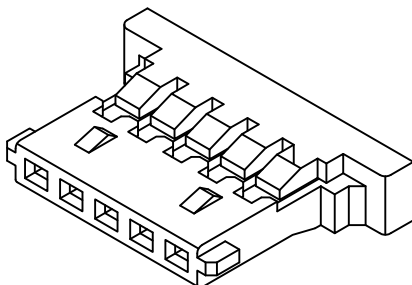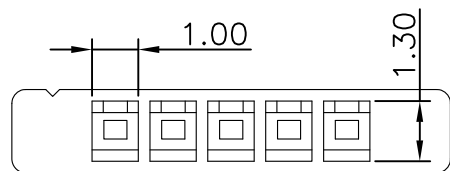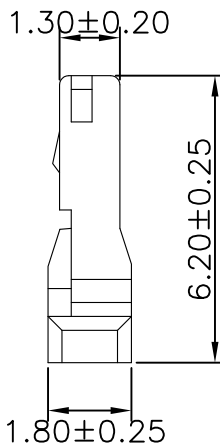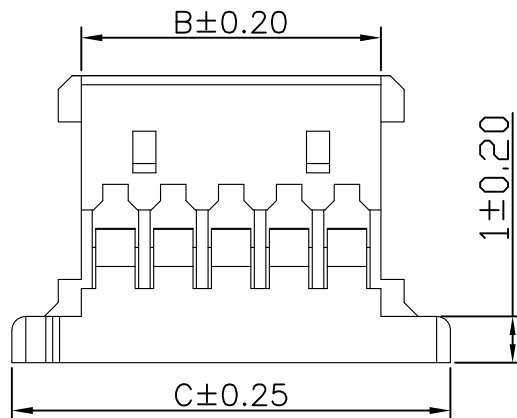

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA66,UL94V-0

2.MECHANICAL PERFORMANCE:

2-1.RETENTIVITY FORCE: 0.5KGF/pin min

2-2.DURABILITY: 25 CYCLES.

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 1A

RATED VOLTAGE : 125V AC/DC

3-2.CONTACT RESISTANCE: 20 mΩ MAX

3-3.INSULATION RESISTANCE: 100MΩ Min

3-4.DIELECTRIC WITHSTANDING : 500V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -25°C~+85°C.

5.PACKAGE SPEC:PE BAG

6.P/N: A1254 H M-1 XX X X

SERIES NO: -

CONNECTOR:
H-HOUSING

MALE FEMALE:
M-MALE

ROW NO: _____
1-SINGLE ROW

0-PA66 HoRS
1-PA66 HoRS+HF

COLOR:
A-BLACK
K-WHITE
S-NATURE

PIN Q'PY:
02~16

Ordering Information & Dimensions

Ploes	Dimensions(mm)			Ploes	Dimensions(mm)		
	A	B	C		A	B	C
02P	1.25	2.72	5.72	10P	11.25	12.72	15.72
03P	2.50	3.97	6.97	11P	12.50	13.97	16.97
04P	3.75	5.22	8.22	12P	13.75	15.22	18.22
05P	5.00	6.47	9.47	14P	16.25	17.72	20.72
06P	6.25	7.72	10.72	15P	17.50	18.97	21.97
07P	7.50	8.97	11.97	16P	18.75	20.22	23.22
08P	8.75	10.22	13.22	20P	23.75	25.22	28.22
09P	10.00	11.47	14.47	30P	36.25	37.72	40.72

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1254HM-1XXXX	DWG.NO: ENDE05	TITLE: Pitch 1.25mm MX单排带凸 HOUSING	REV: A0	SHEET: 1/1
A0	NEW RELEASE	21.11.17		SIZE: A4	LINEAR 0.00±0.25	ANGLES X°REF±6°	APPROVED	Wang_jr					
				0.00±0.10	X°X'±2°	DESIGNER	H_Gao	21.11.17	DRAWN	LC_Liu	21.11.17		