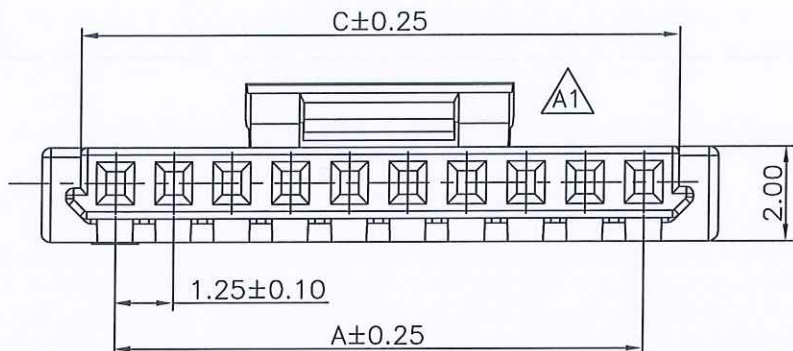


$$(\text{RoHS} + \text{HF})$$


6.P/N:

A1255 H M-1 XX X 0

SERIES NO:-

CONNECTOR:

H-HOUSING

MALE FEMALE:

M—MALE

—COLOR:

A-BLACK



S-NATURE

— PIN Q' PY:

02~10

—ROW NO:

1-SINGLE ROW

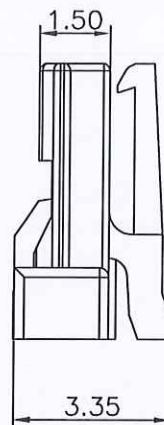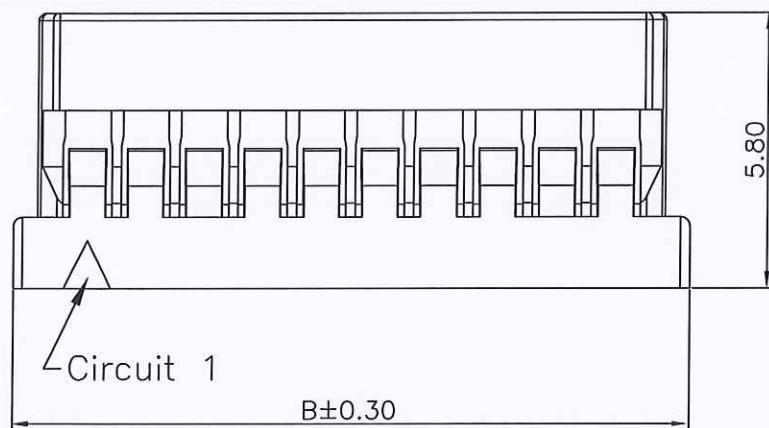

Circuit	Dimensions(mm)		
	A	B	C
02	1.25	4.40	2.75
03	2.50	5.65	4.00
04	3.75	6.90	5.25
05	5.00	8.15	6.50
06	6.25	9.40	7.75
07	7.50	10.65	9.00
08	8.75	11.90	10.25
09	10.00	13.15	11.50
10	11.25	14.40	12.75

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1255HM-1XXX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	王利平	24.2.27			
A1	MODIFIED IN KIND ON BASIS	24.02.27		0.0±0.35	X°REF±6°	DESIGNER	王利平	24.02.27	TITLE: Pitch 1.25mm 单排带扣胶壳 PA66无卤		
				UNIT:mm	0.00±0.25	X°±3°					
				SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	黄容强		24.02.27	
										REV: A1	SHEET: 1/1

 万连科技
WanLian Technology Co., Ltd

REV: A1	SHEET: 1/1
---------	------------