


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

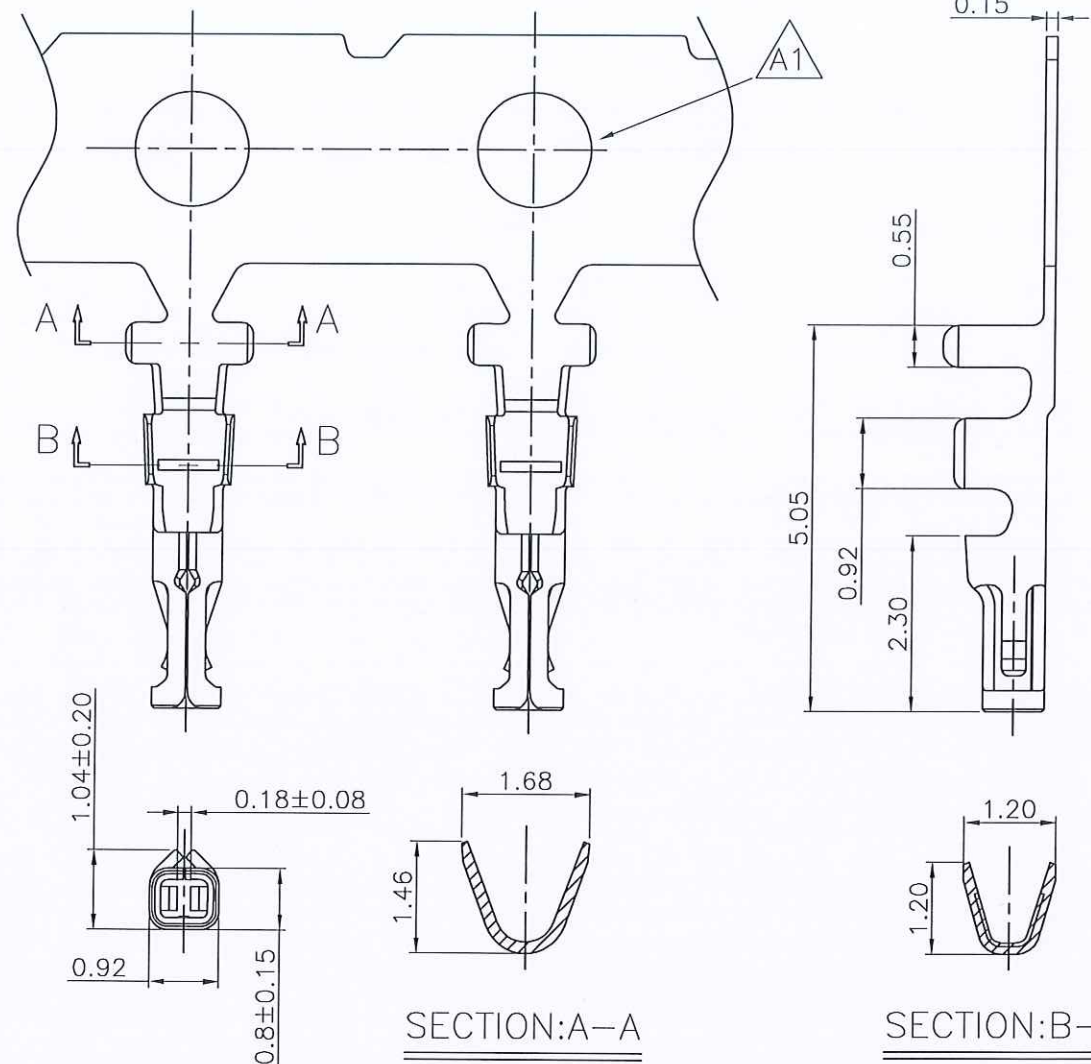

- NOTE:
- 1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
 - 2.PLATING SPECIFICATION:
2-1.CONTACTS:SN/GOLD PLATED OVER ALL.
 - 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A
3-2.VOLTAGE RATING: 150V MAX
3-3.CONTACT RESISTANCE: 30mΩ Max.
3-4.INSULATION RESISTANCE: 500MΩ MIN
3-5.WITHSTANDING VOLTAGE:500V AC Min
 - 4.OPERATING TEMPERATURE: -25°C~+85°C.
 - 5.PACKAGE SPEC: PAPER PLATE
 - 6.P/N:

SERIES NO: A1255 T F X-X
CONNECTOR: T-TERMINAL
MALE FEMALE: F-FEMALE M-MALE
PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS



REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	8/8/16	23.12.12	A1255TFX-X	ENDE05	
A1	MODIFIED IN KIND	23.12.12	UNIT:mm	0.00±0.25	X'±3'	DESIGNER	JYB	23.12.12	TITLE:	REV: A1	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	黄恩娟	23.12.12	Pitch 1.25mm 端子 AWG#28~#32		