
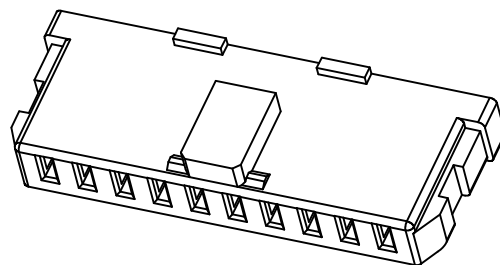

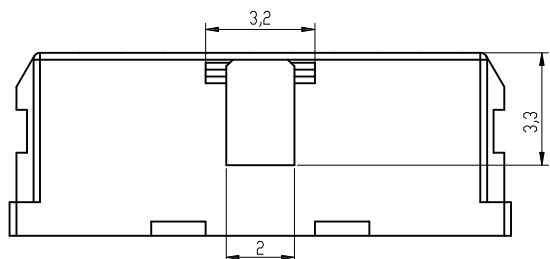
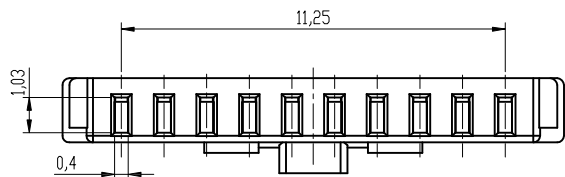
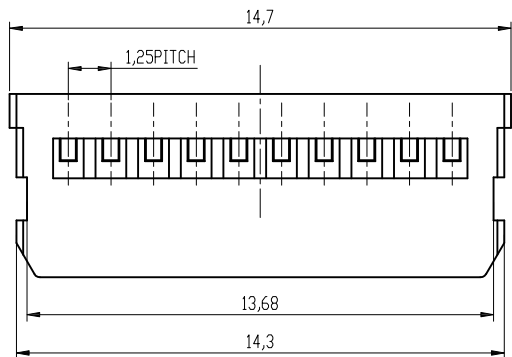


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS+HF

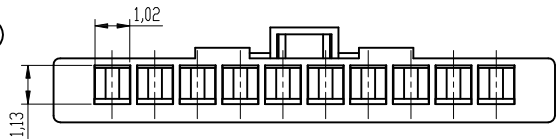

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.RETENTIVITY FORCE: 0.5KGF/pin min
 - 2-2.DURABILITY: 30 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 2.5A
 - RATED VOLTAGE : 200V AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 100MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+80°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

A125A H 1 M-1 10 X 0

SERIES NO: _____

CONNECTOR: _____

H-HOUSING

TYPE CODE: _____

MALE FEMALE: _____

M-MALE

COLOR:
A-BLACK
K-WHITE
S-NATURE

PIN Q'PY:
10PIN

ROW NO:
1-SINGLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.11.17		UNIT:mm	LINEAR 0.00±0.25	ANGLES X°±3°	APPROVED	Wang_jr	21.11.17	A125AH1M-110X0	
			SIZE: A4	0.000±0.10	X°X' ±2°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch 1.25mm 单排带扣加厚Housing		REV: A0
						DRAWN	Zijun_Huang	21.11.17			SHEET: 1/1