

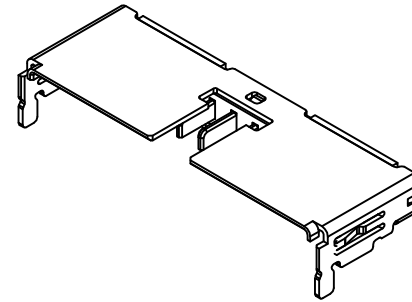
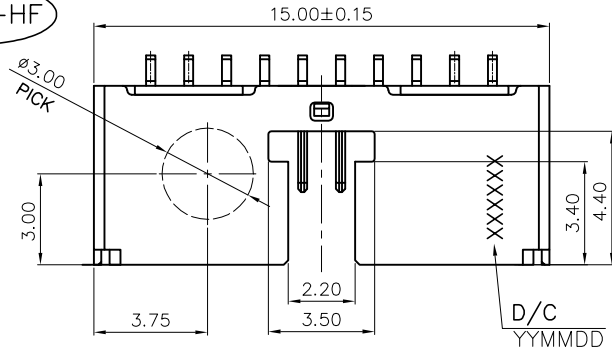


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



RoHS+HF

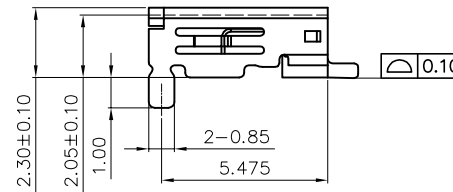

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: LCP,UL94V-0
 - CONTACTS: BRASS
 - SOLDER TABS: SUS304
 - PLATING SPECIFICATION:
 - CONTACTS:
 - 50u" MIN. NICKEL PLATING UNDAER OVERALL,
 - 60u" MIN. MATTE TIN PLATING ON SOLDER TAIL
 - GOLD FLASH PLATING ON CONTACT AREA.
 - SOLDER TABS:
 - NI 50u" MIN. PLATED OVER ALL.
 - MECHANICAL PERFORMANCE:
 - RETENTIVITY FORCE: 0.5KGF/pin min
 - DURABILITY: 30 CYCLES.
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 2.5A
 - RATED VOLTAGE : 200V AC/DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 100MΩ Min
 - DIELECTRIC WITHSTANDING : 500V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+80°C.
 - PACKAGE SPEC:REEL
 - P/N:

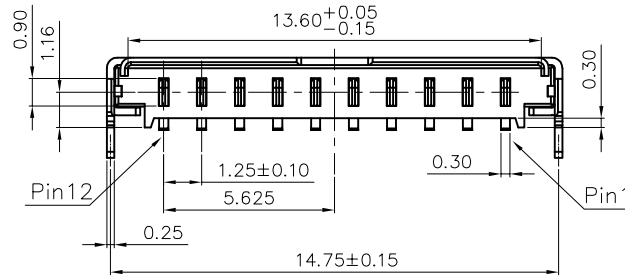

A125A W 9-1 10 2 X X 0
 SERIES NO: _____ COLOR: A-BLACK S-NATURE
 CONNECTOR: _____ W-WAFER
 ANGLE: _____ PLATING: A-ALL AU G/F C-BRIGHE TIN F-Gold flash on contact area
 9-90°
 ROW NO: _____ PIN Q'PY: _____
 1-SINGLE ROW 10pin
 _____ TERMPPOINT: 2-SMT

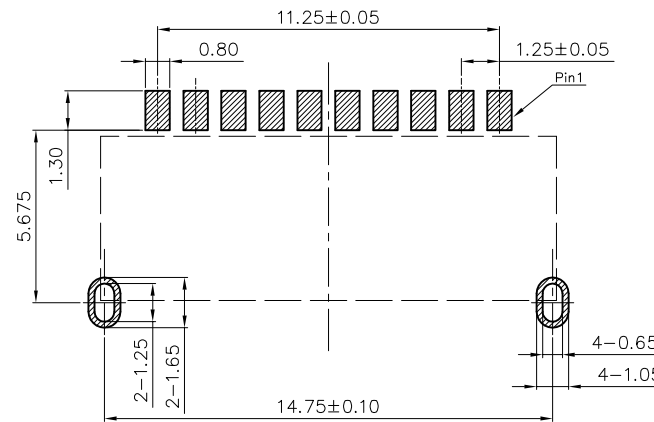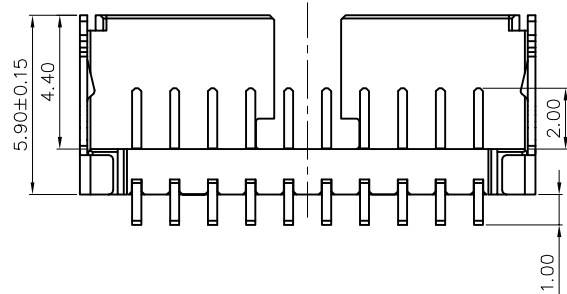


RECOMMENDED PCB LAYOUT TOLERANCE±0.05


REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.26	A125AW9-1102XX0	ENDE05	
A1	PART NUMBER RENEWAL	23.09.26	UNIT:mm	0.00±0.25	X°±3'	DESIGNER	Han_Gao	23.09.26	TITLE: Pitch 1.25mm 90°Battery H2.30单排卧贴+铁壳DIP Wafer	REV: A1	SHEET: 1/2
				0.00±0.10	X°X' ±2'	DRAWN	Zijun_Huang	23.09.26			

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF


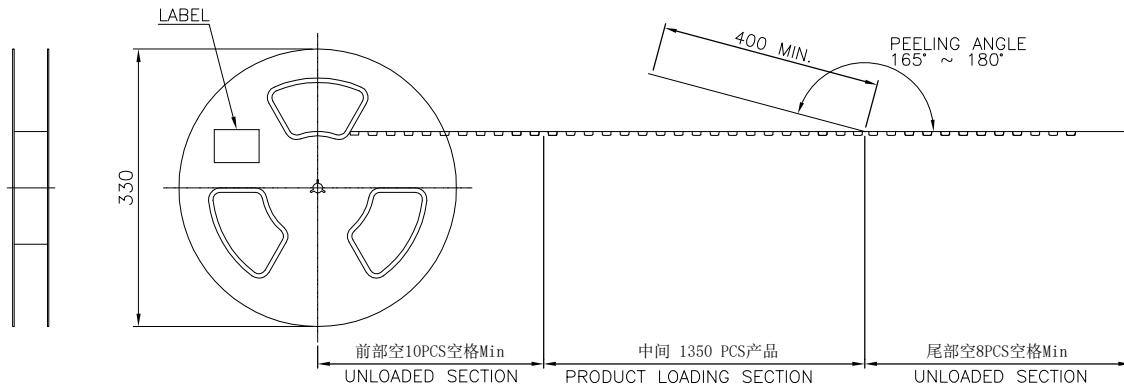


USER DIRECTION OF UNREELING

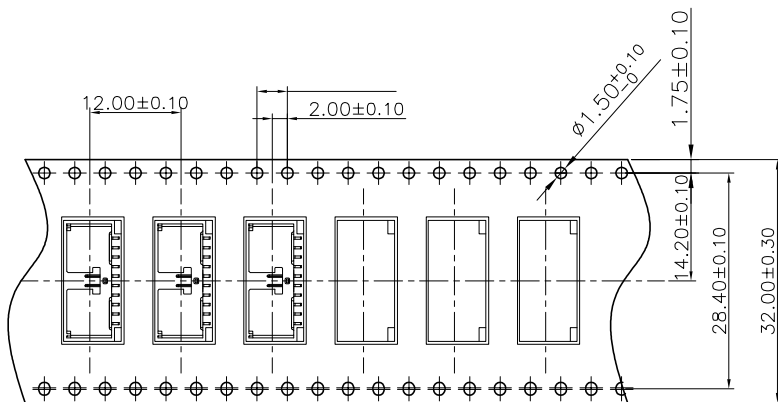

NOTE:

- MATERIAL:
BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR. (透明色)
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

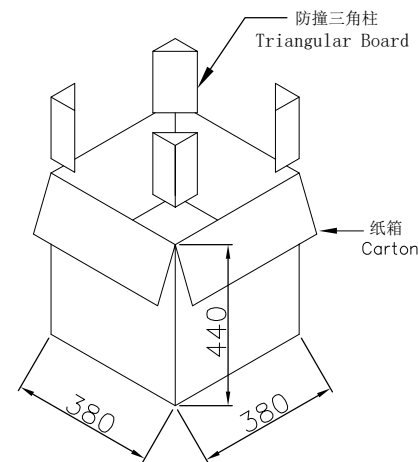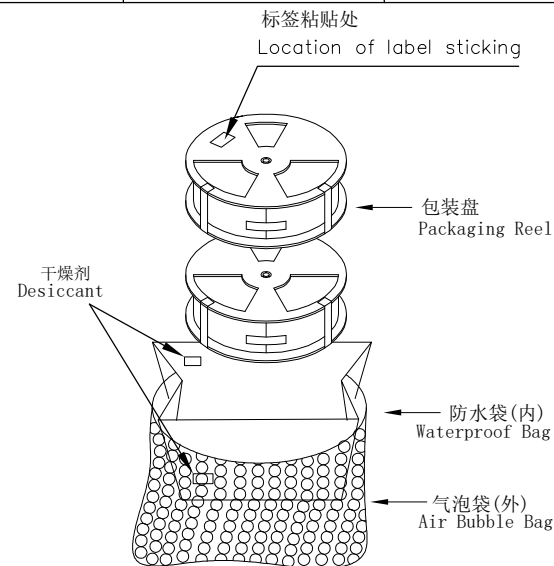

1350	11	14850 PCS	-- KG	--KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A125AW9-1102XX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	23.09.26			
A1	PART NUMBER RENEWAL	23.09.26	0.00±0.25	X'±3'	DESIGNER	Han_Gao	23.09.26	TITLE: 包装规范	REV: A1	SHEET: 2/2	
			0.00±0.10	X'X' ±2'	DRAWN	Zijun_Huang	23.09.26				