

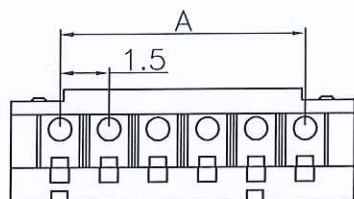


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



RoHS+HF

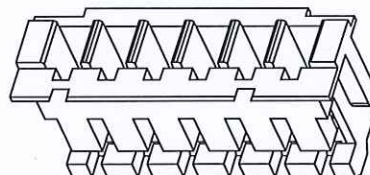



05-09P(两个缺口)



3D VIEW

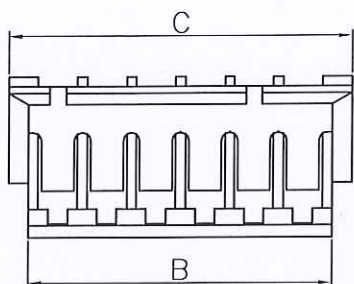

02-04P(一个缺口)

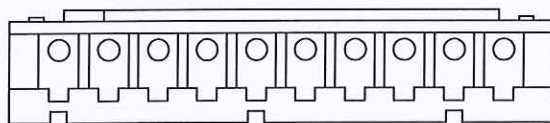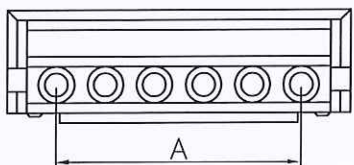

10-12P(三个缺口)

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA66

2.ELECTRICAL PERFORMANCE:

2-1.CURRENT RATING: 1.0A

2-2.CONTACT RESISTANCE: 20mΩ Max.

2-3.INSULATION RESISTANCE: 500MΩ MIN

2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC Min

3.ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25°C~+85°C.

4.PACKAGE SPEC: PE BAG

5.P/N ORDER:

SERIES NO: A1501 H M-1 XX X 0
CONNECTOR: H-HOUSING
MALE FEMALE: M-MALE
COLOR: A-BLACK S-NATURE
PIN Q'PY: 02~16
ROW NO: 1-SINGLE ROW

Ordering Information & Dimensions

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	1.50	3.30	4.50	10	13.50	15.30	16.50
03	3.00	4.80	6.00	11	15.00	16.80	18.00
04	4.50	6.30	7.50	12	16.50	18.30	19.50
05	6.00	7.80	9.00	13	18.00	19.80	21.00
06	7.50	9.30	10.50	14	19.50	21.30	22.50
07	9.00	10.80	12.00	15	21.00	22.80	24.00
08	10.50	12.30	13.50	16	22.50	24.30	25.50
09	12.00	13.80	15.00				

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	24.04.08		LINEAR	ANGLES	APPROVED	8/2/24	24.4.8	A1501HM-1XXX0	ENDE05	
				0.0±0.35	X'REF±6°	DESIGNER	黄思豪	24/04/08	TITLE:		
				UNIT:mm	0.00±0.25	X'±3'	DRAWN	侯兰雷	24.04.08	Pitch: 1.50 mm 2H单排公胶壳	
				SIZE: A4	0.000±0.10	X'X' ±2'					
										REV: AO	SHEET: 1/1