


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

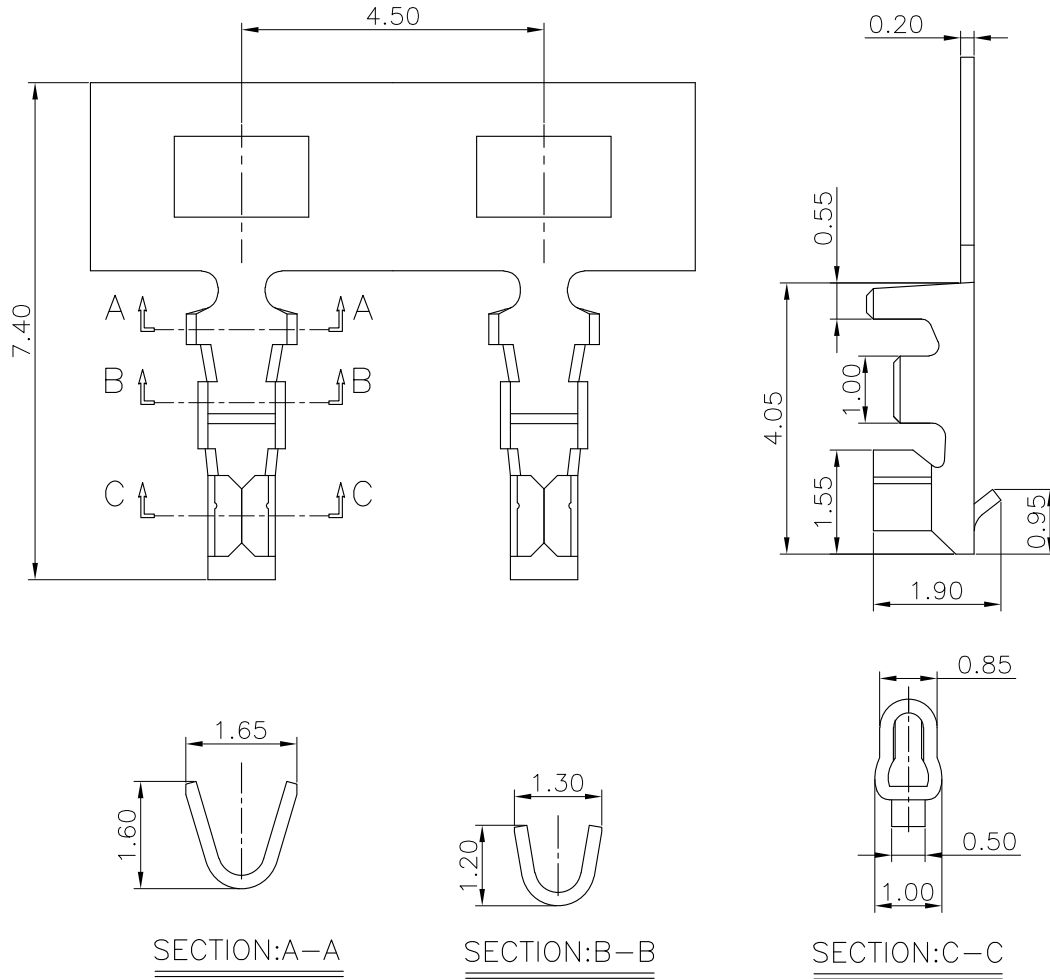

NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.TERMINAL: PHOSPHOR BRONZE  
 2.PLATING SPECIFICATION:  
 2-1.TERMINAL:  
 TIN/GOLD FLASH PLATED OVER ALL.  
 3.ELECTRICAL PERFORMANCE:  
 3-1.CURRENT RATING: 1A  
 RATED VOLTAGE : 50V  
 3-2.CONTACT RESISTANCE: 20 mΩ MAX  
 3-3.INSULATION RESISTANCE: 500MΩ Min  
 3-4.DIELECTRIC WITHSTANDING : 500V AC  
 4.ENVIRONMENTAL PERFORMANCE:  
 4-1.OPERATING TEMPERATURE: -25°C~+85°C.  
 5.PACKAGE SPEC: REEL  
 6.P/N: A1501 T 1 F X-X

SERIES NO: \_\_\_\_\_  
 CONNECTOR: \_\_\_\_\_  
 TYPE CODE \_\_\_\_\_  
 MALE FEMALE: \_\_\_\_\_

PLATING:  
 A-ALL AU G/F  
 C-BRIGHT TIN  
 D-MATTE TIN

METAL:  
 P-PHOSPHOR BRONZE  
 B-BRASS

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	A1501T1FX-X	ENDE05	
			UNIT:mm	0.00±0.25	X'±3°	CHECK	XueZe_Ma	22.10.28	TITLE:		WanLian Technology Co., Ltd REV: A0    SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	LanXuan_Hou	22.10.28	Pitch1.50 mm ZH 母端子 AWG#26-#30		