

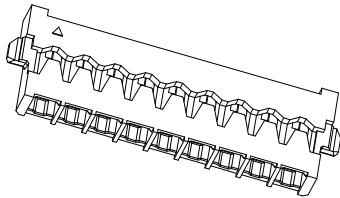
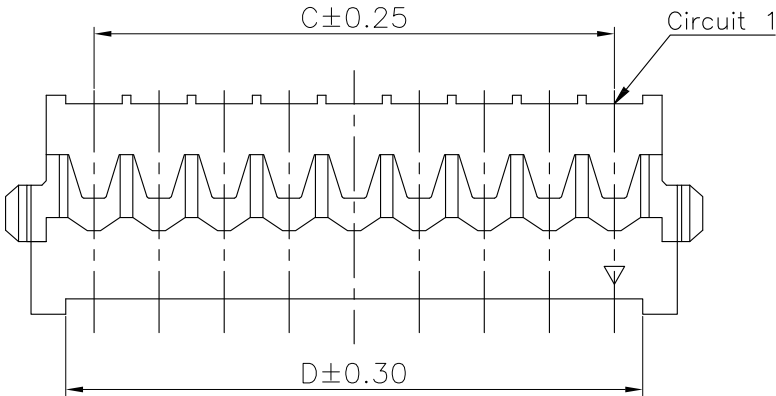
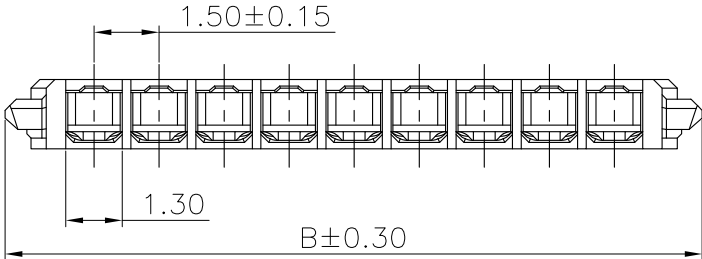


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

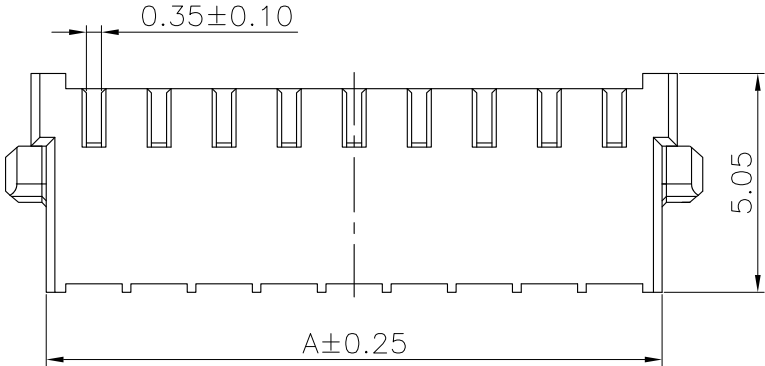

3D VIEW
1:2



NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA4T,UL94V-0
2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 3A
RATED VOLTAGE : 20V
2-2.CONTACT RESISTANCE: 30 mΩ MAX
2-3.INSULATION RESISTANCE: 100MΩ Min
2-4.DIELECTRIC WITHSTANDING : 250V AC
3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -25°C~+85°C.
4.PACKAGE SPEC:
5.P/N: PE BAG

SERIES NO: A1507 H M-1 XX X 0
COLOR:
A-BLACK
S-NATURE
CONNECTOR:
H-HOUSING
MALE FEMALE:
M-MALE
PIN Q'PY:
05~09
ROW NO:
1-SINGLE ROW

Circuit	Dimensions(mm)			
	A	B	C	D
5P	8.20	10.08	6.00	7.30
9P	14.20	16.08	12.00	13.30

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1507HM-1XXX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19			
				0.0±0.35	X°REF±6°				CHECK	XueZe_Ma	
				UNIT:mm	0.00±0.25	X°±3°	DRAWN	LanXuan_Hou			
			SIZE: A4	0.000±0.10	X°X' ±2°	TITLE: Pitch1.50mm 单排胶壳				REV: A0	SHEET: 1/1