

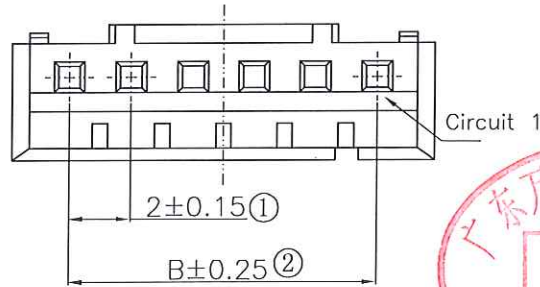
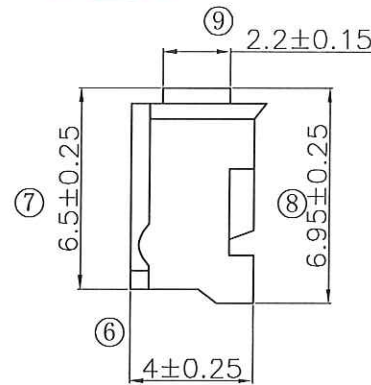


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

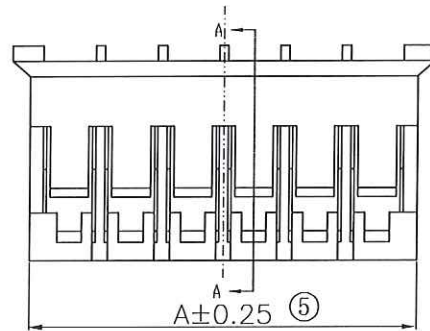

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA66
 2.ELECTRICAL PERFORMANCE:
 2-1.INSULATION RESISTANCE: 1000MΩ Min
 2-2.DIELECTRIC WITHSTANDING : 800V AC
 3.ENVIRONMENTAL PERFORMANCE:
 3-1.OPERATING TEMPERATURE: -25°C~+85°C.
 4.PACKAGE SPEC:
 5.P/N:

A2001 H M-1 XX X X
 SERIES NO: _____
 CONNECTOR: _____
 H-HOUSING
 MALE FEMALE: _____
 M-MALE
 F-FEMALE
 ROW NO: _____
 1-SINGLE ROW
 1-ROHS 2.0
 2-ROHS 2.0+HF
 COLOR:
 A-BLACK
 K-WHITE
 S-NATURE
 PIN Q' PY:
 02~16

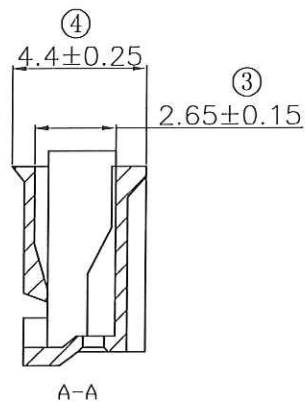

Circuit	Dimensions(mm)				
	A	B	Circuit	A	B
02	4.60	2.00	10	20.60	18.00
03	6.60	4.00	11	22.60	20.00
04	8.60	6.00	12	24.60	22.00
05	10.60	8.00	13	26.60	24.00
06	12.60	10.00	14	28.60	26.00
07	14.60	12.00	15	30.60	28.00
08	16.60	14.00	16	32.60	30.00
09	18.60	16.00			


REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13	LINEAR	1:1			A2001HM-1XXXX	ENDE05
A1	6PIN以上增加排气槽及示意图	23.01.09	0.0±0.35	APPROVED	梁林程	2024.6.18		
			0.00±0.25	DESIGNER	梁林程	2024.6.18	TITLE:	
			0.000±0.10	DRAWN	肖西峰	2024.6.18	Pitch2.00mm 180° Housing male	REV: A1




WanLian Technology Co., Ltd

SHEET: 1/3


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements




2 PIN




3 PIN




4 PIN

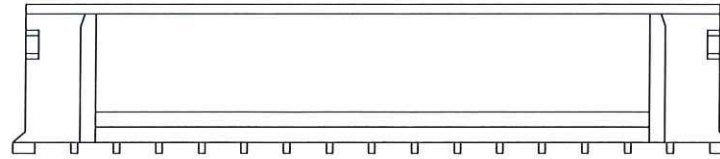


4 PIN 以上




2 PIN




3 PIN




4 PIN




5 PIN




6 PIN




7 PIN




8 PIN




9 PIN




10 PIN



11 PIN



12 PIN



16 PIN 如图所示 每逢五孔加一个卡槽




REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.01.13		LINEAR	ANGLES	APPROVED	梁林秋	2024.6.18	A2001HM-1XXXX	ENDE05	
A1	6PIN以上增加排气槽及示意图		UNIT:mm	X'REF±6'	DESIGNER	梁林秋	2024.6.18	TITLE:		REV: A1	SHEET: 2/3
			SIZE: A4	X'±3'	DRAWN	梁林秋	2024.6.18	Pitch2.00mm 180° Housing male			

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

CARTON

POLY BAG



Poles	QUALITY	
	PCS/BAG	PCS/CARTON
2	2000	72000
3	2000	72000
4	2000	72000
5	2000	72000
6	2000	72000
7	2000	72000
8	2000	72000
9	1000	36000
10	1000	36000
11	1000	36000
12	1000	36000
13	1000	36000
14	1000	36000
15	1000	36000
16	1000	36000

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13			LINEAR	ANGLES	APPROVED	<i>梁林权</i>	2024.6.18	A2001HM-1XXXX
A1	6PIN以上增加排气槽及示意图			0.0±0.35	X'REF±6'	DESIGNER	<i>梁林权</i>	2024.6.18	TITLE: Pitch2.00mm 180° Housing male	
			UNIT:mm	0.00±0.25	X'±3'	DRAWN	<i>肖雨羲</i>	2024.6.18		
			SIZE: A4	0.000±0.10	X'X' ±2'				REV: A1	SHEET: 3/3

