

The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS+HF

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: LCP,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 1.2KGF/Pin Min
 - 3-2.DURABILITY: 30 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 2A AC/DC
RATED VOLTAGE : 100V AC/DC
 - 4-2.CONTACT RESISTANCE: 10 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 800V
- 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 6.PACKAGE SPEC: REEL
- 7.P/N:

A2001 F 9 3-1 XX 1 X X 0

SERIES NO:

CONNECTOR:
W-WAFER

ANGLE:
9-90°

TYPE:
3-TYPE 3



ROW NO:
1-SINGLE ROW

COLOR:
A-BLACK
S-NATURE





PLATING:
A-ALL AU G/F
C-BRIGHT TIN
D-MATTE Tin

TERMIPOINT:
1-DIP

PIN Q'PY:
02~16

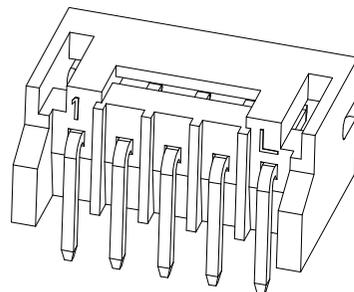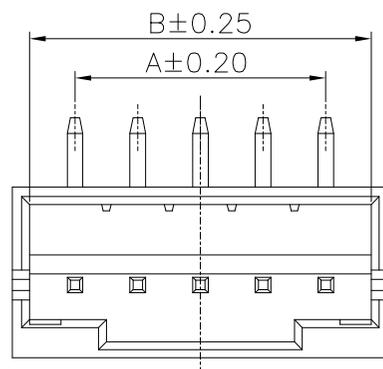

3D VIEW

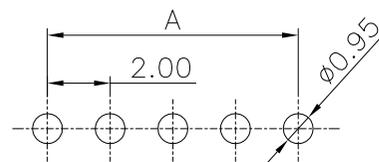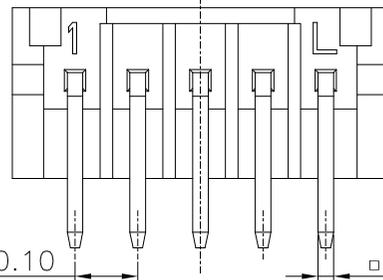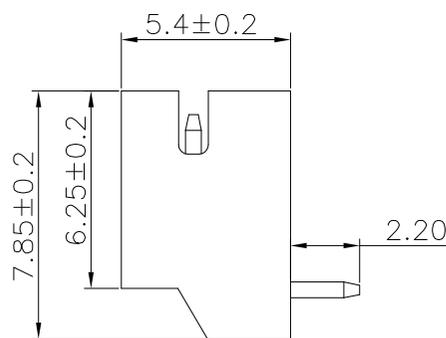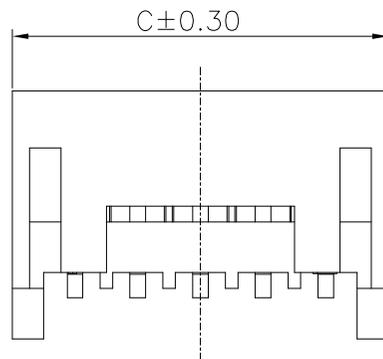



RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05mm

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
02	---	4.90	6.00	10	18.00	20.90	22.00
03	4.00	6.90	8.00	11	20.00	22.90	24.00
04	6.00	8.90	10.00	12	22.00	24.90	26.00
05	8.00	10.90	12.00	13	24.00	26.90	28.00
06	10.00	12.90	14.00	14	26.00	28.90	30.00
07	12.00	14.90	16.00	15	28.00	30.90	32.00
08	14.00	16.90	18.00	16	30.00	32.90	34.00
09	16.00	18.90	20.00				

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.09.08		LINEAR	ANGLES	APPROVED	Wang_jr	22.09.08	A2001W93-1XX1XX0	ENDE05	
			0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	22.09.08	TITLE:		REV: A0	SHEET: 1/2
			0.00±0.25	X°±3°	DRAWN	LanXuan_Hou	22.09.08	Pitch 2.0mm 90°PH单排卧插带定位墙 Wafer			
			SIZE: A4	0.000±0.10	X'X' ±2°						


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS+HF



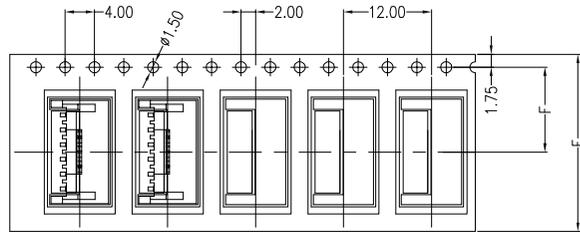


02~06 CONTACTS

引出方向

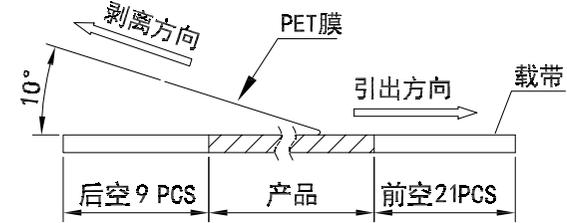

(PET膜剥离示意图)

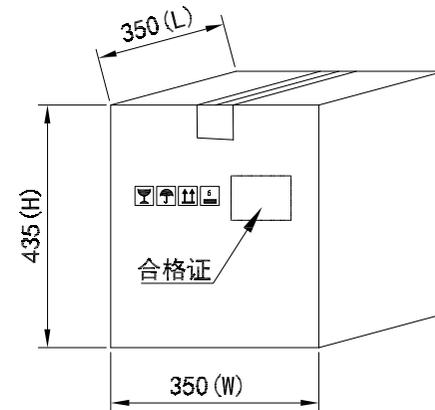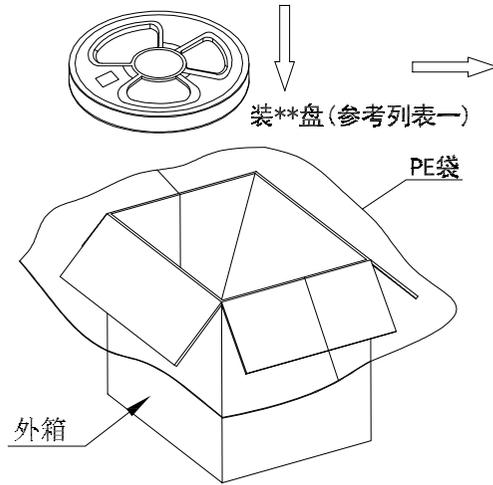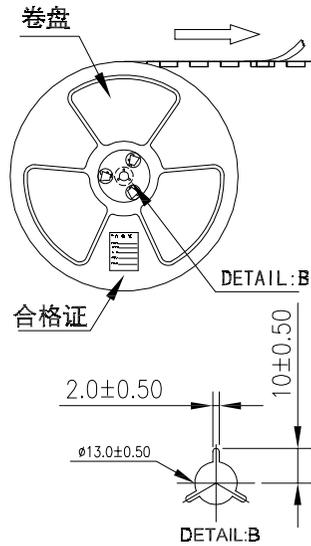

包装说明:

1. 把成品包入卷盘中, 每盘装600PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴贴上合格证.
2. 所有材料有害物控制需符合RoHS标准.

列表一

Circuits	DIM. E	DIM. F	Q'ty/Reel	Packing (Reel/Caton)
02~03PIN	16.00	7.50	600PCS	20/Reel
04~06PIN	24.00	11.50	600PCS	15/Reel

REV.	REVISION RECORD	DATE	☉	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.09.08		LINEAR	ANGLES	APPROVED	Wang_jr	22.09.08	A20013F9-1XX1XX0	ENDE05	
			UNIT:mm	X°REF±6'	DESIGNER	Han_Gao	22.09.08	TITLE:			
			SIZE: A4	X°X' ±2'	DRAWN	LanXuan_Hou	22.09.08	包装规范			



WanLian Technology Co., Ltd

REV: A0 SHEET: 2/2