
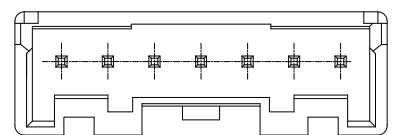
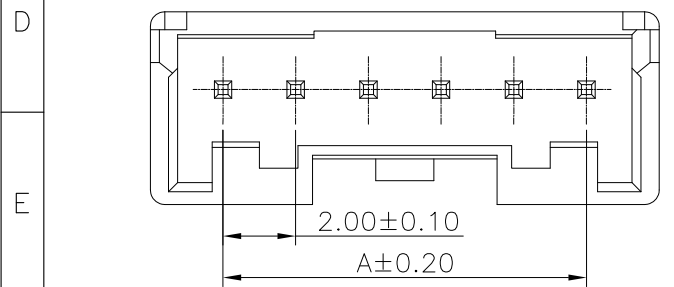
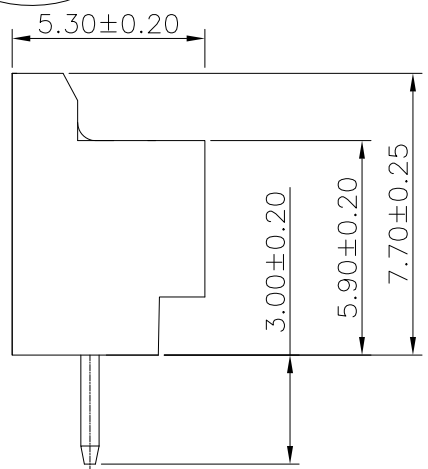




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING:PB=PBT UL94V-0
 - TERMINAL:BRASS
 - PLATING SPECIFICATION:
 - TERMINAL:
 - AC=BRIGHT TIN.
 - MECHANICAL PERFORMANCE:
 - INSERTION FORCE: 1.8kgf/PIN MAX
 - REMOVAL FORCE: 0.6kgf/PIN MIN
 - DURABILITY: 30 CYCLES.
 - ELECTRICAL PERFORMANCE:
 - RATED CURRENT : 3A
RATED VOLTAGE : 250V AC/DC
 - INSULATION RESISTANCE: 1000MΩ MIN
CONTACT RESISTANCE : 20mΩ MAX
 - WITHSTANDING VOLTAGE:AC 800V/1minute
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - PACKAGE SPEC:PE BAG

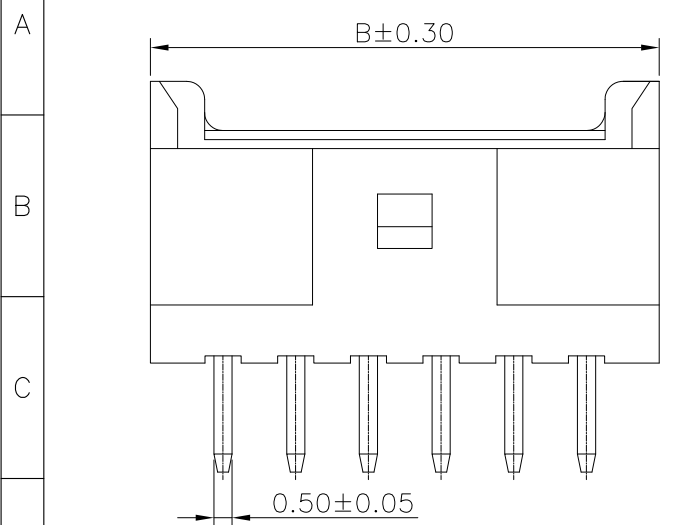

7~9A

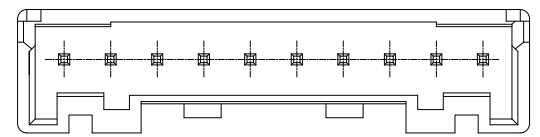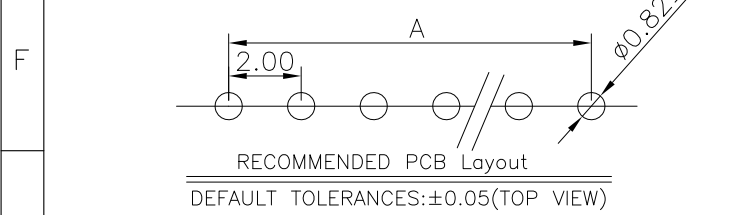

10~16A

△ A2002 W 0-1 XX 1 X X 0

SERIES NO: _____ COLOR: A-BLACK K-WHITE

CONNECTOR: W-WAFER PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE Tin

ANGLE: 0-180°

ROW NO: 1-SINGLE ROW

PIN Q'PY: 02~16 TERMIPOINT: 1-DIP

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	---	6.00	10	18.00	22.00
03	4.00	8.00	11	20.00	24.00
04	6.00	10.00	12	22.00	26.00
05	8.00	12.00			
06	10.00	14.00			
07	12.00	16.00			
08	14.00	18.00	16	30.00	34.00
09	16.00	20.00			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	21.01.13	LINEAR	APPROVED	Wang_jr	23.9.16	A2002W0-1XX1XX0	ENDE05
A1	PART NUMBER RENEWAL	23.9.16	ANGLES	DESIGNER	Han_Gao	23.9.16		
			0.00±0.35	UNIT:mm			TITLE:	
			0.00±0.25	SIZE: A4			PITCH 2.00mm 180° PA SINGLE ROW DIP WAFER	REV: A1
			0.000±0.10					SHEET: 1/1



WanLian Technology Co., Ltd