
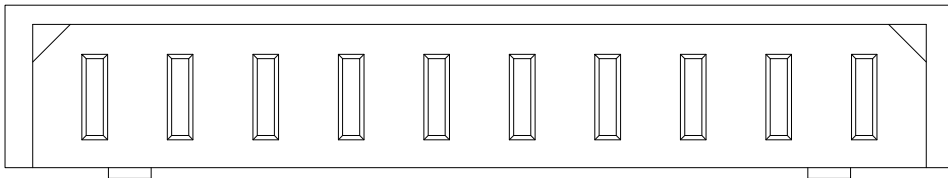
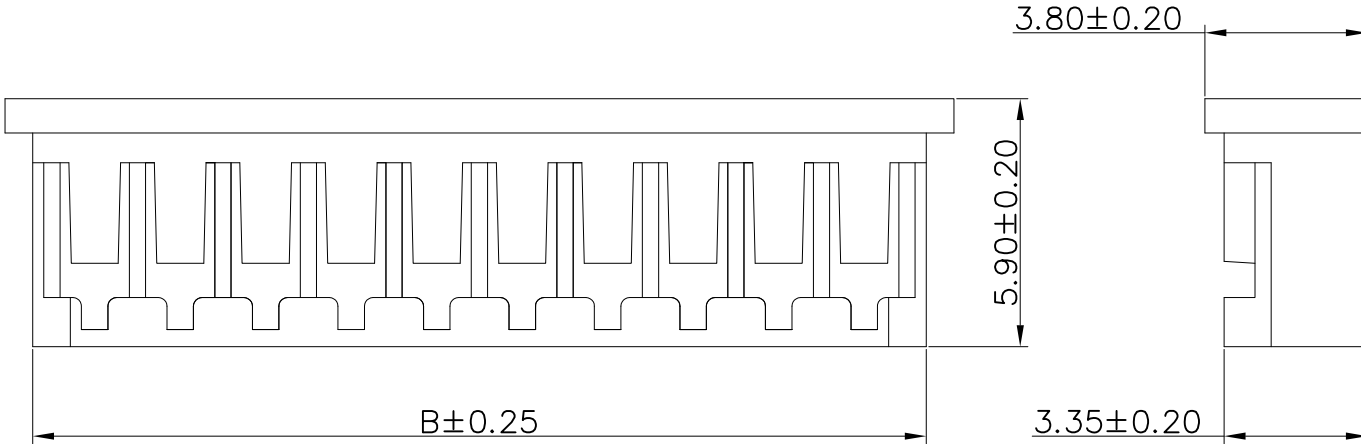


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

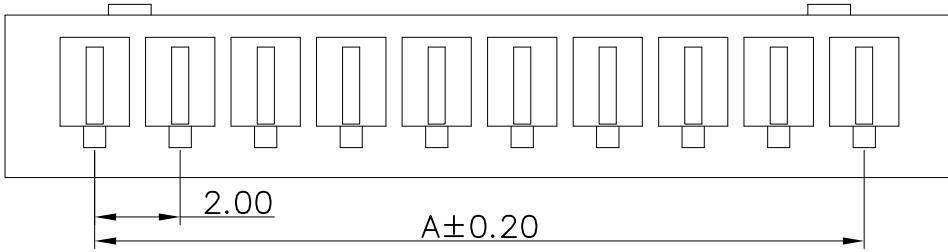

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA66,UL94V-0
 2.MECHANICAL PERFORMANCE:
 2-1.RETENTIVITY FORCE: 1.0KGF/pin min
 2-2.DURABILITY: 50 CYCLES.
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 2A
 RATED VOLTAGE : 125V AC/DC
 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 800V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
 5.PACKAGE SPEC:PE BAG
 6.P/N:

SERIES NO: A2004 H M-1 XX X 0
 COLOR:
 A-BLACK
 K-WHITE
 S-NATURE
 CONNECTOR:
 H-HOUSING
 MALE FEMALE:
 M-MALE
 PIN Q'PY:
 02~ 20
 ROW NO:
 1-SINGLE ROW

Ordering Information & Dimensions

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.00	5.00	12	22.00	25.00
03	4.00	7.00	13	24.00	27.00
04	6.00	9.00	14	26.00	29.00
05	8.00	11.00	15	28.00	31.00
06	10.00	13.00	16	30.00	33.00
07	12.00	15.00	17	32.00	35.00
08	14.00	17.00	18	34.00	37.00
09	16.00	19.00	19	36.00	39.00
10	18.00	21.00	20	38.00	41.00
11	20.00	23.00			

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	Wang_jr	21.11.17	A2004HM-1XXX0	ENDE05	
			0.0±0.35	X*REF±6°	APPROVED	Han_Gao	21.11.17	TITLE:	REV: A0	
			UNIT: mm	X*±3°	DESIGNER	Zijun_Huang	21.11.17	Pitch2.00mm MX 180°单排带凸Housing	SHEET: 1/1	
			SIZE: A4	0.000±0.10	X*X' ±2°	DRAWN				