


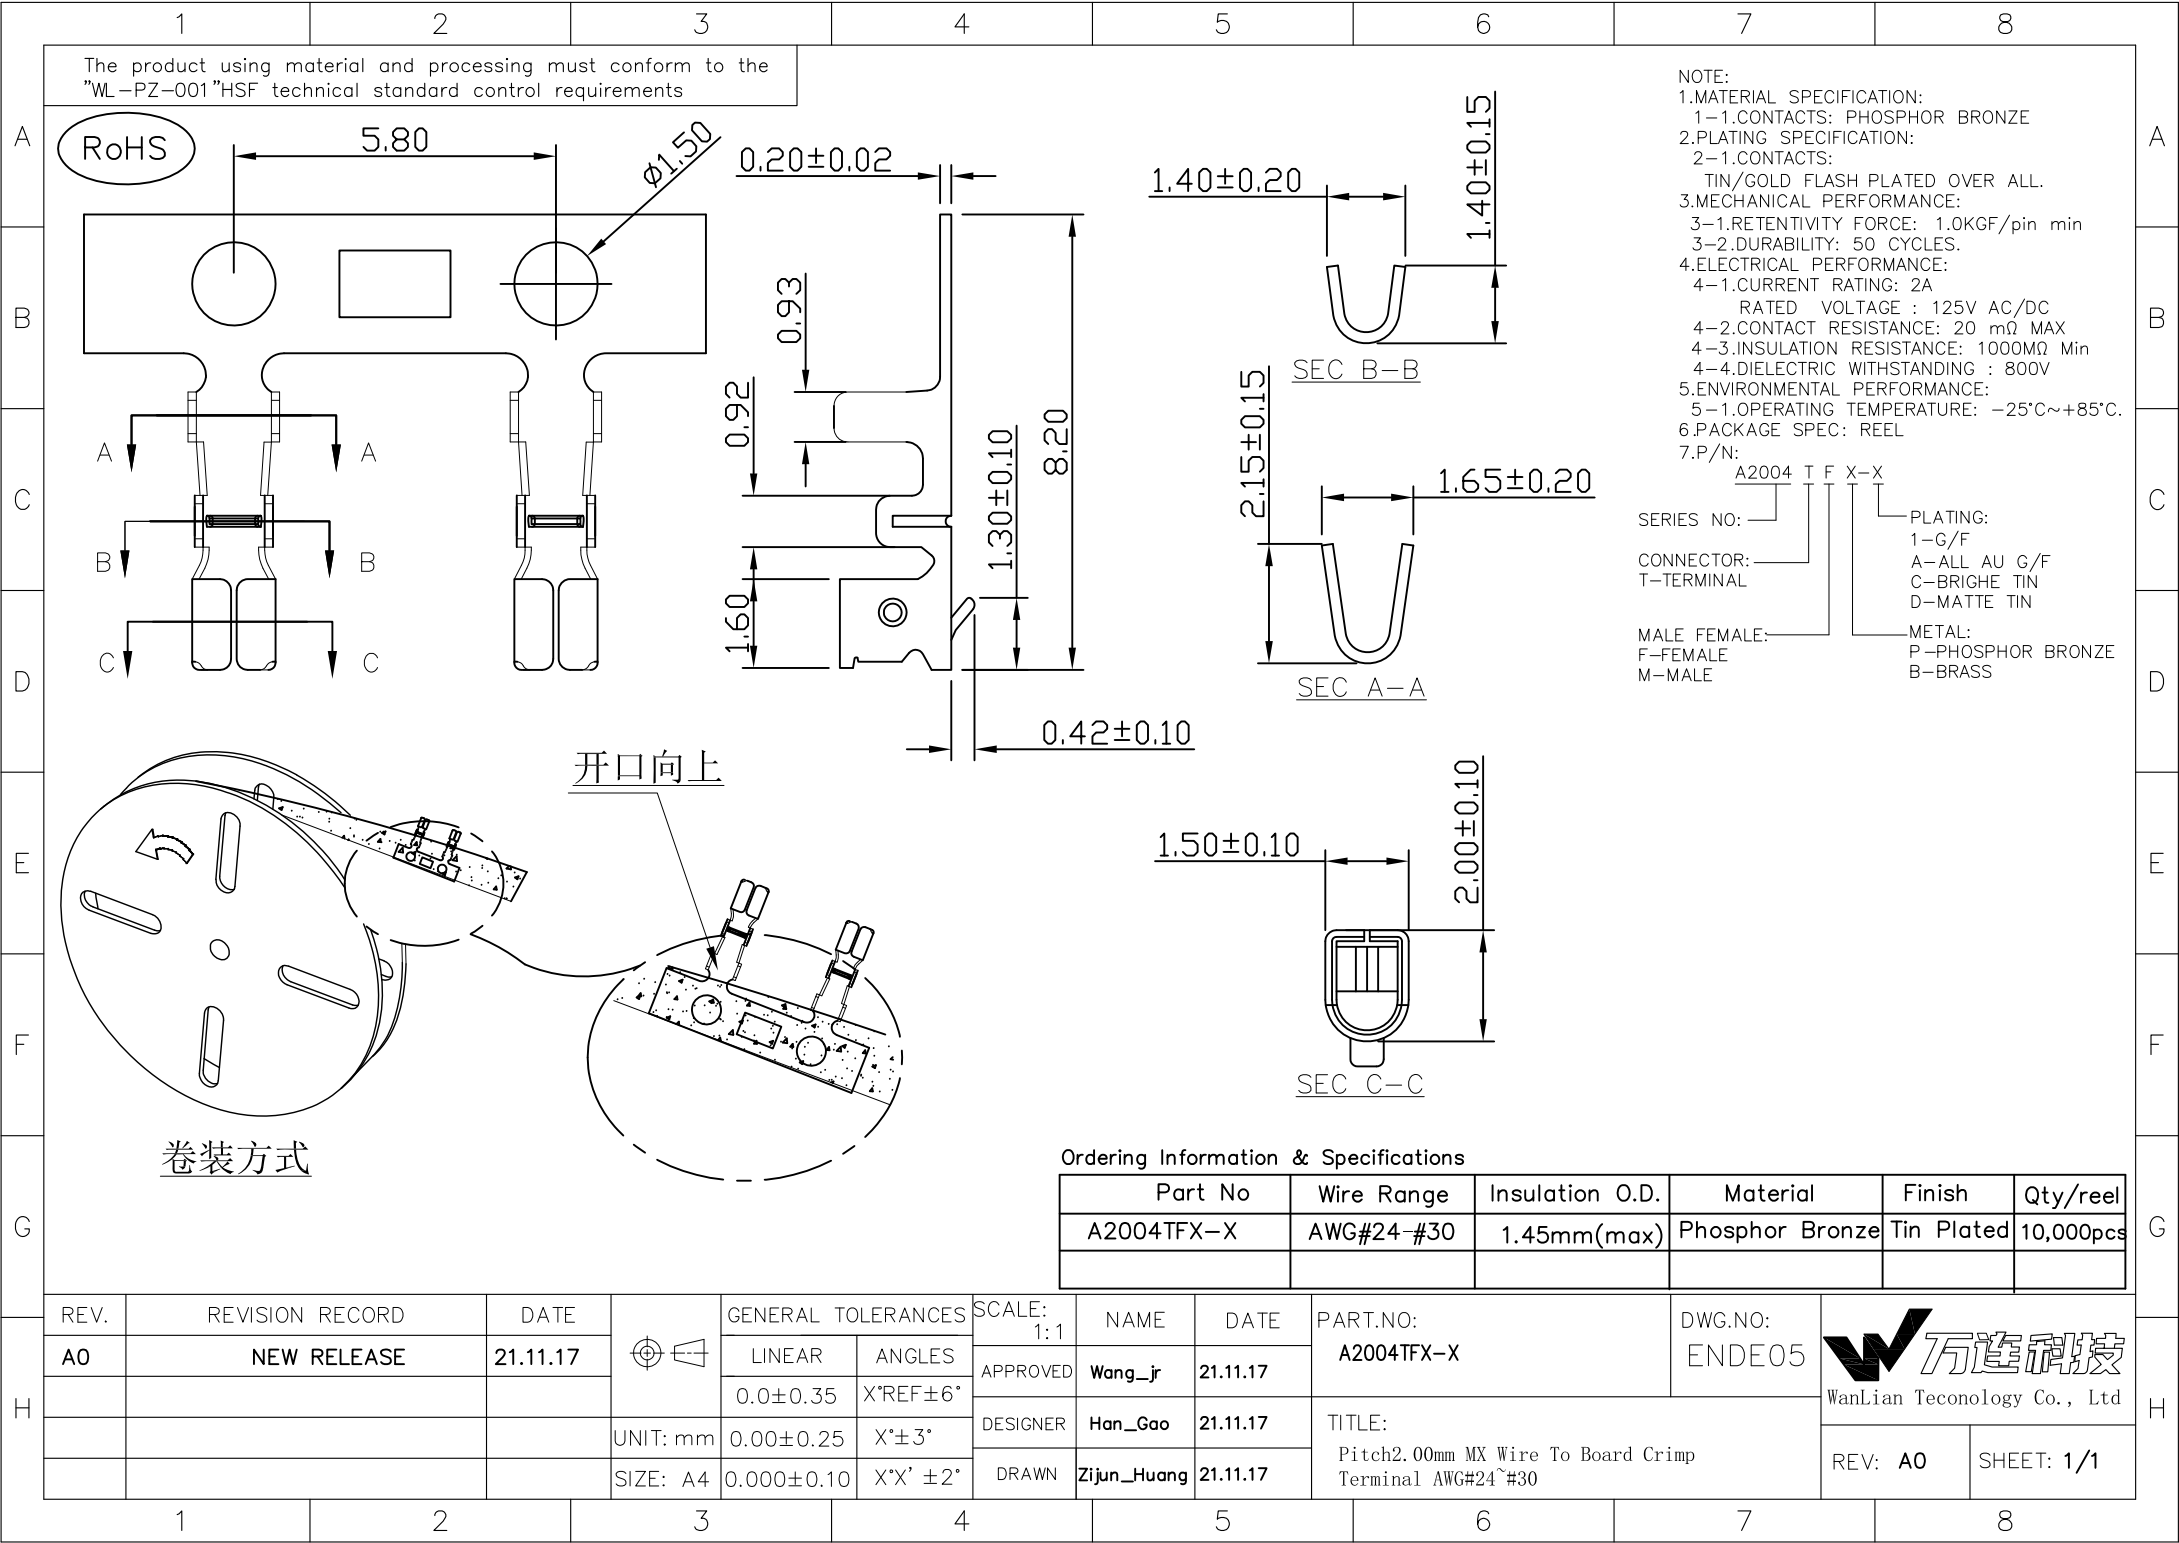

The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

NOTE:
1.MATERIAL SPECIFICATION:
1-1.CONTACTS: PHOSPHOR BRONZE
2.PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
3.MECHANICAL PERFORMANCE:
3-1.RETENTIVITY FORCE: 1.0KGF/pin min
3-2.DURABILITY: 50 CYCLES.
4.ELECTRICAL PERFORMANCE:
4-1.CURRENT RATING: 2A
RATED VOLTAGE : 125V AC/DC
4-2.CONTACT RESISTANCE: 20 mΩ MAX
4-3.INSULATION RESISTANCE: 1000MΩ Min
4-4.DIELECTRIC WITHSTANDING : 800V
5.ENVIRONMENTAL PERFORMANCE:
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
6.PACKAGE SPEC: REEL
7.P/N:

SERIES NO: A2004 T F X-X
CONNECTOR: T-TERMINAL
MALE FEMALE: F-FEMALE M-MALE
PLATING:
1-G/F
A-ALL AU G/F
C-BRIGHE TIN
D-MATTE TIN
METAL:
P-PHOSPHOR BRONZE
B-BRASS

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2004TFX-X	AWG#24-#30	1.45mm(max)	Phosphor Bronze	Tin Plated	10,000pcs

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES						
				0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.11.17	A2004TFX-X	ENDE05	WanLian Teconology Co., Ltd
				0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17			
				0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17			

TITLE:
Pitch2.00mm MX Wire To Board Crimp
Terminal AWG#24~#30

REV: A0 SHEET: 1/1